

# WOODS

## LANDSCAPE EQUIPMENT



A full line of tools to tackle  
a variety of yard and garden projects

**WOODS**

### Table of Contents

Contents

<b>Box Scrapers</b> .....	4	<b>Disc Harrows</b> .....	20
From the reinforced steel A-frame to the tough, reversible cutting edge, our Woods and Gannon brand box scrapers deliver exceptional quality and versatility.		Whether breaking ground or tilling existing plots, Woods disc harrows are a rugged must-have tool for gardens, nurseries, food plots and small-acreage farms.	
<b>Grading Scrapers</b> .....	8	<b>Rotary Tillers</b> .....	22
Woods grading scrapers are designed to handle more material in fewer passes.		Woods' line of forward and reverse rotation tillers couple the best design features with outstanding performance for your landscaping and gardening projects.	
<b>Rear Blades</b> .....	10	<b>Post Hole Diggers</b> .....	26
Grading dirt or driveways, cleaning up construction sites, or moving snow – rely on Woods durable rear blades for maximum performance.		Whatever the soil conditions, count on Woods post hole diggers for tree and shrub planting, deck or fence post installation and many other digging needs.	
<b>Landscape Rakes</b> .....	14	<b>Chippers</b> .....	28
Woods landscape rakes are built for both tough clean-up jobs and fine raking.		Woods chippers and chipper/shredders are PTO-driven with a three-point hitch mount to make quick work of creating mulch for your garden or clearing new-growth trees.	
<b>Cultipackers</b> .....	16	<b>Stump Grinders</b> .....	30
This easy to use seed bed tool improves seed-to-soil contact for higher germination rates.		Reduce tree stumps to mulch in minutes and grind below ground level with a Woods PTO-powered stump grinder.	
<b>Seeders</b> .....	18	<b>Quick Hitch</b> .....	31
The versatile Food Plot Seeder and Precision Super Seeder can handle primary seeding, over-seeding, inter-seeding, and applications such as native grasses and food plots.		Woods Quick Hitch makes easy work of changing from one three-point attachment to another.	



C84

## Legend

### Standard-duty

Designed and manufactured for typical usage and basic applications.

### Medium-duty

Designed and manufactured for harsher usage and tougher applications.

### Heavy-duty

Designed and manufactured for extreme usage and the most demanding applications.



Woods products are proudly made in the USA. As part of a global economy, we work with business partners around the world and export our equipment to international markets. Since 1946, we've been manufacturing in Oregon, Illinois, and supporting the growth of American jobs.

## Woods

GENUINE PARTS

Maintain the quality and performance of your Woods equipment with Woods genuine replacement parts, paint, and lubricants. Available from your authorized Woods dealer.

### Find a Woods Dealer

Woods equipment is distributed through a network of authorized dealers. To find your nearest store visit us at [woodsequipment.com](http://woodsequipment.com) or call 800-319-6637.

## Power to be more productive

**Whether your landscape projects are contained in your own backyard or the way you make your living, you want equipment that's easy to use, easy to maintain, and built to last. That's what Woods delivers.**

**We build a full line of tools to tackle a variety of projects, such as putting in a new garden, reshaping a driveway, or seeding a lawn. We'll help you get the most out of the investment you've made in your tractor. And, at the end of the day, we'll help you feel good about all the chores you checked off your list.**

**Put it all together and you've got Woods Power — the power to be more productive.**



DHS64

# WOODS

## Box Scrapers

Box Scrapers



Tackle the toughest spreading and grading jobs with Woods and Gannon® brand box scrapers. From the reinforced steel A-frame to the tough, reversible cutting edge and replaceable scarifiers, our box scrapers deliver exceptional durability and versatility.

- Easily carve into sod and dirt with full-length, high-strength double beveled cutting edges
- Tackle the most rugged jobs with high-strength moldboards
- Choose widths from 48- to 96-inches to suit a variety of jobs
- Ensure faster, easier and safer hook-ups with ASABE Quick-Hitch compatibility

### Standard-duty

Tractor HP range: up to 25 hp

#### Model

**GBC48** 48-inch

- Three-point hitch: Cat 0, Limited 1 and 1
- End Plates: .179-inch
- Half-inch by six-inch reversible beveled cutting edges
- Four adjustable, three-position scarifiers
- Fourteen and one-half-inch moldboard

Tractor HP range: up to 45 hp

#### Models

**BSS54** 54-inch  
**BSS60** 60-inch  
**BSS65** 65-inch  
**BSS72** 72-inch

- Three-point hitch: Cat 1
- End plates: .375-inch
- Heavy steel plate A-frame mast
- Reversible/replaceable high-carbon cutting edges



## Medium-duty

Tractor HP range: 40–65 hp

### Models

**BSM72** 72-inch

**BSM84** 84-inch

- Three-point hitch: Cat 1 and 2
- The BSM Series offers an optional floating, hinged tailgate to provide maximum down force on the cutting edge
- End plates: .5-inch
- Quarter-inch plate welded inside of end plates to increase life

Specifications	GBC48	BSS54	BSS60	BSS65	BSS72	BSM72	BSM84
<b>Tractor Engine HP</b>	up to 25 hp	up to 45 hp				40–65 hp	
<b>Tractor Hitch</b>	Cat 0, Limited 1 and 1	Cat 1				Cat 1 and 2	
<b>Working Width</b>	48"	54"	60"	65"	72"		84"
<b>Approximate Weight</b>	285 lbs	486 lbs	514 lbs	528 lbs	551 lbs	680 lbs	750 lbs
<b>Capacity</b>	6.8 cu ft	10.3 cu ft	11.5 cu ft	12.5 cu ft	13.8 cu ft	13.8 cu ft	16.2 cu ft
<b>End Plate Thickness</b>	.179"	.375"				.5"	
<b>Moldboard Thickness</b>	.188"				.25"		
<b>Scarifier Depth</b>	0"–1.5"	0", 1.5" or 3" adjustable					
<b>Number of Scarifiers</b>	4	4	5	5	6	6	7
<b>Tailgate Type</b>	fixed					fixed, floating optional	
<b>Cutting Edges</b>	2						
<b>ASABE Quick-Hitch Compatible</b>	yes						
	Standard-duty					Medium-duty	

# WOODS

## Industrial Box Scrapers

Industrial Box Scrapers




Take advantage of the Gannon® name recognized throughout the construction industry as having superior durability, quality and strength.

- Ideal for landscapers, farmers, contractors, and municipalities
- Scarify, level, grade and backfill

Specifications	72HSD	76HSD	80HSD	84HSD	88HSD	92HSD	80HXD	84HXD	88HXD	92HXD	96HXD	
<b>Tractor Engine HP</b>	40–90 hp						40–100 hp					
<b>Tractor Hitch</b>	Cat 2											
<b>Working Width</b>	72"	76"	80"	84"	88"	92"	80"	84"	88"	92"	96"	
<b>Height</b>	24.5"											
<b>Operating Weight</b>	1,230 lbs	1,247 lbs	1,263 lbs	1,280 lbs	1,297 lbs	1,310 lbs	1,236 lbs	1,280 lbs	1,297 lbs	1,310 lbs	1,327 lbs	
<b>Depth</b>	40.188"											
<b>Heaped Capacity</b>	25.7 cu ft	27.0 cu ft	28.6 cu ft	30.0 cu ft	31.6 cu ft	32.9 cu ft	28.6 cu ft	30.0 cu ft	31.6 cu ft	32.9 cu ft	34.3 cu ft	
<b>End Plate Thickness</b>	.5"											
<b>Replacement End Plate Wear Bits</b>	yes						no					
<b>Number of Cutting Edges</b>	2											
<b>Cutting Edge Size</b>	.5" x 6"											
<b>Number of Scarifiers</b>	8											
<b>Optional Tailgate</b>	-	-	-	-	-	-	-	-	-	-	-	
	Heavy-duty											

### Backfill Moldboard

Available in full height (shown) for maximum strength and capacity, or hinged tailgate for precise grading

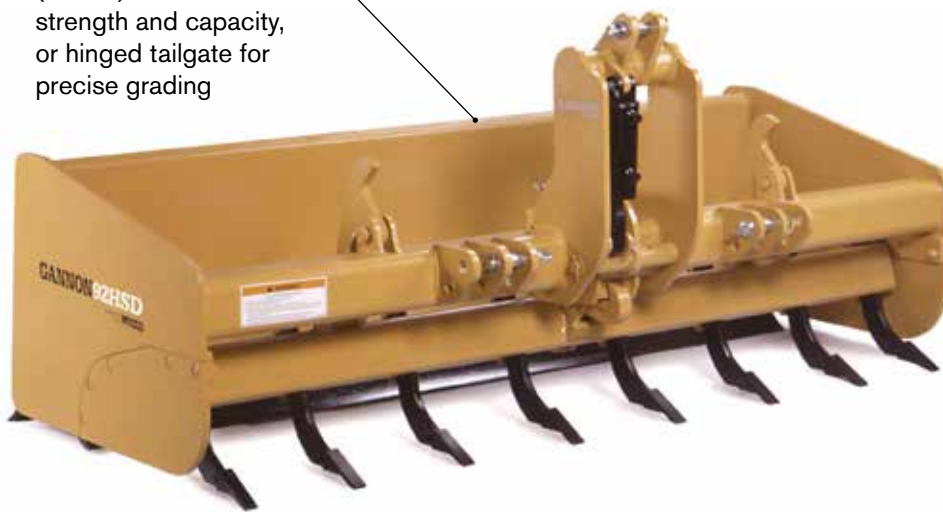

### Interchangeable and Reversible Cutting Edges

Strong, wear-resistant cutting edges are interchangeable and reversible

## Industrial 4 x 2 and 4 x 4 Series

Tractor HP range: 40–100 hp

- Three-point hitch: Cat 1 and 2
- Available in 65- to 96-inch widths
- Large capacity box — no gussets or bars to obstruct material boiling
- Unique “Maxi-load” shape moldboard minimizes tractor drag
- Replaceable, heat-treated scarifier teeth and replaceable side-wear plates available (on some models)
- Reversible/replaceable high-carbon cutting edges

65LB	65HB	72LB	72HB	76LB	76HB	80LB	80HB	84HB
40–80 hp								
Cat 1 and 2								
65"		72"		76"		80"		84"
19.313"	24.5"	19.313"	24.5"	19.313"	24.5"	19.313"	24.5"	
925 lbs	1,020 lbs	1,002 lbs	1,100 lbs	1,040 lbs	1,140 lbs	1,075 lbs	1,170 lbs	1,200 lbs
39.5"								
20.8 cu ft	23.2 cu ft	23.0 cu ft	25.7 cu ft	24.3 cu ft	27.3 cu ft	25.7 cu ft	28.6 cu ft	30.0 cu ft
.5"								
no								
2								
.5" x 6"								
6		8						
yes								
Heavy-duty								

# WOODS

## Grading Scrapers

Grading Scrapers



**Ideal for jobs like leveling potholes in gravel driveways or smoothing soil berms after installing field tile.**

- Heavy-duty mast plate creates more down force for smoother surface and virtually eliminates washboard effect
- Adjustable skid shoes and scarifiers increase performance
- Tall side frames hold more material for leveling
- Approachable leading edges and structural reinforcements keep scraper stronger for longer
- Reversible/replaceable high-carbon cutting edges

### Standard-duty

Tractor HP range: 15–45 hp

#### Models

<b>GSS54/GSS54P</b>	53-inch
<b>GSS60/GSS60P</b>	59-inch
<b>GSS72/GSS72P</b>	71-inch

- Three-point hitch: Limited Cat 1 and 1
- Fourteen- and sixteen-inch box height
- Faster, easier and safer hook-ups with ASABE Quick-Hitch compatibility

### Medium-duty

Tractor HP range: 30–65 hp

#### Models

<b>GSM84/GSM84P</b>	83-inch
<b>GSM96/GSM84P</b>	95-inch

- Three-point hitch: Cat 1 and 2
- Sixteen-inch box height — one of the tallest in the industry
- Faster, easier and safer hook-ups with ASABE Quick-Hitch compatibility



**All models available without scarifiers when deep tillage is unnecessary. Grading scrapers without scarifiers have no shank pockets.**




**Heavy Mast Plate**

Solid mast plate provides increased weight for greater down force and constant ground contact

**Reinforced Back**

Reinforcement bar maintains strength and handles heavier material without compromising structure

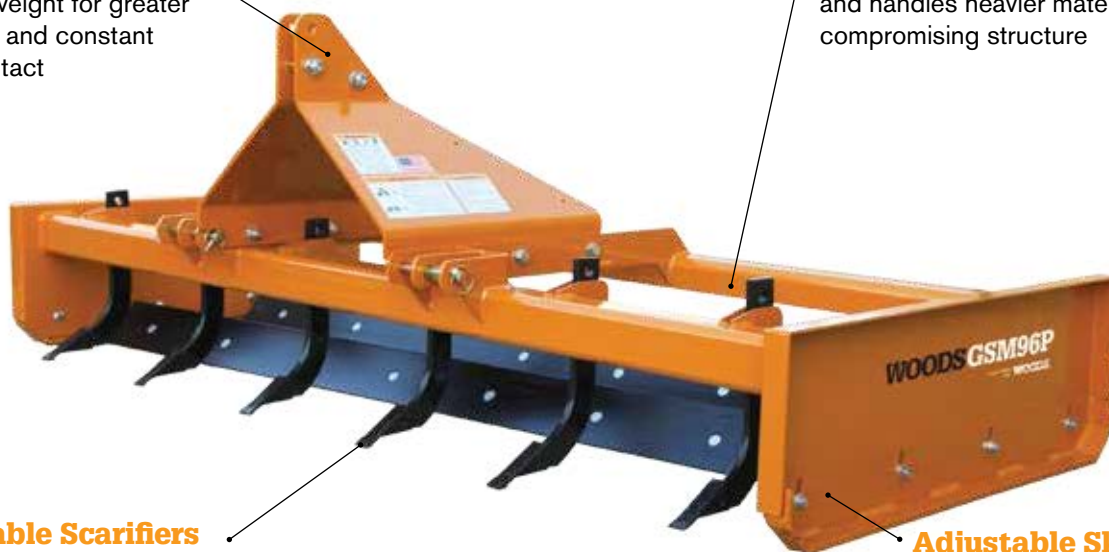**Replaceable Scarifiers**

Replaceable scarifiers with hardened points increases durability and versatility

**Adjustable Skid Shoe**

Replaceable, heavy skids wear longer. Outside adjustment allows for quick changes

Specifications	GSS54/ GSS54P	GSS60/ GSS60P	GSS72/ GSS72P	GSM84/ GSM84P	GSM96/ GSM96P
<b>Tractor Engine HP</b>	15–30 hp	20–45 hp		30–65 hp	
<b>Tractor Hitch</b>	Limited Cat 1 and 1	Cat 1		Cat 1 and 2	
<b>Working Width</b>	53"	59"	71"	83"	95"
<b>Overall Width</b>	58"	64"	76"	88"	100"
<b>Overall Length</b>	42"	46"			
<b>Box Height</b>	14"	16"			
<b>Weight without Scarifiers</b>	349 lbs	493 lbs	580 lbs	664 lbs	712 lbs
<b>Weight with Scarifiers*</b>	409 lbs	553 lbs	655 lbs	752 lbs	802 lbs
<b>Number of Scarifiers*</b>	4		5	6	6
<b>Scarifier Adjustments*</b>	-4.0, -2.5, -1.0, +1.0		-2.5, -1.0, +0.5, +2.5		
<b>Reversible Cutting Edge</b>	.5" x 6"				
<b>Skid Shoe Adjustments</b>	-0.75 to +0.75		-1.0 to +0.5		
<b>Lower Hitch Design</b>	clevis				
<b>ASABE Quick-Hitch Compatible</b>	yes				
	Standard-duty			Medium-duty	

\*Premium models only: GSS54P, GSS60P, GSS72P, GSM84P and GSM96P

# WOODS

## Rear Blades

Rear Blades



### Standard-duty

Tractor HP range: up to 45 hp

#### Models

<b>RBS54</b>	54-inch
<b>RBS60</b>	60-inch
<b>RBS72</b>	72-inch

#### Models

<b>RBS60P</b>	60-inch
<b>RBS72P</b>	72-inch
<b>RBS84P</b>	84-inch

**Ideal for grading dirt or gravel, cleaning up construction sites and moving snow.**

- Formed moldboard made from high-strength steel provides exceptional rigidity and pivots 360°
- Reversible, bolt-on cutting edge adds to product life and enables easy replacement
- Tilt and offset functions for advanced grading applications (premium models)
- Fast, easy, and safe hook-ups with ASABE Quick-Hitch compatibility
- Optional skid shoes for depth control, optional parking stand for easier attachment, and optional end plates (premium models) for moving more material

## Medium-duty

Tractor HP range: 30–75 hp

### Models

<b>HBL72-2</b>	71-inch
<b>HBL84-2</b>	83-inch
<b>HBL96-2</b>	95-inch

- Three-point hitch: Cat 1 and 2
- Five forward and five backfill angles, plus six offset positions
- Reversible/replaceable high-carbon cutting edge
- Convenient parking stand



## Heavy-duty

Tractor HP range: 50–100 hp

### Models

<b>RB750</b>	83-inch
<b>RB850</b>	95-inch

- Three-point hitch: Cat 2 and 3
- Seventeen-inch high, reinforced moldboard
- Optional end plates, skid shoes, and tailwheel
- Convenient parking stand

Tractor HP range: 80–150 hp

### Models

<b>RB990</b>	107-inch
<b>RB1010</b>	119-inch

- Three-point hitch: Cat 2 and 3
- Available as fully hydraulic, fully manual, or combination cylinder options
- Fully hydraulic models allow precise blade and material control (angle, tilt, and offset)
- Tough, dozer-type full box construction
- Eighteen-inch high, reinforced mold-board for maximum material loading
- Optional tailwheel
- Convenient parking stand

# WOODS

## Rear Blades




Rear Blades

Specifications	RBS54	RBS60	RBS72	RBS60P	RBS72P	RBS84P
<b>Tractor Engine HP</b>	up to 30 hp			20-45 hp		
<b>Tractor Hitch</b>	Limited Cat 1 and 1			Cat 1		
<b>Working Width</b>	54"	60"	72"	60"	72"	84"
<b>Moldboard Height</b>	12"			15"		
<b>Moldboard Thickness</b>	3/16" (grade 80 steel)			1/4" (grade 80 steel)		
<b>Approximate Weight</b>	182 lbs	262 lbs	283 lbs	304 lbs		
<b>Reversible Cutting Edge Dimensions</b>	3/8" x 6"			1/2" x 6"		
<b>Pivot Angle</b>	Forward - 5 @ 15°, Reverse - 5 @ 15°					
<b>Tilt</b>	—	—	—	up to 15°		
<b>Offset</b>	—	—	—	up to 12" left or right		
<b>End Plates</b>	—	—	—	optional		
<b>Skid Shoes</b>	optional					
<b>Tailwheel</b>	—	—	—	—		
<b>ASABE Quick-Hitch Compatible</b>	yes					
<b>Parking Stand</b>	optional					
	Standard-duty					



HBL72-2		HBL84-2		RB990		RB1010	
30—75 hp		50—100 hp		80—150 hp			
Cat 1 and 2		Cat 2 and 3					
71"	83"	95"	83"	95"	107"	119"	
18"		17"		18"			
.313"				.25"			
530 lbs	565 lbs	600 lbs	1193 lbs	1233 lbs	1,483 lbs	1,535 lbs	
360°, 5 forward and 5 reverse		360°, 9 forward and 5 reverse		360°, hydraulic			
0°, 15°, 30°		up to 30°		up to 28°			
4", 10" or 16" left or right		up to 24" left or right		up to 33" left or right			
optional				-		-	
optional				-		-	
		optional					
		yes					
		standard					
Medium-duty				Heavy-duty			

## Landscape Rakes

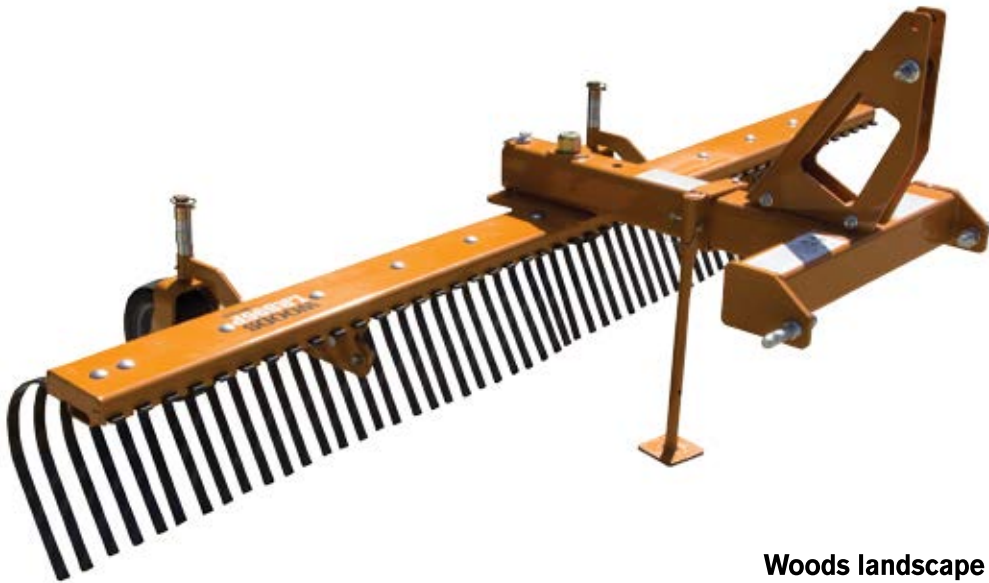

Woods landscape rakes are built with rugged durability for tough clean-up jobs, as well as fine raking features for light-duty lawn care and general maintenance.

### Standard-duty

Tractor HP range: up to 45 hp

Model		Model	
<b>LRS52</b>	52-inch	<b>LRS72P</b>	72-inch
<b>LRS60</b>	60-inch	<b>LRS84P</b>	84-inch
<b>LRS72</b>	72-inch	<b>LRS96P</b>	96-inch

- Heavy pivot components increase product longevity
- Large, structural tine beam channel holds alloy spring steel tines firmly
- Fast, easy and safe hook-ups with ASABE Quick-Hitch compatibility
- Optional gauge wheels allow better depth control and optional parking stand for easier attachment

- High-strength, box-type beams and spring-steel tines handle rocks, dirt, and sand
- Adjustable angles and 360-degree pivot control flow of material to left, right, or center
- One-inch tine spacing provides superior material collection for a smooth, even grade
- Optional dual-gauge wheels for depth control



Specifications	LRS52	LRS60	LRS72	LRS72P	LRS84P	LRS96P
<b>Tractor Engine HP</b>	up to 30 hp			20–45 hp		
<b>Tractor Hitch</b>	Limited Cat 1 and Cat 1			Cat 1		
<b>Working Width</b>	52"	60"	72"	72"	84"	96"
<b>Approximate Weight</b>	156 lbs	168 lbs	186 lbs	264 lbs	288 lbs	311 lbs
<b>Pivot Angle</b>	Forward - 5 @ 15°, Reverse - 5 @ 15°					
<b>Tine Dimensions</b>	- 5 @ 15°, Reverse - 5 @ 15° Tines Dimensions (inches) 5/16" x 1"					
<b>Tine Spacing</b>	1"					
<b>Gauge Wheels</b>	optional					
<b>ASABE Quick-Hitch Compatible</b>	yes					
<b>Parking Stand</b>	optional					
	Standard-duty			Standard-duty (Premium)		

# WOODS

## Cultipackers

**Woods' new cultipacker is a high quality seed bed tool backed by our reputation for made-in-the-USA durability and reliability.**

- Attaches to ATVs, UTVs and tractors up to 75 hp
- Notched, cast-iron cultipacker wheels provide the perfect seed-to-soil contact to trap moisture for higher germination rates
- Flip-over hitch easily changes from towing to working the dirt
- Rugged frame and axle are designed for durability
- Greasable, triple-sealed bearings are easy to maintain and extend work life
- Tow tires and weight rack are standard on C48T model
- Parking stand is standard on C72 and C84 models; add optional tow kit and mud scrapers for greater versatility and productivity







Tractor HP range: 20—75 hp

**Models**

- C48T** 48-inch
- C72** 72-inch
- C84** 84-inch

Specifications	C48T	C72	C84
<b>Tractor Engine HP</b>	up to 30 hp	20-75 hp	
<b>Hitch Type</b>	pull-type	3-pt	
<b>Hitch Category</b>	2" ball	Cat 1 & 2	
<b>Working Width</b>	48"	72"	84"
<b>Overall Width</b>	67"	82"	94"
<b>Length</b>	58" (with tongue)	15.75" (3-pt hitch); 91.5" (with tongue)	
<b>Weight / Shipping Weight</b>	275 lbs / 289 lbs	371 lbs / 390 lbs	420 lbs / 439 lbs
<b>Cultipacker Wheel Quantity</b>	21	32	37
<b>Transport Tires (pneumatic)</b>	standard (10" x 3.25")	optional (10" x 3.25")	
<b>Weight Rack</b>	standard	n/a	
<b>Parking Stand</b>	n/a	standard	
<b>Mud Scrapers</b>	n/a	optional	

## Food Plot Seeders

### Standard-duty

Tractor HP range: 25—45 hp

#### Models

**FPS48** 49-inch  
**FPS60** 60-inch

### Medium-duty

Tractor HP range: 30—85 hp

#### Models

**FPS72** 72-inch  
**FPS84** 84-inch

**Plant up to three types of seed in one pass. Ideal for hunters and small acreage farmers seeding legumes and larger seeds.**

- Three seed box choices — one cool season and two legume — can plant a variety of seeds like alfalfa, clover, corn, sorghum, soybeans, turnips and wheat
- A trailing cultipacker firms the seed bed for perfect seed-to-soil contact that's ready to trap moisture for germination
- Plant cool season seeds, in rows, at a deeper depth while evenly broadcasting up to two types of legume seeds at a shallow depth — all in one pass

Specifications	FPS48	FPS60	FPS72	FPS84
<b>Tractor Engine HP</b>	25–40 hp	30–45 hp	30–75 hp	35–85 hp
<b>Tractor Hitch</b>	Cat 1 & 2			
<b>Working Width</b>	49"	60"	72"	84"
<b>Weight — Standard Configuration*</b>	821 lbs	899 lbs	1,196 lbs	1,320 lbs
<b>Weight — Fully Configured**</b>	1,084 lbs	1,222 lbs	1,578 lbs	1,762 lbs
<b>Number of Seed Boxes Available</b>	3			
<b>Seed Box Ratio</b>	1-speed			
<b>Seed Cups (7" spacing)</b>	7	8	10	12
<b>Row Units</b>	Standard			
<b>Cool Season Seed Box Capacity (bushel)</b>	4.00	5.00	6.00	7.00
<b>Legume Seed Box Capacity (bushel)</b>	1.00	1.25	1.50	1.75
<b>Disc Blades</b>	(8) 16" notched		(10) 18" notched	
<b>Cast Iron or Nylon Trailing Cultipacker</b>	Optional (9.5" diameter cast iron or 11" diameter nylon)			
<b>Calibration Tray &amp; Crank Handle</b>	Standard			
<b>Mud Scrapers &amp; Frame Platform</b>	Optional			
<b>ASABE Quick-Hitch Compatible</b>	yes			
	Standard-duty		Medium-duty	

\* Includes spiked drive roller, disc blades, cool season seed box, and row units.

\*\* Includes cultipacker drive roller, disc blades, cool season seed box, row units, 1st and 2nd legume seed boxes, and nylon trailing cultipacker.

# Precision Super Seeders

Versatile and flexible to easily handle primary seeding, over-seeding, and applications such as native grasses and food plots.

- Three seed box options — cool season, warm season, and legume — let you plant anything from rye and oats to prairie grasses, wild flowers, radishes and soybeans
- Efficient, one-pass planting of up to two seed types at one depth and legume seeds at a different depth with models equipped with three seed boxes
- All seed boxes can be engaged and disengaged independently with a single lynch pin — no tools required



## Standard-duty

Tractor HP range: 25—45 hp

### Models

**PSS48** 49-inch  
**PSS60** 60-inch

## Medium-duty

Tractor HP range: 30—85 hp

### Models

**PSS72** 72-inch  
**PSS84** 84-inch

Specifications	PSS48	PSS60	PSS72	PSS84
<b>Tractor Engine HP</b>	25–40 hp	30–45 hp	30–75 hp	35–85 hp
<b>Tractor Hitch</b>	Cat 1 & 2			
<b>Working Width</b>	49"	60"	72"	84"
<b>Weight — Standard Configuration*</b>	779 lbs	861 lbs	1,132 lbs	1,249 lbs
<b>Weight — Hunting Edition Configuration**</b>	1,044 lbs	1,222 lbs	1,565 lbs	1,761 lbs
<b>Number of Seed Boxes Available</b>	3			
<b>Seed Metering</b>	Fluted and Picker Wheel			
<b>Seed Cups (7" spacing)</b>	7	8	10	12
<b>Cool Season Seed Box Capacity (bushel)</b>	4.00	5.00	6.00	7.00
<b>Native Warm Season Seed Box Capacity (bushel)</b>	5.00	6.25	7.50	8.75
<b>Legume Seed Box Capacity (bushel)</b>	1.00	1.25	1.50	1.75
<b>Front Roller Spikes</b>	(128) .5" x 2" carbide steel	(160) .5" x 2" carbide steel	(192) .5" x 2" carbide steel	(224) .5" x 2" carbide steel
<b>ASABE Quick-Hitch Compatible</b>	yes			
	Standard-duty		Medium-duty	

\* Standard configuration consists of frame with spiked drive roller, adjustable front spiked rollers and cool season seed box

\*\* Hunting Edition configuration consists of frame with spiked, ground drive roller, adjustable front disc blades, cool season seed box, legume seed box and cast iron cultipacker

# WOODS

## Disc Harrows



Specifications	DHS48	DHS64	DHS80		
<b>Tractor Engine HP</b>	up to 35 hp	25-45 hp	35-55 hp		
<b>Tractor Hitch</b>	Cat 1, Lim. Cat 1, Cat 0 optional	Cat 1		Cat 1 and 2	
<b>Width</b>	48"	64"	80"	80"	96"
<b>Average Weight — depending on blade type)</b>	390 lbs	508 lbs	590 lbs	845 lbs	960 lbs
<b>Disc Blade Type</b>	notched	notched; or combination smooth and notched		notched; or combination smooth and notched	
<b>Average Weight per Blade</b>	33 lbs	36 lbs	33 lbs	47 lbs	44 lbs
<b>Disc Diameter / Quantity</b>	16" / 12	18" / 14	18" / 18	20" / 18	20" / 22
<b>Disc Spacing</b>	7.5" front and rear	9" front, 7.5" rear		9" front, 7.5" rear	
<b>Gang Axle Diameter</b>	1" square	1 1/8" square			
<b>Frame Construction</b>	3" x 3" tube and angle		3" x 3" tube and channel	3" x 3" tube	
<b>Quick-Hitch Compatible</b>	Yes				
	Standard-Duty Disc Harrows			Medium-duty Disc Harrows	

**There's nothing like the smell of fresh-turned dirt, especially when you're doing what you love... working the land.**

Whether you're breaking new ground for a garden, or tilling an existing nursery, food plot, vineyard or farm, Woods has the right – the best – disc harrow for your land. You will get years of productive, reliable, dirt-turning work. Built with high-strength U.S. steel, these rugged disc harrows carry Woods' reputation for durability and reliability. Plus, these new discs are easy to use due to innovative design features like individually adjustable disc gangs that reposition with a single pin.

All models feature independent disc gangs that easily angle from 0 to 21 degrees to match your soil type and tilling job



## Standard-duty

Tractor HP range: up to 70 hp

### Models

**DHS48** 48-inch  
**DHS64** 64-inch  
**DHS80** 80-inch

- Mud scrapers that prevent clogging, increase productivity
- Furrow fillers (DHS64, DHS80)

## Medium-duty

Tractor HP range: up to 70 hp

### Models

**DHM80** 80-inch  
**DHM96** 96-inch

- Furrow fillers to reduce end ridges
- Rear drawbar for towing equipment
- Mud scrapers that prevent clogging, increase productivity

## Heavy-duty

Tractor HP range: 50 – 110 hp

### Models

**DHH108P** 108-inch  
**DHH126P** 126-inch  
**DHH144P** 144-inch

- Advanced offset/tandem blade gangs leave an even finish across entire width – no center ridge
- Extended tongue design allows tight turns without hitting tractor tires
- Simple ratchet jack levels unit from front to back
- Optional rear drawbar for towing equipment
- Optional mud scrapers and furrow fillers to increase productivity

### DHH144T

50-75 hp	60-100 hp	70-110 hp
pull-type, 1.25" pin		
108"	126"	144"
2,525 lbs	2,690 lbs	2,860 lbs
notched; smooth; or combination		
105 lbs	98 lbs	90 lbs
20" or 22" / 24	20" or 22" / 28	20" or 22" / 32
9" front and rear		
1 1/8" square		
4" x 3" tube		
n/a		

### Heavy-duty Disc Harrows

# WOODS

## Rotary Tillers



Woods' line of rotary tillers couples the best design features with outstanding performance for the discerning user. Our TS and TC series tillers will handle all of your landscaping and gardening projects with ease.

- TS and TC models available as either forward or reverse rotation
- On initial pass reverse rotation tillers will often till deeper and faster than forward rotation models
- GHT-series for up to 50 hp, and SGT for up to 70 hp tractors are ideal for commercial applications
- Slip clutch driveline protection is standard on all models
- Skid shoes standard

### Standard-duty

Tractor HP range: 18–30 hp

#### Models

<b>TS44/TSR44</b>	44-inch
<b>TS52/TSR52</b>	52-inch
<b>TS60/TSR60</b>	60-inch

- Three-point hitch: Limited Cat 1 and 1
- Specifically designed for subcompact tractors
- Perfect tool for estate-size properties
- Rugged steel tines can till seven inches into tough ground
- Solid steel rotor shaft

Tractor HP range: 20–45 hp

#### Models

<b>TC60/TCR60</b>	60-inch
<b>TC68/TCR68</b>	68-inch
<b>TC74/TCR74</b>	74-inch

- Three-point hitch: Cat 1
- Specifically designed for compact tractors
- Sturdy rear tailgate evenly distributes dirt — leaves a smooth, flat seed bed
- Strong, cast iron gearbox withstands rugged use
- Solid steel rotor shaft

## Medium-duty

Tractor HP range: 30–50 hp

### Models

**GHT60** 57-inch  
**GHT72** 69-inch

- Three-point hitch: Cat 1
- Rotor shaft guard prevents wrapping on end bearing
- Adjustable, six-position skid shoes control tilling depth
- Heavy-duty gear transmission drives blades for added power and extended life
- Cast iron gearbox housing with beveled gears
- Gears with hardened teeth and splined center in enclosed oil bath
- Tapered roller bearings
- Reinforced A-frame for extended life



### Made in America

Woods products are proudly made in the USA. As part of a global economy, we work with business partners around the world and export our equipment to farmers, ranchers, and contractors in international markets. Since 1946, we've been manufacturing in Oregon, Illinois, and supporting the growth of American jobs.

## Heavy-duty

Tractor HP range: 40–70 hp

### Models

**SGT72** 68-inch  
**SGT80** 76-inch  
**SGT88** 84-inch

- Three-point hitch: Cat 2
- Extra heavy-duty gear transmission drives blades in toughest conditions
- Cast iron housing with beveled gears
- Gears with hardened teeth and splined center in enclosed oil bath
- Twenty-position adjustable skid shoes with replaceable wear plates for easy maintenance
- Guard on rotor shaft prevents wrapping on end bearing
- Reinforced A-frame for extended life

## Rotary Tillers

**Woods offers tillers in forward or reverse rotation in 44" — 74" widths.**

Forward rotation tillers are ideal for moist, wet, rocky, sandy or loose soil conditions.

Reverse rotation tillers work best in non-rocky soil conditions. They deliver a smoother top layer of soil by allowing ground cover to travel over the rotor top first, then incorporating it back into the ground beneath a fresh new layer of dirt. More often than not, users can achieve an exceptional seed bed with fewer passes when using a reverse rotation tiller.

Specifications	TS44/ TSR44	TS52/ TSR52	TS60/ TSR60	TC60/ TCR60	TC68/ TCR68
<b>Tractor PTO HP</b>	18–30 hp			20–45 hp	
<b>Tractor Hitch</b>	Limited Cat 1 and 1			Cat 1	
<b>Working Width</b>	44"	52"	60"	60"	68"
<b>Overall Width</b>	51"	59"	67"	67"	75"
<b>Weight</b>	396 / 404 lbs	426 / 435 lbs	467 / 473 lbs	597 / 604 lbs	634 / 641 lbs
<b>Maximum Tilling Depth</b>	7"			7.5"	
<b>Drive Type</b>	#80 chain				
<b>Number of Tines/ Number of Flanges</b>	20 / 5	24 / 6	28 / 7	42 / 7	48 / 8
<b>Number of Tines per Flange</b>	4 C-type (6 optional)			6 C-type	
<b>Rotor Speed</b>	240 rpm				
<b>Tractor PTO Speed</b>	540 rpm				
<b>PTO Driveline Protection</b>	slip clutch				
<b>Gearbox Housing</b>	cast aluminum			heavy-duty cast iron	
<b>Gearbox Drain Plug</b>	yes				
<b>Convertible Side Shift (right)</b>	7.5"	11.5"	15.5"	19.5"	
<b>Quick-Hitch Compatible</b>	yes				
	Standard-duty				





TC74/ TCR74	GHT60	GHT72	SGT72	SGT80	SGT88
20–45 hp	30–50 hp		40–70 hp		
	Cat 1		Cat 2		
74"	57"	69"	68"	76"	84"
81"	66"	78"	77"	85"	93"
665 / 672 lbs	611 lbs	686 lbs	878 lbs	961 lbs	996 lbs
7.5"	7.25"		8.25"		
#80 chain	gearbox				
54 / 9	28 / 7	36 / 9	36 / 9	40 / 10	44 / 11
6 C-type	4 C-type (6 optional)				
240 rpm	211 rpm		213 rpm		
	540 rpm				
	slip clutch				
	heavy-duty cast iron				
	yes				
22.5"	–	–	–	–	–
yes	no				
	Medium-duty		Heavy-duty		

## Post Hole Diggers



**Heavy-duty welded construction, a rugged gearbox with tapered roller bearings, spring-loaded seals, and forged steel teeth offer the durability you need for big or small jobs — whatever the soil conditions.**

- Use for tree and shrub planting, deck or fence post installation, and many other digging needs
- Range of auger bit diameters meet your unique needs — whether landscaping, farming or municipal use

### Standard-duty

Tractor HP range: 14–35 hp

**Models**

**TPD25**

**TPD35**

- Three-point hitch: Cat 0, Limited 1 and 1
- Choose 6-, 9- or 12-inch diameter augers

### Medium-duty

Tractor HP range: 25–65 hp

**Model**

**TPD65**

- Three-point hitch: Cat 1 and 2
- Choose 6-, 9-, 12-, 14-, 18- or 24-inch diameter augers





**Manual tube**

Owner's manual tube retains manual for quick retrieval.

**Rugged gearbox**

Rugged gearbox with tapered roller bearings protects from debris. Six-year gearbox warranty

**Wide range of auger bits**

Wide range of auger bits provides the best tool for every application

**Ductile iron point and forged steel teeth**

Provides efficient digging time after time



**Heavy-duty**

Tractor HP range: 35–95 hp

**Model TPD95**

- Three-point hitch: Cat 1 and 2
- Shear pin protected shaft extends service life
- Options include parking stand, auger extension, semi-double and double flight augers, and hydraulic down force kit

Augers			
Size-Dia x L		Models	Wgt
6" x 36"	standard-duty	TPD25	24
9" x 36"	standard-duty	TPD25	32
12" x 36"	standard-duty	TPD25	39
6" x 48"	standard-duty	TPD35, TPD65, TPD95	33
9" x 48"	standard-duty	TPD35, TPD65, TPD95	42
12" x 48"	standard-duty	TPD35, TPD65, TPD95	49
18" x 48"	standard-duty	TPD35, TPD65, TPD95	99
6" x 48"	heavy-duty	TPD35, TPD65, TPD95	39
9" x 48"	heavy-duty	TPD35, TPD65, TPD95	48
12" x 48"	heavy-duty	TPD35, TPD65, TPD95	60
18" x 48"	heavy-duty	TPD65, TPD95	118
24" x 48"	heavy-duty	TPD65, TPD95	150
30" x 48"	heavy-duty	TPD95	181
18" x 48"	heavy-duty (tree)	TPD65, TPD95	86
24" x 48"	heavy-duty (tree)	TPD65, TPD95	130

Specifications	TPD25	TPD35	TPD65	TPD95
<b>Tractor PTO HP</b>	14–25 hp	20–35 hp	25–65 hp	35–95 hp
<b>Tractor Hitch</b>	Cat 0, Limited 1 and 1	Cat 1	Cat 1 and 2	
<b>Approximate Weight (without auger)</b>	140 lbs	146 lbs	194 lbs	238 lbs
<b>Drive Type</b>	gearbox			
<b>Tractor PTO Speed</b>	540 rpm			
	Standard-duty		Medium-duty	Heavy-duty

# WOODS

## Chippers



Whether you're creating mulch for the garden or clearing new-growth trees, Woods has the best clean-up tool for you.

- Woods chippers and chipper/shredders are PTO-driven with a three-point hitch mount
- Designed to reduce solid material and debris of up to five-inches in diameter to fine mulch

### Standard-duty

Tractor HP range: up to 35 hp

**Model**  
**TCH4500 Chipper**

- Three-point hitch: Limited Cat 1 and 1
- Chip capacity of up to 4.5-inch diameter branches
- Heavy-duty, seven-gauge chipper housing for long life
- Manual clutch for tractors with electric PTO
- Easy access to two 5-inch by 4-inch by .375-inch chipper blades for clean-out and adjustment
- Optional discharge chute allows debris to be directed into trailer or truck

Tractor HP range: 15–30 hp

**Model**  
**5000 Chipper with Shredder feature**

- Three-point hitch: Cat 1
- Four reversible, heat-treated steel blades mounted at 90-degrees for smooth operation, less vibration and longer blade life
- Balanced 125 lb. rotor turns 2,000 RPMs
- Vegetation shredder with thirty-six serrated, free-swinging knives that chip debris up to one-inch in diameter
- Optional blower with 360-degree discharge chute allows debris to be directed into trailer or truck

## Medium-duty

Tractor HP range: 25–60 hp

### Models

**8000 Chipper**

**8100 Chipper**

- Three-point hitch: Cat 1 and 2
- Chip capacity of up to 8-inch diameter branches with 8000 model and 9-inch diameter with 8100 model
- Triple banded belt drive for better transfer of power
- Balanced 1.25-inch by 30-inch, 275 lb. chipping disc
- Four reversible, heat-treated steel with chrome content chipper blades, mounted at 90-degrees for smooth operation, less vibration and longer blade life
- Easy access to blades for clean-out and adjustment
- Standard electronic feed control sensor on 8100 model maintains optimal engine RPM for chipping different diameter material
- 360-degree rotating blower chute with adjustable cap comes standard



Specifications	TCH4500	5000	8000	8100
<b>Tractor PTO HP</b>	up to 35 hp	15–30 hp	25–60 hp	
<b>Tractor Hitch</b>	Limited Cat 1 and 1	Cat 1	Cat 1 and 2	
<b>Chipping Capacity</b>	4.5" diameter	5" diameter	8" diameter	9" diameter
<b>Shredding Capacity</b>	–	1" diameter	–	–
<b>Approximate Weight</b>	392 lbs	450 lbs	885 lbs	1,300 lbs
<b>Feed System</b>	gravity			hydraulic
<b>Feed Rate</b>	–	–	–	0–150 fpm
	Standard-duty		Medium-duty	

# WOODS

## Stump Grinders



**Woods PTO-powered stump grinders are built to perform — reducing tree stumps to mulch in minutes and grinding below ground level.**

- Mount to 3-point hitch and operate from the safety of the tractor seat
- Slip clutch provides protection against abnormally severe shock loads
- Slim design and long reach allow for access to tight places

Tractor HP range: 15–50 hp

**Model TSG50** 20-inch cutting wheel

- Three-point hitch: Cat 1 and 2
- Grind stumps 16 inches above and below ground level
- Twenty-four tough, carbide steel teeth cut bi-directionally

Tractor HP range: 50–100 hp

**Model SG100** 34-inch cutting wheel

- Three-point hitch: Cat 1 and 2
- Cutting wheel is pushed, not pulled, extending life of the bearing and gearbox
- Twenty-five tough, carbide steel teeth cut in one direction

Specifications	TSG50	SG100
<b>Tractor PTO HP</b>	15–50 hp	50–100 hp
<b>Tractor Hitch</b>	Cat 1 and 2	
<b>Cutting Wheel Diameter</b>	20"	34"
<b>Cutting Wheel Speed</b>	1,037 fpm	895 fpm
<b>Cutter Tip Speed</b>	5,428 rpm	7,967 rpm
<b>Weight</b>	545 lbs	1,012 lbs
<b>Hub Torque (lbs / ft)</b>	76–250	450
<b>Horizontal Cut</b>	32"	
<b>Cutting Arc</b>	44°	55°
<b>Max Stump Height</b>	16"	24"
<b>Max Cutting Depth</b>	16"	12"



## Quick Hitch

Woods TQH1 quick hitch makes easy work of changing from one 3 - point attachment to another. When hooking up to many implements, you never have to leave the tractor because lower hooks automatically lock implement into place.

- Heavy-duty steel construction with adjustable top link bracket
- Seven-eighths - inch mounting pins and adapter bushings
- Lower arms lock automatically
- Ensure faster, easier and safer hook-ups with ASABE quick-hitch compatibility



	<b>TQH1</b>
<b>Tractor Hitch</b>	Cat 1
<b>Width</b>	27.25"
<b>Weight</b>	75 lbs
<b>Mounting Pin Diameter</b>	.875"
<b>Adapter Bushing Diameter</b>	1.125"

**POWER TEAM** **Got ideas?**  
Join our customer panel at [woodsequipment.com/power](http://woodsequipment.com/power).  
**You have the power...**

**WOODS®** | A Blount International Brand  
2606 South Illinois Route 2, Oregon, Illinois 61061 tel 800-319-6637 [woodsequipment.com](http://woodsequipment.com)



Warning! Some images may show safety shields removed to provide a better view. Equipment should never be operated with any safety shield removed. Some machines in this brochure may be shown with optional equipment. Always operate machines in accordance with supplied operator's manuals. ©2015 Woods Equipment Company. All rights reserved. WOODS, and the Woods logo are trademarks of Woods Equipment Company. All other trademarks, trade names, or service marks not owned by Woods Equipment Company that appear in this brochure are the property of their respective companies or mark holders. Specifications subject to change without notice.

