



SEEDBED CONDITIONER

Combine a Precision Seedbed Conditioner with a Great Plains Field Cultivator to firm the soil, reduce air pockets, incorporate chemicals, break up surface clods, knock soil off root crowns, and prevent wind and water erosion – all in

one pass. It places the finer particles of soil in the planting zone, allowing perfect seed-to-soil contact to boost crop emergence. All of the Seedbed Conditioner's reel sections overlap for a superior finish with no streaking.



SEEDBED CONDITIONER MODELS

FEATURES & BENEFITS


Seedbed Conditioner	Tillage Width	Transport Width	Transport Height	Engine H.P. Required	Weight
2112SC	12' 11"	14' 3"	N/A	26+	1,701
2115SC	15' 5"	16' 10"	N/A	31+	2,025
2317SC	17' 1"	15'	7' 11"	34+	2,675
2320SC	19' 7"	15'	9' 1"	39+	3,040
2322SC	22' 1"	15'	10' 3"	44+	3,435
2325SC	23' 9"	15'	11' 5"	48+	3,600
2327SC	26' 3"	15'	12' 7"	53+	4,200
2330SC	28' 9"	15'	13' 9"	58+	4,560
2332SC	31' 3"	17' 6"	13' 9"	63+	4,955
2335SC	33' 9"	17' 6"	14' 11"	68+	5,320
2536SC	36' 3"	17' 6"	12' 9"	73+	6,120
2538SC	37' 7"	17' 6"	12' 9"	75+	6,460
2541SC	39' 9"	17' 6"	12' 9"	80+	6,970
2543SC	42' 3"	17' 6"	14'	85+	7,310
2546SC	45'	17' 6"	14'	90+	7,820
2548SC	47' 6"	17' 6"	14'	95+	8,160
2551SC	50'	17' 6"	15' 3"	100+	8,670

Rigid Models

2112SC, 2115SC

3-Section Models

2317SC, 2320SC, 2322SC, 2325SC
2327SC, 2330SC
2332SC, 2335SC

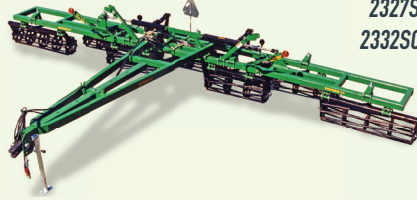


5-Section Models

2536SC, 2538SC, 2541SC, 2543SC
2546SC, 2548SC, 2551SC



HEAVY-DUTY SPRING-CUSHIONED REELS

Heavy-duty 16" diameter reels with 1" rods are designed to stand up to even the largest rocks while busting clods and leaving a perfect seedbed. Spring-cushioning absorbs shock and keeps the reel firmly on the ground.



See www.greatplainsag.com for complete specifications. Specifications are subject to change without prior notification. Images may not depict current or standard production models.

ADDITIONAL STANDARD FEATURES

- Narrow center frames for convenient transport
- Wing sections flex up or down 15°
- Greaseable bearings on reels w/ zerker protectors
- Single hydraulic circuit for lifting and folding
- Replaceable spindle/hub assemblies
- Heavy trussed hitch frame
- ISO hydraulic tips
- Easy-access transport locks
- Heavy-duty hitch jack
- LED safety lighting

ADJUSTABLE REEL WIDTH

The adjustable reel allows the conditioner to be widened by up to 2' to match or exceed the width of the host machine without leaving a streak between reels.

4 x 4 TUBULAR FRAME

Constructed of heavy-duty 4" square tubing, the mainframe of the seedbed conditioner is one of the strongest on the market today. The weight of the frame (up to 150 lbs./ft.) promotes clod and root ball breakage.



TRIPLE-LIP SEALED BEARINGS

Two heavy-duty, triple-lip sealed bearings on every reel reduce time spent on maintenance.



TELESCOPING TONGUE

The length of the tongue adjusts so the seedbed conditioner can be set to track with the lead machine for better field turns.



ADJUSTABLE HITCH HEIGHT

Adjust the height of the hitch to match the tractor or implement's rear hitch height.


OPTIONS (see website for complete list of features & options)



DUAL TIRES (5-SECTION ONLY)



HYDRAULIC WEIGHT TRANSFER

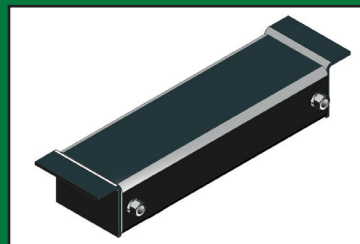

WING WEIGHT PACKAGE



HOSE EXTENSIONS