



8' END WHEEL MIN-TILL

Providing big-drill performance in a smaller machine, the Great Plains 800 End Wheel Drill is the best built end wheel drill on the market. Heavy-duty openers feature hydraulically adjustable down pressure for consistent seed place-

ment along the full width of the unit. Its rugged construction, combined with a superior opener system, make the unit ideal for minimum-till conditions. Openers are in line with the end wheels to reduce sideloading on curves or terraces.



8' END WHEEL MIN-TILL MODEL

8' End Wheel Min-Till	Row Spacing	Working Width	Transport Width	Transport Height	Engine H.P. Required	Weight
800	6", 7.5"	7' 6"	9' 9"	5' 4"	45+	2,379 - 2,579

See www.greatplainsag.com for complete specifications.

Specifications are subject to change without prior notification. Images may not depict current or standard production models.





800

FEATURES & BENEFITS



00 SERIES OPENER

Great Plains 00 Series openers are designed for min-till fluted-feed drills. The 00 opener features 13.5", 4mm blades mounted on 205 triple-lip sealed bearings. The 00 opener has a 1/4" lead opener blade. Hydraulic down pressure is transmitted from the toolbar to the heavy-duty down-pressure spring to apply ample penetration and depth control. A full-length seed tube delivers seed to the bottom of the trench.



CAPABLE
3 BOX 3 SEED 3 RATE
3 3 3

ADDITIONAL STANDARD FEATURES

- 1 1/4" fluted feed cups w/ powdered metal flutes
- Digital acremeter
- 2 bu./ft. seed box
- Walkboard w/ ladder
- Weatherproof lids
- V-bottom dividers
- Seed box level indicator
- Jack stand
- Cylinder kit
- Calibration crank
- 700-15 LT tires
- Safety chain
- LED safety lighting w/ brake signal function module

HYDRAULIC DOWN PRESSURE

A single hydraulic cylinder lifts openers out of the way for transport and end-row turns (inset). The same cylinder also applies down pressure to the 5-position down-pressure adjustment stop. This setting allows the operator to quickly change the amount of down pressure applied to openers.

PRESS WHEEL OPTIONS

Single press wheel choices include a 3"x13" double* or center rib press wheel that creates a crease in the soil for even emergence; a 2"x13" smooth press wheel; or a 3"x13" peak press wheel for arid areas. A 1"x12" double-V press wheel is also offered for 7 1/2" spacing only.



4-SPEED GEARBOX

Changing seed rates is quick and effortless with these permanently lubricated, sealed gearboxes.



END WHEEL DESIGN

Large end wheels maintain accurate seed placement on side hills and uneven terrain. Lockout hubs save drive components from wear.



T-HANDLE DEPTH CONTROL


Provides 18 different positions for accurate depth control in 1/4" increments.

*only available by ordering through Parts

OPTIONS (see website for complete list of features & options)



SMALL SEEDS BOX ATTACHMENT

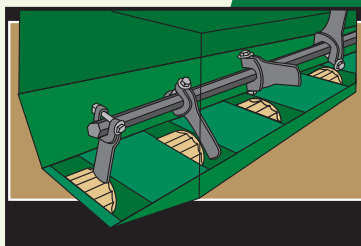

SEED BOX AGITATOR



FERTILIZER BOX



AIR-DESIGN SCRAPERS