

Kidd

FARM MACHINERY



BALE CHOPPERS

Efficient
Versatile
Durable
Affordable



BALE CHOPPERS 806 & 807




Straw for Bedding and Mulching

- Better use of material and labour with less wastage
- Accurate placement of bedding at front of stalls
- Cleaner and healthier bedding and animals
- Increased moisture absorption
- Easier use in liquid slurry systems
- Variable chop length for different Poultry beddings
- Good availability of an economically sourced bedding material
- Straw has no chemical treatments applied to it
- Less waste

Standard Features

- Minimal service and running costs
- Discharge ports on both sides of the machine
- Simple operation from inside the tractor
- Hydraulically driven adjustable rotating tub
- Versatile Quick Hitch A Frame linkage
- Fully trailed version – 806, 807
- Heavy Duty bevel gearbox requires minimised power requirement
- PTO shaft with slip clutch overload protection – 806, 807
- PTO shaft with shearbolt overload protection – 814
- Quality painted finished achieved with a fully shot-blast preparation
- Rear parking stand for stability
- Chain Driven – 806, 807
- Belt driven – 814
- Hydraulic Bale Lift for easy chopping start-up – 806, 807
- Load Bearing Wheels – 806, 807

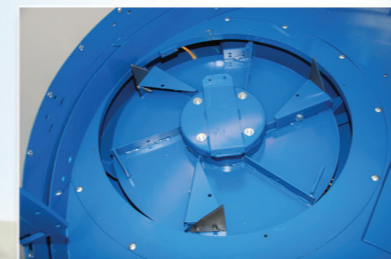

BALE CHOPPER 814



Optional Features

- High Level Discharge Kit – minimum height 3m – 806, 807
- High Level Discharge Kit – minimum height 1.58m – 814
- Mulching chutes for soft fruit and landscaping
- Additional Blade Kit
- Short Chop Kit
- 1:2 Gearbox
- Large Rectangular Bale Kit – 806, 807
- Bedding Chutes
- Swan Neck Chute
- Plastic Pipe Discharge in varying lengths – 806, 807 (1000rpm needed)
- Tub Extension Kit to increase Tub Height – 806, 807
- Chain Drive – 814
- Load Bearing Wheel Kit – 814
- Hydraulic Bale Lift for easy chopping start-up – 814
- PTO shaft with Slip Clutch overload protection – 814



Bedding & Mulching no problem!

Technical specifications

	KD 806 Mounted	KD 806 Trailed	KD 807 Mounted	KD 807 Trailed	KT 814 Mounted
Overall height	1.87 m	1.94 m	1.87 m	1.94 m	1.76 m
Overall length	2.70 m	3.58 m	2.70 m	3.58 m	2.26 m
Overall width	2.03 m	2.03 m	2.22 m	2.22 m	1.70 m
Weight	790 kg	1741 kg	810 kg	1786 kg	730 kg
Discharge height	1.00 m	1.90 m	1.00 m	1.90 m	0.66 – 0.96 m
Tub diameter	1.88 m	1.88 m	2.14 m	2.14 m	1.58 m
Mounting method	3 point linkage (A frame quick hitch)	Fully trailed	3 point linkage (A frame quick hitch)	Fully trailed	3 point linkage (A frame quick hitch)
Capacity	1 round bale - m10 rectangular bales 1 large rectangular bale		1 round bale - m16 rectangular bales 1 large rectangular bale		1 round bale - up to 1.25m diam, 5 small bales
Power requirement at PTO	45 kW / 50 HP		45 kW / 50 HP		40kW/45 HP
PTO input speed	540 rpm/1000 rpm		540 rpm/1000 rpm		540 rpm
Discharge time (approx)	5 -10 minutes		5 -10 minutes		5 -10 minutes
Tyre size	6.00 x 9 x 10	10 x 15.3 x 10	6.00 x 9 x 10	10 x 15.3 x 10	-



Kidd
FARM MACHINERY

Kidd Farm Machinery Ltd
Folly Road · Roundway · Devizes · Wiltshire · SN10 2HT · UK
T: +44 (0) 1380 724910
F: +44 (0) 870 928 9552 E: sales@kiddltd.com

www.kiddltd.com