


The 450 and 850 will throw / blow straw 25 meters (82ft), the 330 20 meters (65ft).



The compact 330 can be mounted or trailed to get in and around smaller buildings. The 330 is still tough enough to handle the biggest of bales!!

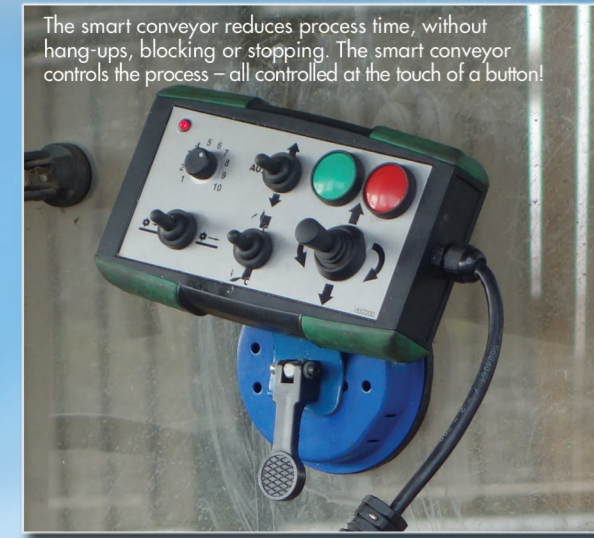

The extending rear door option on the 850 increases capacity to 4 x big round bales or 2 to 4 x big square bales.

## Common Features

- Trailed or mounted. All welded construction, no ledges for material to hang on.
- Swivel chute with 270° of rotation, all electric controls from the tractor cab.
- Rear remote control to tail gate and floor conveyor for easy loading.
- Deep fan, to throw / blow straw, or feed fodder over a barrier or in a feed trough.
- Will handle straw, silage (chopped or baled), hay and haylage, driveline protected by shear bolt, slip & overrun clutch.
- Any shape of round or square bale up to 5ft (1.54M) wide or 3.20 meter (10.40ft) long.

## Technical specifications

| Model           | Capacity           | Width | Height | Length | Beaters | Wheel Track | Wheels  | Brakes | Weight  | Tractor |
|-----------------|--------------------|-------|--------|--------|---------|-------------|---------|--------|---------|---------|
| <b>330 M</b>    | 2.90m <sup>3</sup> | 1.92m | 2.31m  | 3.20m  | 1       | N/A         | N/A     | N/A    | 1630 Kg | 120HP   |
| <b>330 MTC</b>  | 2.90m <sup>3</sup> | 1.92m | 2.31m  | 3.20m  | 1       | N/A         | N/A     | N/A    | 1770 Kg | 120HP   |
| <b>330 T</b>    | 2.90m <sup>3</sup> | 2.07m | 2.54m  | 4.28m  | 1       | 1.85m       | 10/75   | N/A    | 1750 Kg | 60HP    |
| <b>330T TC</b>  | 2.90m <sup>3</sup> | 2.07m | 2.54m  | 4.28m  | 1       | 1.85m       | 10/75   | N/A    | 1890 Kg | 60HP    |
| <b>450 T</b>    | 4.50m <sup>3</sup> | 2.15m | 2.65m  | 4.36m  | 1       | 1.85m       | 10/75   | ○      | 2100 Kg | 75 HP   |
| <b>450 TC</b>   | 4.50m <sup>3</sup> | 2.15m | 2.65m  | 4.36m  | 1       | 1.85m       | 10/75   | ○      | 2200 Kg | 75 HP   |
| <b>475 T</b>    | 4.74m <sup>3</sup> | 2.26m | 3.33m  | 4.35mm | 1       | 1.90m       | 12.5/80 | ○      | 2340 Kg | 95 HP   |
| <b>475 T TC</b> | 4.74m <sup>3</sup> | 2.26m | 3.33m  | 4.35m  | 1       | 1.90m       | 12.5/80 | ○      | 2440 Kg | 95 HP   |
| <b>850 T</b>    | 8.5m <sup>3</sup>  | 2.25m | 2.65m  | 5.96m  | 2       | 1.90m       | 12/75   | Std    | 3000 Kg | 90 HP   |
| <b>850 T EX</b> | 8.5m <sup>3</sup>  | 2.25m | 2.65m  | 5.96m  | 2       | 1.90m       | 12/75   | Std    | 3100 Kg | 90 HP   |

○ = optional

Manufactured by

**Kidd**  
FARM MACHINERY

Kidd Farm Machinery Ltd

Folly Road . Roundway . Devizes . Wiltshire . SN10 2HT . UK

Tel: +44 (0)1380 726085 Fax: +44 (0)8709 289552

E: sales@kiddltd.com

[www.kiddltd.com](http://www.kiddltd.com)

**Kidd**  
FARM MACHINERY

# BALE SHREDDERS



Efficient  
Versatile  
Durable  
Manoeuvrable

