

# Rotary Brush Mowers

Brush Wolf



Model 7200



## Heavy Duty Cutters

with standard mulching blades can handle your most demanding cutting jobs, year after year

DESIGNED TO DELIVER

**DURABILITY, DEPENDABILITY AND VALUE**

PERFECTLY SUITED FOR YOUR JOB AND YOUR SKID STEER.

YOUR DEALER CAN HELP YOU SELECT A MODEL THAT'S RIGHT FOR YOU.

Recognized Around the World as the

# The Leader of the Pack



**Just One Pass Through the Bush**

Compare Quality Value and Performance

and you won't consider anything less than a

**BRUSH WOLF**



[www.walcoequipment.com](http://www.walcoequipment.com)

HEAD OFFICE

20 ARTHUR STREET NORTH, ELMIRA, ONTARIO N3B 1Z9

TEL: (519) 669-4025 FAX: (519) 669-1436

ORDER DESK

e-mail: [orders@walcoequipment.com](mailto:orders@walcoequipment.com)

TEL: (519) 669-1401 FAX (519) 669-3499

QUEBEC OFFICE

364 RTE.122 ST.GERMAIN DE GRANTHAM, QUÉBEC J0C

TEL: (819) 395-5115 Fax (819) 395-2624


e-mail: [walcoqc@walcoequipment.com](mailto:walcoqc@walcoequipment.com)

WALCO USA

4469 292<sup>nd</sup> St. E. Box 57 Randolph MN 55065


Tel: (507) 663-9090 Fax (507) 663-0999



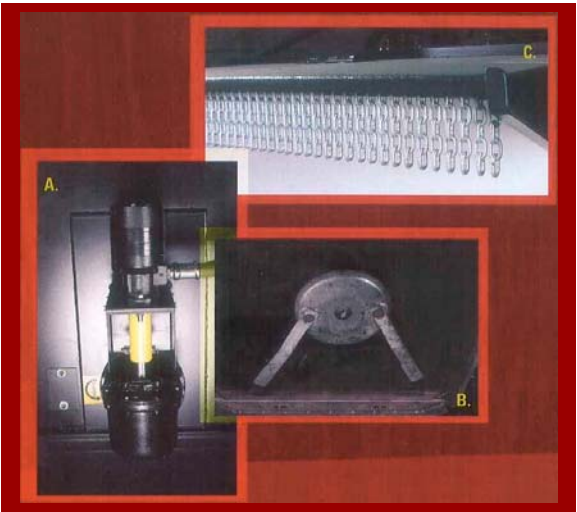

- A.** Every drive line assembly is engineered and precision machined for a positive alignment, and a grade 2 bolt ensures the integrity of the complete drive line, allowing you years of dependable service.
- B.** Our blade carriers are heavy duty, balanced and are of the highest quality, to give you the strength and durability that makes Brush Wolf "A cut above the competition."
- C.** For maximum strength and durability up front, our 1/4" slotted angle chain carrier is welded solid, and holds our 5/16" galvanized chain.

## BRUSH WOLF FEATURES

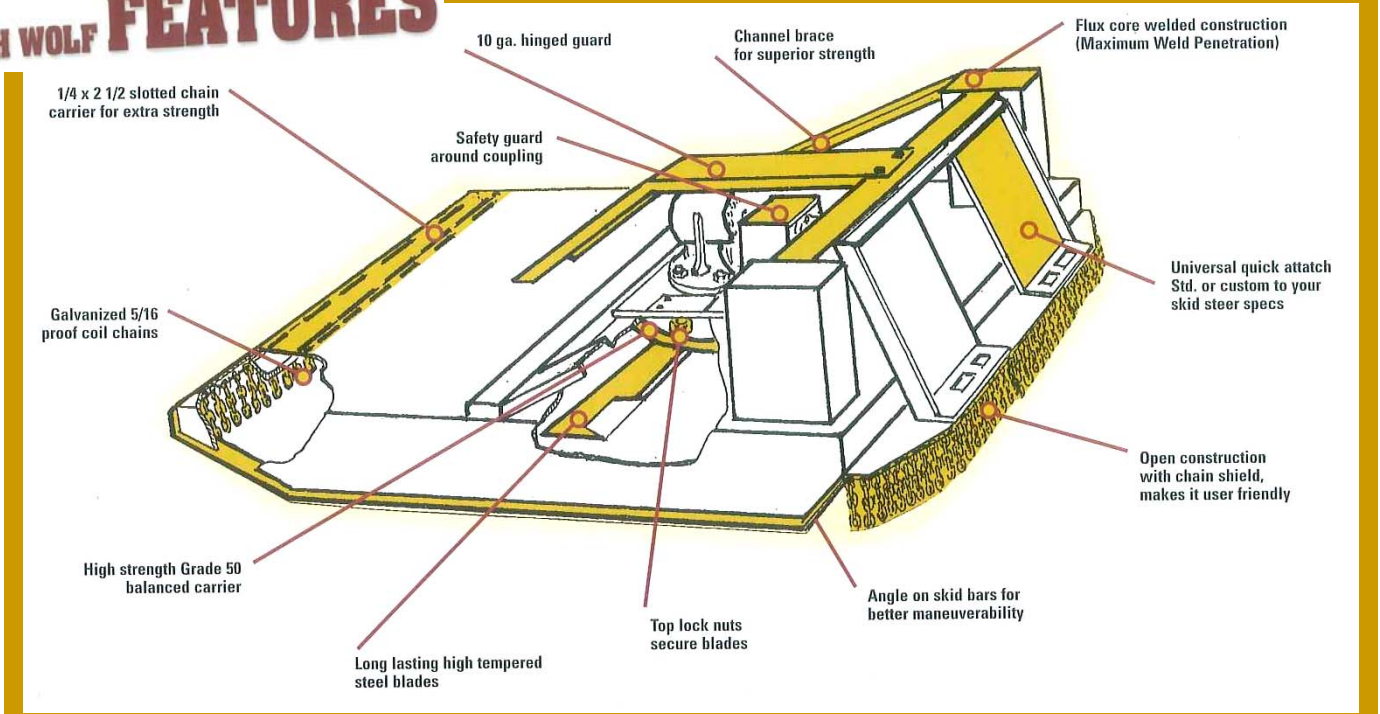

# BRUSH CUTTER SPECIFICATIONS

MODEL	4000 LF LOW FLOW	4000	6000 LF LOW FLOW	6000	6000 HF HIGH FLOW	66000	6600 HF HIGH FLOW
OVERALL WIDTH	50"	50"	62"	62"	62"	68"	68"
OVERALL LENGTH	61"	61"	73"	73"	73"	79"	79"
BLADE CARRIER TYPE	BAR	BAR	HI STRENGTH GR50 PAN	HI STRENGTH GR50 PAN	HI STRENGTH GR50 PAN	HI STRENGTH GR50 PAN	HI STRENGTH GR50
BLADES	1/2" X 4"	1/2" X 4"	1/2" X 4"	1/2" X 4"	1/2" X 4"	1/2" X 4"	1/2" X 4"
BLADE ROTATION	CCW	CCW	CCW	CCW	CCW	CCW	CCW
CUTTING CAPACITY MAX	2"	3"	2"	3"	4"	3"	4"
DRIVE PROTECTION	GR2 BOLT	GR2 BOLT	GR2 BOLT	GR2 BOLT	GR2 BOLT	GR2 BOLT	GR2 BOLT
MOTOR/GEARBOX COUPLER	MACHINED STEEL	MACHINED STEEL	MACHINED STEEL	MACHINED STEEL	MACHINED STEEL	MACHINED STEEL	MACHINED STEEL
MOTOR PROTECTION	CUSHION BLOCK	CUSHION BLOCK	CUSHION BLOCK	CUSHION BLOCK	CUSHION BLOCK	CUSHION BLOCK	CUSHION BLOCK
DECK THICKNESS	7 GA.	7 GA.	1/4"	1/4"	1/4"	1/4"	1/4"
NYLON HOSE SLEEVES	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD
FLAT FAC COUPLER	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD
GEARBOX SEAL GUARD	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD
REQUIRED GPM	8 - 25	13 - 30	10 - 25	15 - 30	30 - 40	15 - 30	30 - 40
WEIGHT / LBS.	569	599	910	940	965	1020	1046
PSI MIN. / MAX.	2500 / 3500	2500 / 3500	2500 / 3500	2500 / 3500	2500 / 3500	2500 / 3500	2500 / 3500

MODEL	7200	72000 HF HIGH FLOW	7800	7800 HF HIGH FLOW	9000	9000 HF HIGH FLOW
OVERALL WIDTH	74"	74"	80"	80"	93.5"	93.5"
OVERALL LENGTH	85"	85"	91"	91"	62"	62"
BLADE CARRIER TYPE	HI STRENGTH GR50 PAN	HI STRENGTH GR50 PAN	HI STRENGTH GR50 PAN	HI STRENGTH GR50 PAN	1" THICK DISC	1" THICK DISC
BLADES	1/2" X 4"	1/2" X 4"	1/2" X 4"	1/2" X 4"	1/2" X 4"	1/2" X 4"
BLADE ROTATION	CCW	CCW	CCW	CCW	SYNCHRONIZED	SYNCHRONIZED
CUTTING CAPACITY MAX	3"	4"	3"	4"	3"	3"
DRIVE PROTECTION	GR2 BOLT	GR2 BOLT	GR2 BOLT	GR2 BOLT	GR2 BOLT	GR2 BOLT
MOTOR/GEARBOX COUPLER	MACHINED STEEL	MACHINED STEEL	MACHINED STEEL	MACHINED STEEL	MACHINED STEEL	MACHINED STEEL
MOTOR PROTECTION	CUSHION BLOCK	CUSHION BLOCK	CUSHION BLOCK	CUSHION BLOCK	BY-PASS	BY-PASS
DECK THICKNESS	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"
NYLON HOSE SLEEVES	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD
FLAT FAC COUPLER	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD
GEARBOX SEAL GUARD	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD
REQUIRED GPM	15 - 30	30 - 40	15 - 30	30 - 40	15 - 30	30 - 40
WEIGHT / LBS.	1094	1120	1145	1175	1235	1260
PSI MIN. / MAX.	2500 / 3500	2500 / 3500	2500 / 3500	2500 / 3500	2500 / 3500	2500 / 3500

## PERFORMANCE DATA

BLADE TIP SPEED/FEET PER MINUTE

MODEL	MINIMUM	MAXIMUM
4800 LF	9,142 @ 8 GPM	28,665 @ 25 GPM
4800	9,089 @ 13GPM	26,006 @ 30 GPM
6000 LF	11,474 @ 10 GPM	35,717 @ 25 GPM
6000	13,109 @ 15 GPM	17,835 @ 30 GPM
6000 HF	13,345 @ 30 GPM	17,803 @ 40 GPM
6600	10,228 @ 15 GPM	20,268 @ 30 GPM
6600 HF	14,784 @ 30 GPM	19,561 @ 40 GPM
7200	11,158 @ 15 GPM	22,090 @ 30 GPM
7200 HF	16,128 @ 30 GPM	21,319 @ 40 GPM
7800	12,088 @ 15 GPM	23,970 @ 30 GPM
7800 HF	17,472 @ 30 GPM	23,133 @ 40 GPM
900	13,099 @ 22 GPM	17,871 @ 30 GPM
9000 HF	12,915 @ 30GPM	17,216 @ 40 GPM

Compare quality  
value and  
performance  
and you won't  
consider  
anything less than  
a BRUSH WOLF



WARRANTY  
3 YEAR ON HYDRAULIC MOTOR  
1 YEAR ON MANUFACTURED



www.walcoequipment.com

HEAD OFFICE 20 ARTHUR STREET NORTH, ELMIRA, ONTARIO N3B 1Z9  
TEL: (519) 669-4025 FAX: (519) 669-1436  
ORDER DESK e-mail: [orders@walcoequipment.com](mailto:orders@walcoequipment.com)  
TEL: (519) 669-1401 FAX (519) 669-3499  
QUEBEC OFFICE 364 RTE.122 ST.GERMAIN DE GRANTHAM, QUÉBEC J0C  
TEL: (819) 395-5115 Fax (819) 395-2624  
e-mail: [walcoqc@walcoequipment.com](mailto:walcoqc@walcoequipment.com)  
WALCO USA 4469 292<sup>nd</sup> St. E. Box 57 Randolph MN 55065  
Tel: (507) 663-9090 Fax (507) 663-0999



# Rotary Brush Mowers

## Brush Wolf

**"COMPARE VALUE, QUALITY, AND PERFORMANCE...YOU WON'T CONSIDER ANYTHING LESS THAN A BRUSHWOLF"**



**You cannot own a better performing,  
more heavy duty brush cutter!**

The 72-M-AX can handle your most demanding cutting jobs year after year! Hit the hydraulic switch and experience the power and torque of the worlds' most aggressive brush-cutting machine.

After your first pass through the densest brush you will know why Brush Wolf is recognized around the world as the "leader of the pack" and continues to be the #1 selling rotary brush cutter in the United States.

Universal quick attach pick-up plates and State-of-the-art safety features, allow it to be used by anyone, anywhere safely.

If taking down larger trees and eliminating brush, is what you are looking to do, the 72 M-AX by Cross-Tech manufacturing is what you should be looking for.

#### WARRANTY

1 year on direct drive motor and bearing housing.  
2 year on all welded components and manufactured parts.



- ASSEMBLED WEIGHT 1550 LBS
- BEARING HOUSING GUARD STANDARD
- BLADE CARRIER TYPE 1" GRD-50 DISC
- BLADE TYPE (3) 5/8" X 5" A-5150 STEEL
- CUTTING CAPACITY 6"
- DECK STRUCTURE 1/4" A-36 STEEL FORMED
- DECK SUPPORT STRUCTURE 3/8" A-36 STEEL
- DRIVE DIRECT
- FLAT FACE COUPLINGS STANDARD
- GPM MIN - MAX 30 - 40
- HOSE SLEEVES STANDARD
- MOTOR PROTECTION STEEL CUSHION VALVE
- OVERALL LENGTH 82"
- OVERALL WIDTH 74-3/4"
- PSI MIN - MAX 3000 - 4100
- PUSH GUIDE SUPPORT STRUCTURE 3/4" A-36 STEEL
- SAND BLASTED / POWDER COATED STANDARD

**THE WORLD'S MOST EXTREME BRUSH CUTTING MACHINE**



[www.walcoequipment.com](http://www.walcoequipment.com)

HEAD OFFICE

ORDER DESK

QUEBEC OFFICE

WALCO USA

20 ARTHUR STREET NORTH, ELMIRA, ONTARIO N3B 1Z9

TEL: (519) 669-4025 FAX: (519) 669-1436

e-mail: [orders@walcoequipment.com](mailto:orders@walcoequipment.com)

TEL: (519) 669-1401 FAX (519) 669-3499

364 RTE. 122 ST. GERMAIN DE GRANTHAM, QUÉBEC JOC

TEL: (819) 395-5115 Fax (819) 395-2624

e-mail: [walcoqc@walcoequipment.com](mailto:walcoqc@walcoequipment.com)

4469 292<sup>nd</sup> St. E. Box 57 Randolph MN 55065

Tel: (507) 663-9090 Fax (507) 663-0999