


Unverferth® Tillage

Simple Perfection!

Plain and simple, you'll build the perfect seedbed with the Perfecta® II field cultivator. Save fuel and time by tilling, leveling and finishing in a single pass. It's ideal for row-crop, orchard, vineyard, track and arena grooming and a multitude of other tillage applications.



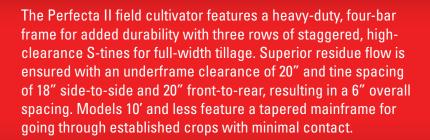

UM

Heavy-duty, four-bar frame with three rows of S-tines for full-width tillage.


Tines can till from 2" to 6" deep and are available in your choice of three styles. The standard S-tine features a 2 3/4" goosefoot shovel for effective soil finishing in previously worked soils. The heavy-duty S-tines with 7" sweeps provide effective penetration in heavier, unworked soils and rocky conditions. Heavy-duty, edge-bent tines feature 7" sweeps for working in the toughest soils for maximum tillage and consistent depth. The two outermost tines have reversible 1 3/8" shovels.


The leveling bar, with choice of straight spiked teeth, or round diagonal teeth, knocks down ridges and breaks clods. The forged, spike teeth provide excellent leveling in low residue, while the diagonal one-bar with heat-treated teeth performs well for moderate leveling and higher-residue fields. Spring downpressure is easily adjustable for varying soil and residue conditions.

Aggressive, Unverferth 12" diameter Rolling Harrow® baskets with serrated, spiraled-edge design complete the job by knocking soil from weed roots and leaving them on the surface to wilt and die. The result is a near-perfect seedbed that leaves the finer soil particles beneath the surface for optimum seed-to-soil contact and coarser materials on top to resist crusting and erosion. Baskets can be reversed when increased firming action is desired.

Rolling Harrow baskets are also ideal for chemical and residue incorporation.










The bedded-crop model of the Perfecta II is the ideal implement for finishing fallow beds. While uprooting arowina weeds to wilt and die, the Perfecta II is also loosening and aerating the soil for optimum seed-tosoil or root-to-soil contact. Models are available for a variety of bed widths.



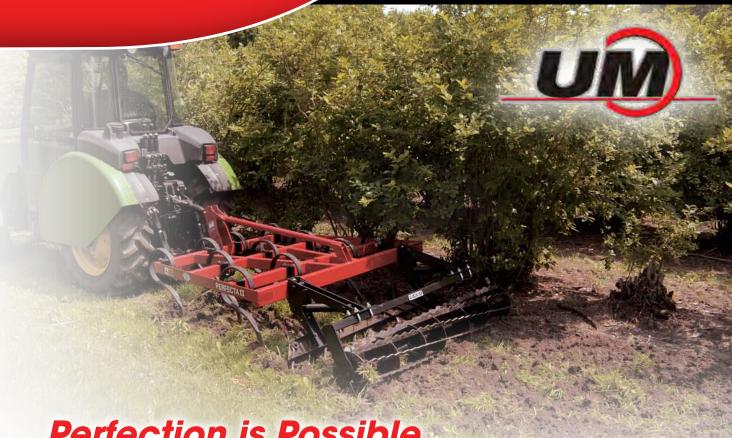

Perfection is Possible

Perfecta II models from 4' through 10' feature tapered sides for close work without injury to trees, shrubs, bushes or vines when working orchards, groves or vineyards.





The Perfecta II field cultivator is lighter, pulls easier, covers more acres and is more versatile than a comparable-sized disk. The horsepower requirement is 4-7 hp per foot. It's available in a variety of configurations, working widths from 4' to 28' and your choice of a durable, high-gloss red or green powdercoat finish.

See your Unverferth dealer today or check our website at umequip.com for complete details on the Perfecta II field cultivators.

Perfecta® II Field Cultivators

> Folding models from 24' to 28' feature lateral trusses for greater strength

Specifications

Folding Perfecta II

Fit Cat. II Standard & Quick Hitches and Cat. III Narrow Quick Hitches

12' Base with Folding Wings

Frame	Working	Folded	Transport		Number of Number			Rollers, Width Number		Number of Leveling	Approx. weignt
Width	Width	Height	Width	Size	Size S-Tines		4'	5'	6'	Bar Teeth	(lbs.)
28'	27' 6"	9' 11"	15'	8'	55	_	4	1	2	56	3,575
26'	25' 6"	9' 1"	15'	7'	51	2	2		2	52	3,375
24'	23' 6"	8' 2"	15'	6'	47	_	1		4	48	3,180
22'	21' 6"	7' 3"	15'	5'	43	_	_	2	2	44	2,825
20'	19' 6"	6' 4"	15'	4'	39	_	2	_	2	40	2,640

9' Base with Folding Wings

Frame	Working	Folded	Transport	Wing Number of		Rollers, Width Number			th	Number of Leveling	Approx. weignt
Width	Width	Height	Width	Size	Size S-Tines		4'	5'	6'	Bar Teeth	(lbs.)
26'	25' 6"	10' 3"	12' 6"	8'	51	-	4	2	_	52	3,350
24'	23' 6"	9' 3"	12' 6"	7'	47	2	2	2	—	48	3,130
22'	21' 6"	8' 2"	12' 6"	6'	41	_	_	2	2	44	2,900
20'	19' 6"	7' 3"	12' 6"	5'	37	_		4	_	40	2,545
18'	17' 6"	6' 4"	12' 6"	4'	33	l	2	2	_	36	2,355

Rigid Perfecta II

10'-20' fit Cat. II Standard & Quick Hitches and Cat. III Narrow Quick; 8' and smaller Cat. I

	Frame	Working	Transport Width	Number of S-Tines	Roller	s, Wic	dth Nu	ımber		Approx. Weight (lbs.)
	Width	Width			3'	4'	5'	6'	Teeth	Approx. Weight (ibs.)
š	20'	19' 6"	20'	39	-		4	_	40	2,310
	18'	17' 6"	20'	35	—		_	3	36	2,214
	15'	14' 6"	15'	29	_	_	3		30	1,673
C	14'	13' 6"	15'	27	-	1	2		28	1,567
	13'	12' 6"	13'	25	_	2	1	_	26	1,391
	12'	11' 6"	13'	23	—	_	_	2	24	1,351
3	10'	9' 6"	10'	19	—	_	2	_	20	1,125
	8'	7' 6"	8'	15	_	2	_	_	16	920
	7'	6' 6"	7'	13	1	1		_	14	870
Z	6'	5' 6"	6'	11	—	_	—	1	12	768
3	5'	4' 6"	5'	9	—	_	1	_	10	564
	4'	3' 6"	4'	7	—	1	_	_	8	531

Specifications

Perfecta II for Bedded Crops

10'–28' fit Cat. II Standard & Quick Hitches and Cat. III Narrow Quick Hitches; 7' and smaller accept Cat. I Standard Hitches and Cat. I Quick Hitches (optional adapter pins required)

	T una sinanci assopt sat. I stanaa						
Bed Width	Description		S-Tines	Shovels		Rolling	Approx.
vviatn	•	Qty.	Size	Qty.	Size	Baskets	Weight (lbs.)
84"		4	30" Adj.	4	10"		3,360
	22' for 3 - 84" Beds - Folding	6	19.5"	6	2.75"	3 - 6 ft.	
		30	16"	30	1"		
		4	30" Adj.	4	10"	1	2,704
80"	22' for 3 - 80" Beds - Folding	6	19.5"	6	2.75"	3 - 6 ft.	
		30	16"	30	1"		
		2	30" Adj.	2	10"	1 - 6 ft.	650
80"	7' for 1 - 80" Bed - Rigid	2	19.5"	2	2.75"		
		9	16"	9	1"		
		6	30" Adj.	6	10"		3,600
66"	28' for 5 - 66" Beds - Folding	20	19.5"	20	2.75"	5 - 4 ft.	
		40	16"	40	1" 10"		
CCII	20' for 3 - 66" Beds - Rigid	4	30" Adj.	4		0.54	2,000
66"		6	19.5"	6	2.75"	3 - 5 ft.	
		24	16"	24	1"	5 - 4 ft.	3,360
		6	30" Adj.	6	10"		
60"	25' for 5 - 60" Beds - Folding	20	19.5"	20	2.75"		
		40	16"	40	1"		
	15' for 3 - 60" Beds - Rigid	4	30" Adj.	4	10"	3 - 4 ft.	1,660
60"		12	19.5"	12	2.75"		
		24	16"	24	1"		
		5	30" Adj.	5	10"	4 - 2 ft.	1,660
40"	15' for 4 - 40" Beds - Rigid	8	19.5"	8	2.75"		
		20	16"	20	1"		
		5	30" Adj.	5	10"		1,660
39"	15' for 4 - 39" Beds - Rigid	8	19.5"	8	2.75"	4 - 3 ft.	
		20	16"	20	1"		
		5	30" Adj.	5	10"		1,660
38"	15' for 4 - 38" Beds - Rigid	8	19.5"	8	2.75"	4 - 3 ft.	
		20	16"	20	1"		
		5	30" Adj.	5	10"		
36"	12' for 4 - 36" Beds - Rigid	8	19.5"	8	2.75"	4 - 3 ft.	1,537
		20	16"	20	1"		
		7	30" Adj.	7	10"	3 - 5 ft.	1,900
30"	15' for 6 - 30" Beds - Rigid	12	19.5"	12	2.75"		
		24	16"	24	1"		

Due to continuing improvements in the design and manufacture of Unverferth products, all specifications contained herein are subject to change without notice.



P.O. Box 357 • Kalida, Ohio 45853 (419) 532-3121 • FAX (419) 532-2468 unverferth.com

1-800-322-6301

Please remind all family members and others to use caution and follow recommended safety practices when around all farm equipment. Unverferth Manufacturing Co., Inc., supports the efforts of Farm Safety 4 Just Kids and all other organizations that promote farm safety.

©2012 Unverferth Manufacturing Co., Inc. Printed in U.S.A.

 $^{\hbox{\scriptsize I}\!\hbox{\scriptsize I}}$ Trademarks, registered or applied for, of Unverferth Manufacturing Co., Inc., Kalida, OH

Additional facilities in California, Georgia, Iowa, Nebraska, North Dakota, Oregon and Canada



