

**Unverferth**® Bulk Seed Handling

*Seed Runner™ self-loading seed tender*



***3-in-1  
seed-handling  
versatility***

*Models 3750 XL, 3750, 2750*



## 3-in-1 seed-handling versatility

The dual-compartment Unverferth Seed Runner™ seed tender not only delivers seed to your planter or drill, its patented design allows the conveyor to rotate 180° for filling itself! You can even position the conveyor parallel to the tender and transfer seed from one container to another. That's 3-way versatility — loading, unloading and transferring — for three times the value.



Seed Runner in transport position

The 18' steel-tube conveyor (21' on model 3750 XL) with 2-stage, 5' telescoping downspout means it's easy to fill the farthest corners of the largest planters and drills, up to 30' away. An optional 3-stage, 10' telescoping downspout increases reach up to 40' for filling 16-row planters!

## Seed Runner 3750 X-tra Long 21' Conveyor



The dual-compartment Unverferth Seed Runner model 3750 XL features an extra-long 8" x 21' conveyor that's equipped with a 2-stage, 6' telescoping downspout for easily reaching the tallest central-fill planters. An optional 3-stage downspout increases reach up to 44'. The conveyor's 12" belt inside the 8" tube allows for the gentlest seed handling possible plus an unloading speed up to 25 bushels per minute!

The conveyor features 60" of hydraulically operated vertical-height adjustment and an adjustable spring-lift assist for easy movement into the loading or transport position.





- Models 3750 XL and 3750 feature a capacity of 375 seed units (300 bushels); the model 2750 holds up to 275 seed units (220 bushels)
- Conveyor features 60" of hydraulically operated vertical-height adjustment for easy movement into the loading or transport positions
- Conveyor tucks into the storage position at either the front or back of the tender
- Conveyor base pivots a full 180° and can be locked into position in ¼" increments, equal to every 10" at conveyor's end
- Pivot track features bolt-on stainless-steel wear plates for added durability
- Loading stand at the bottom of the conveyor allows the hopper to be placed 3'5" off the ground for easier self-filling from bulk-container boxes or bags and provides the ideal loading angle
- Top-mounted, 6-cubic-inch hydraulic motor pulls the conveyor belt forward, keeping it tight for the most efficient seed movement and reduced motor stress
- Conveyor tube-size choice of 8" or 6"; the 8" cupped and cleated belt inside the 6" conveyor moves seed up to 12 bushels per minute; the 12" cupped and cleated belt inside the 8" conveyor tube gently carries seed at speeds up to 25 bushels per minute
- Large, collapsible hopper allows the unit to self-feed the conveyor without spilling over
- Standard, snug-fitting 18-ounce rollover tarp protects contents from weather and stays tightly locked, even at highway speed; optional electric rollover operation





## 3-in-1 seed-handling *versatility*



Fill-level indicator lights



Bottom cleanout



Easy-access control panel



Standard wired remote

- Side-mounted LED lights provide quick verification of load contents
- Retractable ladder and dual viewing windows make checking contents quick and convenient during loading and unloading
- Seed Runner seed tenders come complete with a heavy-duty, powder-coated double- or triple-axle undercarriage, depending on model, or they can be mounted to your own truck or trailer
- Undercarriage features durable steel construction, rubber-cushioned suspension, LED lights, reflectors and transport chains for transport safety and durability
- Easy-opening, dual 5" x 6" doors with a rubber funnel regulates seed flow
- Patented conveyor inlet with brush-type seal prevents seed from back-feeding into the hopper for cleaner operation and the gentlest seed handling
- Hopper features a hinged door at the bottom for easy and complete cleanout
- Standard wired remote with magnetic mount controls conveyor up/down and on/off for convenient storage and easy operation



*Downspout with adjustable deflector*



*Honda engine with electric start*

- Tool-free removal of the downspout and adjustable rubber-cushioned deflector for easy filling
- Steep-sloped box sidewalls ensure fast and complete unloading
- Hookup is easy with the standard 2 5/16" ball hitch or available 3" pintle hitch or clevis hitch
- Trademarked ivory-and-beige finish provides a distinctive look and features high-quality two-part urethane finish with silicone-sealed seams for a long-lasting finish
- Models 3750 and 2750 Seed Runner hydraulics are powered by an 11 hp (340 cc) electric-start Honda gas engine; the 3750 XL is powered by a 13 hp (360 cc) engine

## **Accessories**

### **Scales**

- Optional scale packages can be factory- or field-installed and feature an optional downloader kit for transferring data to your personal computer and an optional printer for instant hard-copy verification
- Model 2410 scale features standard operations and large LCD readout
- Model 2520 scale provides automatic conveyor shutoff for delivering precise quantities of seed time after time
  - Features built-in calculator for determining weight-per-box needed
  - USB drive port for saving seed delivery information and transferring to an office computer
  - Tracks variety and field information and even individual compartment unloading
- Scale monitor is enclosed in a weather-tight box for verifying the quantity of seed delivered or for using as a weigh cart at harvest
- Scale platform is also available for installing scales when using the Seed Runner on your own truck or trailer



*Optional scale*



## Accessories

- Gooseneck hitch for greater hauling ease; features heavy-duty jack for parking and adjustable hitch for easily attaching to truck; options include hydraulic jack and 5th-wheel conversion for pulling by semi-truck tractor
- Spout spotlight for easier nighttime filling
- Tongue-mounted spare tire for quickly changing flats
- Canvas cover for the hopper keeps the intake free of debris
- Electric rollover tarp



Gooseneck hitch



Optional electric rollover tarp




Canvas cover for hopper



Spare tire for reduced downtime



Compact design

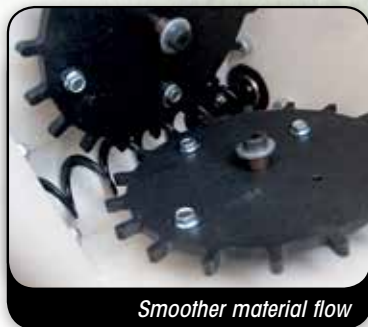

Smoother material flow

## T&G Applicator for ideal planter lubrication

- Patent-pending design for constant application of talc, graphite or a mixture of both for ideal planter lubrication and more consistent seed placement
- Automatically turns on and off in conjunction with conveyor
- Designed for Seed Runner and Seed Pro® bulk seed tender
- 50 lbs. capacity and includes lower cleanout door
- Weather-tight hopper lid keeps contents dry; gas-strut lift assist for easy opening and filling
- Augers material into conveyor inlet and powered by Seed Runner hydraulics
- Auger system and internal agitation provide even coating and virtually eliminates the possibility of material bridging
- T&G Applicator system includes metering control for delivering correct amount



## Wireless remotes — Double your seed-filling speed

With the Unverferth Seed Runner tender's optional handheld wireless remote controls, you can double your filling speed and do two things at once. Position the conveyor to the desired working position and aim the downspout. You can efficiently control operations from anywhere up to 100 feet away.

- Heavy-duty weather- and impact-resistant plastic to withstand the harshest conditions
- Large, labeled switches for easy reading and operation, even with work gloves
- Magnetic attachment provides added storage convenience



7-function handheld wireless remote

## Choice of three wireless remote control packages:



Hydraulic door-opening controls

- **3-function**  
Conveyor on/off; conveyor raise/lower; open/close doors
- **6-function**  
Adds conveyor pivot, engine start/stop with emergency "off" switch, engine throttle control and includes an LCD scale display
- **7-function**  
Adds conveyor rotation into self-loading and loading positions and is available for model 3750 XL Seed Runner seed tender



## Specifications

<b>Unverferth Seed Runner™ Seed Tender</b>			
<b>Model</b>	<b>3750 XL</b>	<b>3750</b>	<b>2750</b>
Overall length (conveyor forward)	27'10", either hitch	24'8" ball hitch/ 25'9" gooseneck hitch	23'8" ball hitch/ 24'8" gooseneck hitch
Transport width	8'6"	8'6"	8'6"
Overall transport and loading height	11'2"	11'2"	10'7"
Box length	14'	14'	12'
Box width	8'6"	8'6"	8'
Box height	9'4"	9'4"	8'8"
Box base length	9'5"	9'5"	9'5"
Box base width	5'	5'	5'
Undercarriage length	21'	21'	18'5"
Transport length	22'9"	22'9"	19'8"
Undercarriage deck height	1'10"	1'10"	1'10"
Underframe clearance	1'2"	1'2"	1'2"
Conveyor height in transport position	8'4"	8'1"	8'1"
Conveyor maximum unloading height	13'6"	12'	12'
Conveyor reach at maximum unloading height	14'2"	11'2"	11'2"
Conveyor minimum unloading height	7'10"	7'	7'
Conveyor reach at minimum unloading height	16'6"	13'5"	13'5"
Approx. empty weight (lbs.)	6,500	6,250	5,900
Tongue weight – loaded (lbs.)	1,000	1,000	1,000
Hitch type (standard/optional)	2 <sup>5</sup> / <sub>16</sub> " ball/3" pintle	2 <sup>5</sup> / <sub>16</sub> " ball/3" pintle	2 <sup>5</sup> / <sub>16</sub> " ball/3" pintle
Lighting connector	7-pin flat	7-pin flat	7-pin flat
Reach w/standard 2-stage downspout	34' (12-row planter)	30' (12-row planter)	30' (12-row planter)
Reach w/optional 3-stage downspout	44' (16-row planter)	40' (16-row planter)	40' (16-row planter)

U.S. Patents #5,888,044, #7,690,499 and #8,221,047. Additional U.S. and foreign patents applied for.

**See your nearest Unverferth dealer today for complete details on the 3-in-1 Unverferth Seed Runner seed tender or visit our website at [www.umequip.com](http://www.umequip.com).**

Due to continuing improvements in the design and manufacture of all Unverferth products, all specifications contained herein are subject to change without notice.

**Unverferth**  
Manufacturing Company, Inc.

P.O. Box 357 • Kalida, Ohio 45853  
(419) 532-3121 • [unverferth.com](http://unverferth.com)

Please remind all family members and others to use caution and follow recommended safety practices when around all farm equipment. Unverferth Manufacturing Co., Inc., supports the efforts of Farm Safety 4 Just Kids and all other organizations that promote farm safety.

©2014 Unverferth Manufacturing Co., Inc. Printed in U.S.A.

®™ Trademarks, registered or applied for, of Unverferth Manufacturing Co., Inc., Kalida, OH.

Additional facilities in California, Georgia, Iowa, Nebraska, North Dakota, Oregon and Canada.



SR41031051M0