



# TIGER-MATE 200 FIELD CULTIVATOR



## JUMP-START YOUR YIELD POTENTIAL

Plants that get off to a fast, uniform start are proven to be more vigorous throughout their life cycle and are in the best position to **maximize their growing potential**. Seed bed conditions at planting are the determining factor for whether or not this great start happens.

**The industry leading Case IH Tiger-Mate 200 field cultivator and Crumbler team up to create a firm, level seed bed.**

- warming the soil for quicker dry-down
- earlier planting allows for a longer growing season
- improved soil tilth allows for better seed-to-soil contact
- allows for faster germination and uniform crop emergence

The Case IH Tiger-Mate 200 and Crumbler are the perfect seed bed preparation team to give you the best chance for a great season.

### Optimum Growing Environment



*It is very important to prepare the proper seed bed to ensure uniform germination and emergence. If your crops emerge late or uneven, you could stand to lose 12% or more yield at the beginning of the growing season.*

Source: NCH36 Carter, Natziger, Hicks




## BUILD THE PERFECT SEED BED

Creating the perfect seed bed is the key to improving your crop's chances at **maximizing yield potential**. With the Case IH Tiger-Mate 200 working for you in the Spring, you can create greater surface soil tilth with proper pore and soil aggregate size and distribution within the seed zone.

### The Tiger-Mate 200 offers:

- positive, mechanical depth control for uniform depth
- walking tandems are standard equipment on the mainframe and each wing section
- stabilizing wheels are standard equipment on each wing section

Through its **Split-the-Middle Sweep (SMS)** pattern and 6 in. (152 mm) shank spacing, the Tiger-Mate 200 **thoroughly mixes residue with the soil** and **incorporates nutrients evenly**, reducing "hot spots" that can burn the roots of young seedlings.

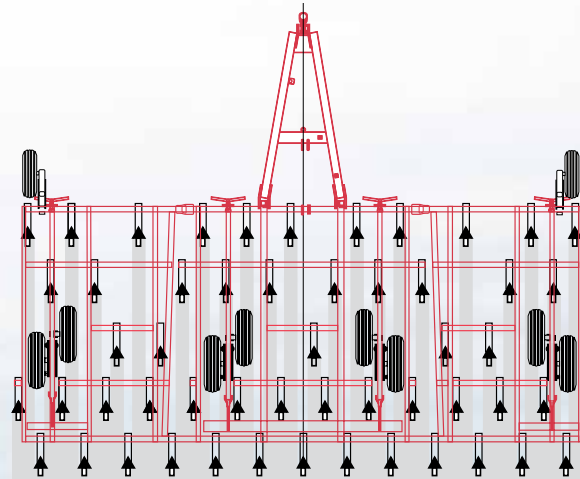

**SPLIT-THE-MIDDLE SWEEP (SMS) PATTERN**

The SMS design also assures even tracking and uniform sweep wear by evenly loading both sides of each sweep, which prepares a level seed bed for uniform emergence. The first three rows of shanks take a full cut through the soil, and the fourth and fifth rows cut out the middles. Soil, residue and chemicals are mixed and spread uniformly across the width of the unit and throughout the entire depth.



**MAXXI-POINT  
SWEEP**

Manufactured from 6.5-mm high-strength Earth Metal alloy steel for increased toughness and longer wear life, the Maxxi-Point™ outperforms competitive sweeps. Featuring heavy-duty extended length nose with a 1/2-inch wide wear point for improved penetration.



**MAXXI-GRIP  
SWEEP**

The new and improved Maxxi-Grip sweep has a low crown for less groove, a long nose for extra long wear and the curved edge makes for a better cutting action. 7 in. (178 mm) and 9 in. (229 mm) sweeps are available.



## ACCEPT NO IMITATIONS

An important key to creating a level seed bed is making sure the cultivator stays at uniform depth. While this may seem obvious, this simple difference is one of the many things that distinguishes the Tiger-Mate 200 from competitive, look-alike models.



The optional one-way pivot allows the stabilizer wheel to pivot when it is on the inside position of a turn to maintain proper depth control and reduce side loads on the wheel and tire. A stop built into the stabilizer wheel prevents the wheel from wobbling when operating in a straight line or on the outside of a turn.



A bridge frame design is used for the ultimate in strength and performance. 5-bar frame utilizes 3 x 4 in. (76 x 102 mm) side-to-side and 2 x 2 in. (51 x 51 mm) front-to-rear tubing. Lap welds are used to increase strength and extend frame life.





The **Coil Tine Harrow** has a 3-bar design and 15 in. (38 cm) rank for excellent residue flow and leveling. This harrow utilizes 16 in. (41 cm) long, 7/16 in. (11.1 mm) diameter double-coil tines with 2-1/2 in. (63.5 mm) effective spacing. Tines rotate to prevent damage when backing up.



The **Spike Tooth Harrow** has a 5-bar design and 10 in. (254 mm) rank for excellent leveling and clod breakage. This harrow utilizes 11 in. (279 mm) long, 3/4 in. (19 mm) square width teeth with 1-1/2 in. (38 mm) effective spacing.

## VALUABLE VERSATILITY FOR VARYING SOIL TYPES

**Case IH Tiger-Mate 200 Advanced Leveling Systems (ALS)** evenly distribute soil and residue behind the field cultivator for a smooth, level field finish and easier planting. Three different ALS options are available... coil tine, spike tooth and tiger-tine harrows.




### **Tiger-tine harrow**

- Indexed tines on four bars create smooth, level fields by evenly distributing soil and residue, breaking clods and killing weeds
- Handles heavy residue without bunching or allowing clumped residue to drag

## UNPARALLELED FIELD PERFORMANCE

The **tiger-tine harrow** uses a unique combination of split-the-middle indexed tine placement, parallel linkage, and three-tine angle adjustments to achieve its superior field performance. The indexed tines on all four ranks create smooth, level fields by evenly distributing soil and residue through split-the-middle tine placement. Double tines on the first rank are centered between the sweeps

to knock down the ridge left by the shanks. The second, third and fourth ranks of the tiger-tine split the middle of prior ranks to again level any remaining ridge. The result is an effective 2 in. (51 mm) tine spacing that has unparalleled performance in the field. The parallel linkage and non-linked tine bars allow for independent movement and eliminate levelness settings while handling residue without bunching or allowing clumped residue to drag.

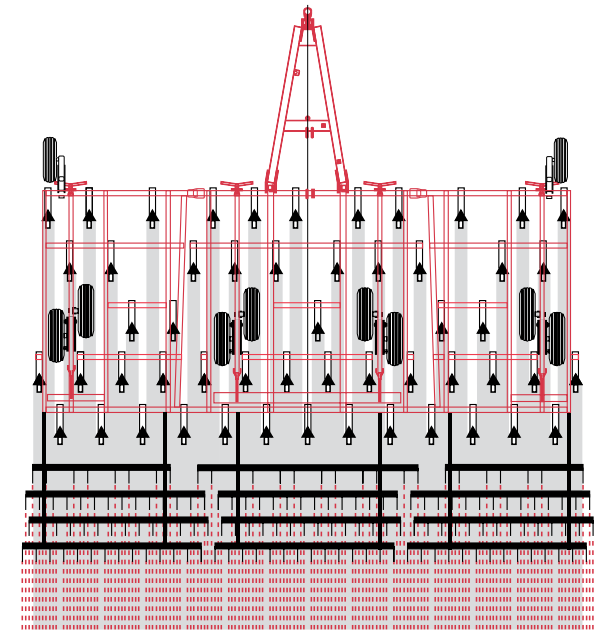

*The unique flexible design of the tiger-tine harrow prevents skips and gouges when going over terraces and through draws, while keeping it level from front to back and side to side. Depth and level adjustments are eliminated for maximum productivity in the field.*

*Two pins per arm adjust the tine angle and spring pressure (no tools are needed).*  
5° - for aggressive leveling in heavy soils with minimal residue.  
20° - the standard setting for most soils and residue.  
35° - for extremely heavy residue.

## SUPERIOR SYSTEMS FOR SMOOTHER SEED BEDS

---

**Case IH Advanced Conditioning Systems** increase your profit potential two ways: by improving seed bed conditions, and thereby yields, and by increasing operator efficiency. Like the Case IH tiger-tine harrow, these systems have no depth or level adjustments. **Just drop the cultivator and go!** The ACS leads the industry in consistent down pressure throughout an entire 26 in. (66 cm) trip clearance. It creates a **uniform soil finish in the most diverse conditions**, without compacting the soil.


**Match your desired field finish** with your soil environment and farming practice, and then select the Advanced Conditioning System that is best for your fields. No matter which ACS model you choose, you will create a smooth, level seed bed for easier planting and early, uniform emergence.





## DECISION GUIDE FOR HIGHER YIELDS BASED ON AGRONOMIC SEED BED CONDITIONS

### Step 1) Purchase Decision Based on Soil Conditions

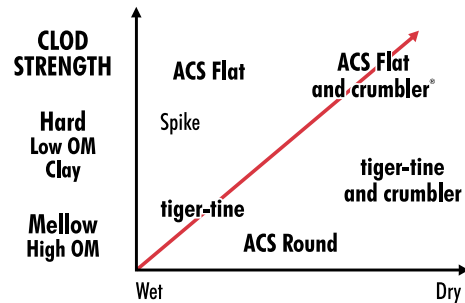

### Step 2) Use Decision Based on Weather Conditions

## BUILT FOR PERFORMANCE

- A.** 2-bar coil tine harrow is indexed to the rear shanks of the cultivator to effectively level the soil and distribute residue before the baskets. The parallel linkage eliminates depth adjustments.
- B.** No tools are needed to adjust tine angle for a customized field finish.
- C.** Adjustable spring down pressure per foot (60-80 lbs./27-36 kg).
- D.** Large, 14 in. (356 mm) baskets easily roll over obstructions.
- E.** Open basket centers for less basket load and plugging.
- F.** Basket arms can be easily adjusted up by turning one bolt per arm if conditions are too wet.



**ACS ROUND**

The ACS Round is used for moderate clod sizing and seed bed firming. Round rods crush clods, firm soil fines and leave protective larger clods on top. This unit has the same dimensions as the industry-leading Case IH Crumbler, only with hollow rods.



The ACS Round provides excellent seed bed finishing in mellow or sandy soils and works best in dry to moderately wet conditions. It can be run in wetter conditions than the Crumbler.



**ACS FLAT**

The ACS Flat is the choice for aggressive clod sizing without firming. Knife-like blades cut clods and throw soil and residue. All down pressure is concentrated on cutting action. The aggressive soil throwing action mixes fines and clods without firming, which speeds drying.



The ACS Flat works well in hard or high-clay soil. Because the ACS Flat does not firm, it can run in wet or dry conditions, and it can be run in wetter conditions than the Crumbler or ACS Round.


# THE FINAL TOUCH

## CRUMBLER SEED BED FINISHER

The **Case IH Crumbler** combines with the Tiger-Mate 200 to complete all of your secondary tillage in one pass.

- Reduces clod size
- Improves seed bed levelness
- 110 lbs. (49.9 kg) per foot of down pressure creates an ideal seed bed
- Knocks soil off of old root crowns and roots of existing weeds for additional weed control

There are 17 Crumbler sizes available from 12.5 ft. (3.8 m) to 50 ft. (15.2 m) to match with an appropriately sized field cultivator or disk harrow.

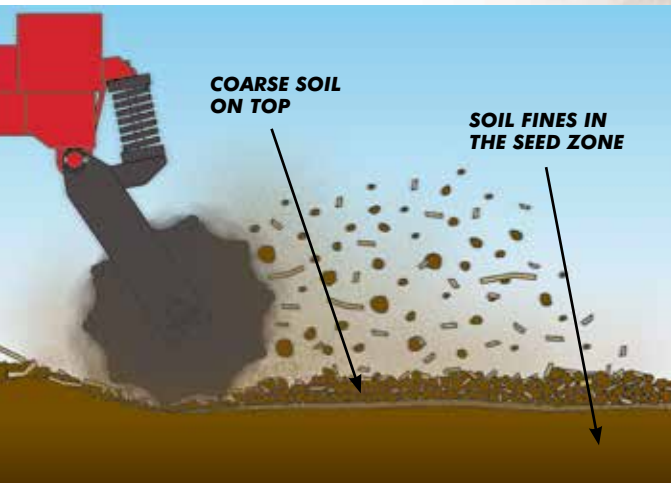

*This final tune-up creates an excellent seed bed of firm, fine soil covered by loose, coarse soil. The Crumbler firms soil to reduce air pockets and moisture evaporation and enhances chemical incorporation to reduce "hot spots."*



## TIGER-MATE 200

FRAME TYPE	WORKING WIDTH	MAINFRAME WIDTH	APPROX. TRANSPORT DIMENSIONS	
			WIDTH (MAX)*	HEIGHT (MAX)**
<b>Single-Fold:</b>	18.5 to 28.5 ft. (5.6 to 8.7 m)	10.5 ft. (3.2 m)	13.9 ft. (4.2 m)	12.5 ft. (3.8 m)
	30.5 ft. (9.3 m)	10.5 ft. (3.2 m)	14.4 ft. (4.4 m)	14.5 ft. (4.4 m)
	30.5 to 32.5 ft. (9.3 to 9.9 m)	12.5 ft. (3.8 m)	15.9 ft. (4.8 m)	13.3 ft. (4.0 m)
	34.5 to 38.5 ft. (10.5 to 11.7 m)	14.5 ft. (4.4 m)	17.9 ft. (5.5 m)	15.1 ft. (4.6 m)
<b>Double-Fold:</b>	38.5 to 46.5 ft. (11.7 to 14.2 m)	12.5 ft. (3.8 m)	16.9 ft. (5.2 m)	13.5 ft. (4.1 m)
	48.5 to 50.5 ft. (14.8 to 15.4 m)	14.5 ft. (4.4 m)	18.9 ft. (5.8 m)	13.6 ft. (4.2 m)
	54.5 to 60.5 ft. (16.6 to 18.4 m)	14.5 ft. (4.4 m)	18.9 ft. (5.8 m)	15.6 ft. (4.7 m)

### HITCH

Self-Leveling hitch with turnbuckle adjustment  
Swinging hose stand with operator's manual storage  
Perfect Hitch for easier hookup

### MAINFRAME

Industry-first bridge frame construction  
Five ranks of 3 x 4 in. (76 x 102 mm) side to side and double 2 x 2 in. (51 x 51 mm) fore/aft structural members  
Minimum rank spacing is 30 in. (76.2 cm)

### SHANKS

Split-The-Middle sweep pattern  
5/8 in. (15.9 mm) thick by 1-3/4 in. (44.5 mm) shanks  
Effective shank spacing is 6 in. (152 mm) with minimum 24 in. (60 cm) spacing on any rank  
Compression-spring design with 150 lbs. (68 kg) trip force and 14 in. (356 mm) trip height

### DEPTH CONTROL SYSTEM

Positive mechanical crank adjustment turnbuckle for fore/aft levelness with depth indicator  
Convenient, wrench-free adjustment from the front bar

### AVAILABLE OPTIONS

Rear hitch to pull Crumbler  
Standard or Long Nose sweeps  
Three **Advanced Leveling System** harrows available (3-bar coil tine, 4-bar tiger-tine and 5-bar spike tooth)  
Two **Advanced Conditioning Systems** available (**ACS Round** and **ACS Flat**)

### OPERATING GUIDELINES

Vary with soil conditions  
Requires approximately 4 to 7 pto horsepower per foot or 2 to 3.5 pto horsepower per shank  
Recommended operating speed is 5.5 mph (8.8 km/m) to 8 mph (12.8 km/m)



\* To outermost shank \*\* Without harrows (Transport height and width may vary with harrows and are approximates.)

## CRUMBLER

FRAME TYPE	WORKING WIDTH	MAINFRAME WIDTH	APPROX. TRANSPORT DIMENSIONS	
			WIDTH (MAX)*	HEIGHT (MAX)**
<b>Rigid:</b>	12.5 ft. (3.8 m)	12.5 ft. (3.8 m)	13 ft. (4.0 m)	4.5 ft. (1.4 m)
	15 ft. (4.6 m)	15 ft. (4.6 m)	15.5 ft. (4.7 m)	4.5 ft. (1.4 m)
<b>Single-Fold:</b>	18 ft. (5.5 m)	10 ft. (3.0 m)	13 ft. (4.0 m)	7 ft. (2.1 m)
	20 ft. (6.1 m)	10 ft. (3.0 m)	13 ft. (4.0 m)	8 ft. (2.4 m)
	22.5 ft. (6.9 m)	12.5 ft. (3.8 m)	15.5 ft. (4.7 m)	8 ft. (2.4 m)
	25 ft. (7.6 m)	10 ft. (3.0 m)	13 ft. (4.0 m)	11 ft. (3.4 m)
	27.5 ft. (8.4 m)	12.5 ft. (3.8 m)	15.5 ft. (4.7 m)	10 ft. (3.0 m)
	30 ft. (9.1 m)	15 ft. (4.6 m)	18 ft. (5.5 m)	10 ft. (3.0 m)
<b>Double-Fold:</b>	30 ft. (9.1 m)	10 ft. (3.0 m)	16 ft. (4.9 m)	9.5 ft. (2.9 m)
	32.5 ft. (9.9 m)	12.5 ft. (3.8 m)	18.5 ft. (5.6 m)	9.5 ft. (2.9 m)
	35 ft. (1.7 m) Narrow	10 ft. (4.6 m)	16 ft. (4.9 m)	12 ft. (3.7 m)
	35 ft. (1.7 m)	15 ft. (4.6 m)	21 ft. (6.4 m)	9.5 ft. (2.9 m)
	37.5 ft. (11.4 m)	12.5 ft. (3.8 m)	18.5 ft. (5.6 m)	12 ft. (3.7 m)
	40 ft. (12.2 m)	15 ft. (4.6 m)	21 ft. (6.4 m)	12 ft. (3.7 m)
	42.5 ft. (13.0 m)	12.5 ft. (3.8 m)	18.5 ft. (5.6 m)	12 ft. (3.7 m)
	45 ft. (13.7 m)	15 ft. (4.6 m)	21 ft. (6.4 m)	12 ft. (3.7 m)
	50 ft. (15.2 m)	15 ft. (4.6 m)	21 ft. (6.4 m)	14.5 ft. (4.4 m)

### HITCH

Telescoping tongue shortens for transport and storage  
Tongue lengths vary depending on working width and frame configuration

### MAINFRAME

Double-bar 4 x 4 in. (102 x 102 mm) members on mainframe and inner wings  
Single-bar 4 x 4 in. (102 x 102 mm) on outer wings

### REELS

14 in. (356 mm) diameter with 10 solid 7/8 in. (22.2 mm) bars  
Spring-cushioned with approximately 110 lbs. per foot (49.9 kg) of ground pressure

### HYDRAULICS

One lift circuit operates both wing-fold and transport cylinders and fittings; ISO tips

### TRANSPORT TIRES

9.5 L x 15 8-Ply tubeless rib implement tires

### OPERATING GUIDELINES

Vary with soil conditions  
Requires approximately 1 pto horsepower per foot  
Recommended operating speed is 5 mph (8.05 km/m) to 8 mph (12.87 km/m)

## Advanced Leveling Systems (ALS) Harrows

	3-bar Coil Tine	4-bar tiger-tine	5-bar Spike Tooth
<b>RANKS:</b>	3	4	5
<b>SPIKE/TINE LENGTH:</b>	16 in. (41 cm)	16 in. (41 cm)	11 in. (279 mm)
<b>SPIKE/TINE DIAMETER:</b>	7/16 in. (11.1 mm)	7/16 in. (11.1 mm)	3/4 in. (19.1 mm)
<b>SPIKE/TINE SPACING:</b>	7.5 in. (191 mm)	8 in. (203 mm)	7.5 in. (191 mm)
<b>EFFECTIVE SPIKE/TINE SPACING:</b>	2.5 in. (64 mm)	2 in. (51 mm)	1.5 in. (38 mm)
<b>TINE ANGLE ADJUSTMENT:</b>	5-position adjustment	3-position adjustment	

## Advanced Conditioning Systems (ACS)

<b>RANKS:</b>	2 ranks of tines	<b>LENGTH (FRONT TO BACK):</b>	77 in. (196 cm)
<b>RANK SPACING:</b>	15 in. (381 mm)	<b>BASKET DIAMETER:</b>	14 in. (356 mm)
<b>TINE LENGTH:</b>	16 in. (41 cm)	<b>FLAT BAR SIZE:</b>	1/4 x 1.25 in. (6.4 x 31.8 mm)
<b>TINE DIAMETER:</b>	7/16 in. (11.1 mm)	<b>ROUND TUBE SIZE:</b>	7/8 in. (22.2 mm) diameter hollow tubes
<b>EFFECTIVE TINE SPACING:</b>	4 in. (102 mm)	<b>BASKET DOWN PRESSURE:</b>	60-80 lbs. (27.2-36.3 kg)
<b>TINE ANGLE ADJUSTMENT:</b>	5°, 20°, or 35°		

Case IH dealers are the standard for expert sales, service and support of the most technologically advanced equipment in the world. They're committed to understanding your business and providing unique solutions to maximize your productivity.

From tractors to AFS precision farming technology, Case IH dealers offer a complete agricultural system. Coupled with timely parts and service, and flexible financial solutions through CNH Capital, Case IH dealers provide a total package to ensure you're always performing at your best.


But most importantly, Case IH dealers offer planning for the long-term growth of your business. By staying at the forefront of agronomic issues and the cutting edge of technology, they help prepare you for tomorrow.

Whatever it takes, Case IH dealers are dedicated to helping your operation achieve success season after season. Visit your Case IH dealer today to see the advantages of worldwide leadership.

Financing provided by

**CNH Capital**



 SAFETY NEVER HURTS!<sup>TM</sup> Always read the Operator's Manual before operating any equipment. Inspect equipment before using it, and be sure it is operating properly. Follow the product safety signs, and use any safety features provided.

Case IH and CNH Capital are registered trademarks of CNH America LLC. Any trademarks referred to herein, in association with goods and/or services of companies other than CNH America LLC, are the property of those respective companies.

CNH America LLC reserves the right to make improvements in design and changes in specifications at any time without notice and without incurring any obligation to install them on units previously sold. Specifications, descriptions and illustrative material herein are as accurate as known at time of publication, but are subject to change without notice.

This literature has been published for worldwide circulation. Availability of some models and equipment builds varies according to the country in which the equipment is used.

**CASE IH**