



**BUSH HOG®**

# Skid Steer Brush Cutters

IF IT DOESN'T SAY  
**BUSH HOG®**  
IT JUST WON'T CUT IT™

BCSS SERIES





# BRUSH CUTTERS

**BCSS SERIES –  
CLOSED FRONT**

**BCSS-60LF / BCSS-60 / BCSS-72LF / BCSS-72 / BCSS-72HF / BCSS-90 / BCSS-90HF**

## **Bush Hog® BCSS Closed Front Brush Mowers**


The Bush Hog line of BCSS skid steer brush cutters makes clearing brush and saplings easy with a selection of models designed for durability and performance. The closed front models boast heavy duty design features including solid one piece steel decks, long-lasting high tempered steel blades, balanced stump jumpers and welded collars underneath the deck to ensure years of solid performance. Complementing the heavy duty structural elements, all BCSS brush cutters incorporate optimal hydraulic motors and right angle gear boxes to achieve peak production – characterized by the highest torque available and sustained blade tip speeds proven effective in brush cutting applications. Shipped in HD wooden crates for added protection, each unit comes with hoses, couplers and gearbox guard for true “plug and play” – just pair with the appropriate carrier based on hydraulic flow (GPM) and start clearing a path.



BCSS-72  
Single Spindle



Offset Multi-Spindles  
and Blades

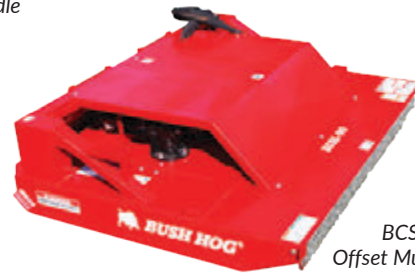

BCSS-90  
Offset Multi-Spindle

### **Optimized to Achieve Peak Performance**

- Solid one piece ¼" steel deck
- High tempered steel blades
- Hydraulic motor & right-angle gearbox pairing to achieve max. torque and ideal blade tip speed
- Balanced stump jumper
- 60" and 72" Single Spindle
- Welded collar to protect gearbox
- 90" Offset Multi-Spindle
- Replaceable galvanized front safety chains

### **BCSS SERIES BRUSH CUTTER – CLOSED FRONT SPECIFICATIONS**

	MODELS: BCSS-60LF		BCSS-60	BCSS-72LF	BCSS-72	BCSS-72HF	BCSS-90	BCSS-90HF
<b>Duty Type</b>	Heavy Duty							
<b>Cutting Width</b>	60"			72"			90"	
<b>Overall Width</b>	61.750"			73.750"			93.250"	
<b>Overall Length</b>	72.250"			84.250"			78.375"	
<b>Weight</b>	950 lb.	970 lb.	1,168 lb.		1,224 lb.	1,790 lb.	1,840 lb.	
<b>GPM Flow</b>	10 - 15 GPM	16 - 25 GPM	15 - 20 GPM	21 - 25 GPM	26 - 40 GPM	20 - 25 GPM	26 - 40 GPM	
<b>Cutting Capacity</b>	3"	4"	3"	4"	5"	4"	5"	
<b>Operating PSI Cont./Int.</b>	3,000 / 3,500 PSI					3,000 / 4,100 PSI	3,000 / 3,500 PSI	3,000 / 4,100 PSI
<b>Spindle Config.</b>	Single Spindle						Offset Multi-Spindle	
<b>Blades</b>	(2) .500"x 4.0" High Strength Updraft						(4) .500"x 4.0" High Strength Updraft	
<b>Blade Rotation</b>	Counter Clockwise							
<b>Deck Thickness</b>	1/4" Steel							
<b>Motor Protection</b>	Pressure Reliefs							
<b>Drive Protection</b>	GRD-2 Bolt (Shear Bolt)							
<b>Motor/Gearbox Coupler</b>	Machined Steel							

**Bush Hog® BCSS  
Open Front Brush Mowers**

BCSS open front models share many of the same premium design features including solid one piece steel decks, high tempered steel blades, balanced stump jumpers and welded collars underneath the deck. The single spindle standard design offers cutting widths of 60" and 72" with cutting capacity of 3"– 4". Available in 72" cutting width, the HD single spindle design with push bar feature offers a cutting capacity of 3"– 5". Select your preferred design and pair with the appropriate carrier based on hydraulic flow (GPM).



BCSS-S721  
Standard Single Spindle



BCSS-721  
HD Single Spindle

**Popular Design - Rugged and Durable Performance**


- Solid one piece ¼" steel deck
- Hydraulic motor & right-angle gearbox pairing to achieve max. torque and ideal blade tip speed
- 60" and 72" Single Spindle
- Standard design in low and standard GPM flows
- HD design featuring push bar in low, standard, and high GPM flows
- High tempered steel blades
- Balanced stump jumper
- Welded collar to protect gearbox

**BCSS SERIES BRUSH CUTTER – OPEN FRONT SPECIFICATIONS**

**MODELS: BCSS-S601LF | BCSS-S601 | BCSS-S721LF | BCSS-S721 | BCSS-721LF | BCSS-721 | BCSS-721HF**

Duty Type	Standard Duty				Heavy Duty		
Cutting Width	60"		72"				
Overall Width	61.750"		73.750"				
Overall Length	72.250"		84.250"				
Weight	840 lb.		1,000 lb.		1,186 lb.	1,220 lb.	1,270 lb.
GPM Flow	10 – 15 GPM	16 – 25 GPM	15 – 20 GPM	21 – 25 GPM	15 – 20 GPM	21 – 25 GPM	26 – 40 GPM
Cutting Capacity	3"	4"	3"	4"	3"	4"	5"
Operating PSI Cont./Int.	3,000 / 3,500 PSI						
Spindle Config.	Single Spindle						
Blades	(2) .500"x 4.0" High Strength						
Blade Rotation	Counter Clockwise						
Deck Thickness	1/4" Steel						
Motor Protection	Pressure Reliefs						
Drive Protection	GRD-2 Bolt (Shear Bolt)						
Motor/Gearbox Coupler	Machined Steel						





IF IT DOESN'T SAY  
**BUSH HOG**®  
IT JUST WON'T CUT IT™

2501 Griffin Avenue, Selma, Alabama 36703

Tel: 800-363-6096 | Fax: 334-874-2701



**BushHog.com**



**CONTENT DISCLAIMER:**

The products and information contained in this literature are subject to change without notice. Bush Hog® reserves the right to improve our products and make changes to specifications, designs, and standard equipment without notice. For additional product information, please visit Bush Hog®'s website or see your dealer for complete details.