



MASSEY FERGUSON



**MF 1526**  
24.8 HP | COMPACT TRACTOR

**BIG TRACTOR ATTITUDE.  
COMPACT PACKAGE.**





# MF 1526

ALL ABOUT  
**HARD WORK.**

THE MASSEY FERGUSON® 1526 IS BUILT ESPECIALLY FOR A GENERATION OF LANDOWNERS AND HOBBY FARMERS WHO WANT A TRACTOR THAT'S AS HARDWORKING AND NO-NONSENSE AS THEY ARE.






You Can Do More With This Tractor .....	4
Parts & Service .....	6
Technical Specifications.....	7



YOU CAN DO MORE  
WITH THIS TRACTOR.  
**BECAUSE IT'S MADE  
TO HANDLE MORE.**





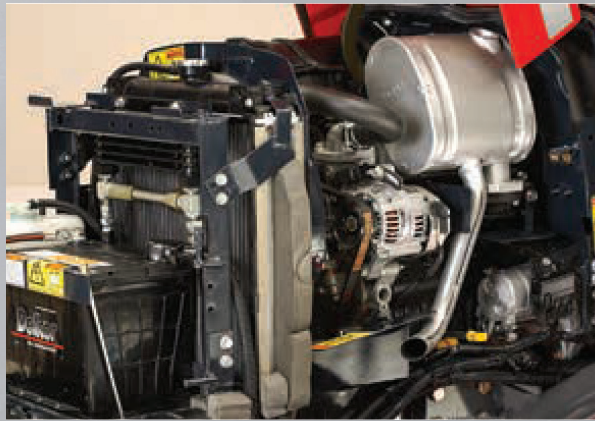

## STRAIGHTFORWARD

The work you do is hard. Driving your tractor is supposed to be the easy part.

- » **ELECTROHYDRAULIC PTO CLUTCH** — The electrohydraulic clutch features push-button control, so you can engage or disengage both on the go — no clutching, no reaching for levers.
- » **TRANSMISSION (HST WITH CRUISE CONTROL)** — A 3-range hydrostatic transmission with intuitive operation means faster range-gear selection, while separate forward and reverse foot pedals on the uncluttered platform give precise control of speed and direction.
- » **OPERATOR STATION** — The semi-flat platform gives you more legroom and makes entering and exiting the operator station easier.
- » **DUAL HYDROSTATIC CONTROL PEDALS** — Pedals are positioned to provide a more natural seating position during directional changes.
- » **BRAKE LOCATION** — The brake pedal has been moved to the left side of the platform for quicker use of the steering brake, allowing you to work more efficiently.
- » **INSTRUMENT PANEL** — Features a straightforward design that lets you read all tractor functions with a quick glance.

## DEPENDABLE

You want a stable tractor that lets you work harder and do more. We get that.

- » **FRAME** — A larger frame than other models in its category gives more stability and allows for more confident operation in numerous applications.
- » **STURDY** — Compare the tractor weight of the MF 1526 with that of the competition; this tractor has an excellent power-to-weight ratio.

## ACCESSIBLE

Truly a versatile workhorse — only better.

- » **MID PTO** — A rear and mid PTO give you more versatility. The rear PTO and mid PTO levers allow for independent or simultaneous operation of both drives.
- » **LOADER** — Attaching the bucket and changing it is simple. The FLx2106 comes standard with a skid steer tool carrier.





## PARTS & SERVICE

# IT'S ALL ABOUT A LIFETIME OF SUPPORT.

Buying, owning and maintaining equipment can be complex. That's why ensuring you have support and peace of mind is always an important consideration. With Massey Ferguson you can count on personalized, responsive support from our network of dealers. Plus, there's no cutoff time for parts and service, meaning we're available to you throughout the lifetime of your machine.



BUY PARTS ONLINE TODAY AT  
[parts.agcocorp.com](https://parts.agcocorp.com)



Ask your dealer about AGCO Protection, an extended warranty program that prolongs your coverage and safeguards against the cost of sudden breakdowns.

AGCO replacement parts are made to the same high standards as those used on the assembly line, so your AGCO equipment will stay running like new. Talk to your dealer or shop at [parts.agcocorp.com](https://parts.agcocorp.com) to find the genuine AGCO parts you need.

Focus on your operation, not on scheduling maintenance. With AGCO GenuineCare plans, your service intervals are predetermined. You'll avoid downtime and be able to better plan your costs thanks to transparent pricing, bundles and discounts.



# TECHNICAL SPECIFICATIONS

<b>MODEL</b>		<b>1526</b>
<b>Engine</b>		
Rated engine power	HP (kW)	24.8 (18.5)
PTO power	HP (kW)	20.1 (15)
Rated engine speed		2,600
Engine type		3-cylinder diesel
Displacement	in. <sup>3</sup> (L)	91.4 (1.5)
Cooling system		Liquid cooled
Fuel tank capacity	gal. (L)	7.1 (27)
<b>Transmission</b>		
Hydrostatic ranges		3 with cruise
Rear brakes		Wet, multiple disc
<b>PTO</b>		
Rear PTO type		Independent 540 RPM
Control		Electrohydraulic
Mid PTO type – Opt.		Independent 2000 RPM
<b>Hydraulics</b>		
Type of system		Open center
Flow at remotes	gpm (LPM)	5.5 (20.9)
Power steering flow	gpm (LPM)	3.2 (12.3)
Total flow	gpm (LPM)	8.7 (33.2)
Rear remote valves		1 opt.
<b>3-Point Hitch</b>		
ASAE hitch		Cat. 1
Position control		Std.
Rate of drop control		Std.
Lift capacity @ hitch point	lbs. (kg.)	1,322 (600)
Lift capacity @ 24" behind	lbs. (kg.)	992 (450)
<b>Operator Area</b>		
Platform type		Semi-flat with rubber mat
ROPS type		Foldable
Seat type		Adjustable mechanical suspension
<b>Dimensions With R4 Tires</b>		
Overall length	in. (mm)	111 (2,820)
Min. overall width	in. (mm)	55.1 (1,400)
Max. height over ROPS	in. (mm)	96.1 (2,440)
Ground clearance	in. (mm)	11.6 (295)
Wheelbase	in. (mm)	61.4 (1,560)
Base weight	lbs. (kg.)	2,077 (942)



<b>Loader</b>		<b>FLx2106</b>
Max. lift height @ pivot pin	in. (mm)	83 (2,108)
Dump angle		42°
Rollback angle		31°
Lift capacity to full height @ 19.5" forward	lbs. (kg.)	852 (386)
Breakout force @ 19.5" forward	lbs. (kg.)	1,282 (582)
Bucket width	in. (mm)	54
<b>Mid-Mount Mower</b>		<b>1505</b>
Discharge type		Right side
Cutting width	in. (mm)	60 (1,524)
Cutting height	in. (mm)	1.5-4.0 (38-102)
Number of blades		3
Max blade tip velocity	ft/sec. (m/sec.)	320.2 (97.6)

\*Specifications are manufacturer's estimates at time of publication and are subject to change without prior notification.




We proudly support:





**APPLY  
ONLINE**  
FOR FINANCING



APPLY NOW FOR PRE-APPROVAL\*  
[www.masseyferguson.us](http://www.masseyferguson.us)



or scan the QR code to get started.

 **AGCO**  
Your Agriculture Company

\*Currently only available for individual applicants. Subject to credit review and approval and other terms and conditions. All financing is in AGCO Finance LLC's sole discretion.  
©2023 AGCO Corporation. Massey Ferguson is a worldwide brand of AGCO Corporation. AGCO and Massey Ferguson are trademarks of AGCO. All rights reserved. | MF23B004FCv02



**MASSEY FERGUSON**

BORN TO **FARM**