

POST POUNDERS



Renegade & Renegade+

Trailer Model

The Renegade is AGI's most popular model. The trailer mounted post pounder offers the convenience of towing posts with you as you work. The telescoping hitch, telescoping mast and four-way tilt direction provide the flexibility of working on uneven surfaces, allowing you to pound posts exactly where they need to be.

- Renegade mast raises up to 11' 11" with 660 lbs of hammer pressure
- Renegade+ mast raises up to 13' 8" with 720 lbs of hammer pressure
- Bolt on hammer head with several mounting positions to accommodate different post heights
- Greaseless poly slides are low maintenance and worry-free
- Attached post bin to hold and transport posts with the unit
- Standard, hydraulic post hugger with cast iron cones

OPTIONS

- Square and T-post huggers available
- The optional pilot auger drills all soil conditions and most rock obstructions, making it easier to pound posts



Renegade shown with optional Pilot Auger

POST HUGGER STYLES



Square Post Hugger



T-Post Hugger



Cast Iron Cones

Outlaw & Outlaw+

3PT Side Mast

The Outlaw is a highly versatile three-point hitch model. The free-standing unit features a telescoping mast and tilt functions that allow you to take this unit anywhere a tractor can go, including side hills. The adjustable hammer head gives you the flexibility of using different post lengths.

- Outlaw mast height adjusts from 9' 6" to 11' 11" with 660 lbs of hammer pressure
- Outlaw+ mast adjusts from 9' 8" to 13' 8" with 720 lbs of hammer pressure
- Bolt on hammer head with several mounting positions to accommodate different post heights
- Greaseless poly slides are low maintenance and worry-free
- Low center of gravity and wide stance for added strength and stability
- Standard, hydraulic post hugger with cast iron cones

OPTIONS

- Square and T-post huggers available
- The optional pilot auger drills all soil conditions and most rock obstructions, making it easier to pound posts



Outlaw 3PT Hitch Side Mast shown


POST HUGGER STYLES



Square Post Hugger



T-Post Hugger

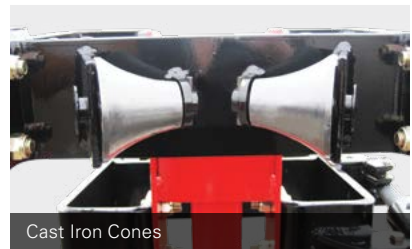

Cast Iron Cones

Sheriff

Skid Steer or 3PT Center Mast

The Sheriff is a free-standing, center mast post pounder that comes with a universal mount for skid steers, allowing it to easily transport with your skid steer. The adjustable hammer head accommodates a variety of different post lengths.

- Non-self-contained hydraulic system
- Adjustable height from 9' 6" to 11' 3" with 660 lbs of hammer pressure
- Center mast configuration improves center of gravity and stability of the unit
- Standard, hydraulic post hugger with cast iron cones

OPTIONS

- Square and T-post huggers available, depending on your needs
- The optional pilot auger drills all soil conditions and most rock obstructions, making it easier to pound posts
- Self-contained hydraulic system allows you to hook the skid steer hydraulics



Sheriff Skid Steer Center Mast shown


FEATURES




Square Post Hugger



T-Post Hugger

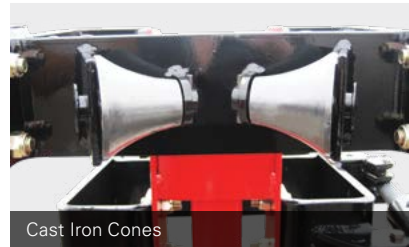

Cast Iron Cones

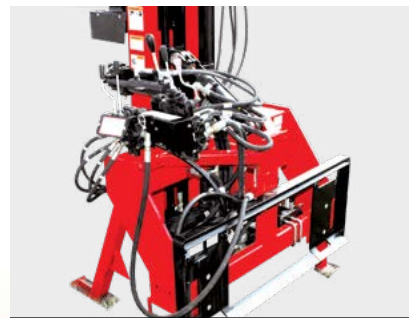

Universal Mount Plate



Optional Self-Contained Hydraulic System

Bandit

3PT Hitch

The Bandit is a center mast three-point hitch post pounder made for smaller jobs and level ground.

- Non-self-contained hydraulic unit that runs off the tractor
- Four-way tilt mast raises up to 9' with 600 lbs of hammer pressure

OPTIONS

- Self-contained kit to run off the tractor PTO



Bandit 3PT Hitch Center Mast shown


FEATURES




Square Post Hugger



T-Post Hugger

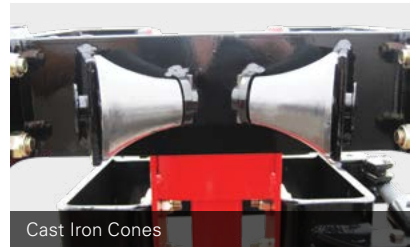

Cast Iron Cones

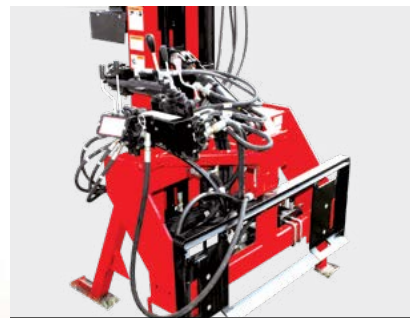

Universal Mount Plate



Optional Self-Contained Hydraulic System

SPECIFICATIONS

MODEL	RENEGADE TRAILER MODEL	RENEGADE+ TRAILER MODEL	OUTLAW 3PT SIDE MAST	OUTLAW+ 3PT SIDE MAST	SHERIFF SKID STEER CENTER MAST	SHERIFF 3PT CENTER MAST	BANDIT
WEIGHT	2580 lbs / 1170 kg	2930 lbs / 1329 kg	2220 lbs / 1007 kg	2450 lbs / 1111 kg	1500 lbs / 680 kg	1410 lbs / 640 kg	720 lbs / 327 kg‡
HAMMER WEIGHT	660 lbs / 299 kg	720 lbs / 326 kg	660 lbs / 300 kg	720 lbs / 326 kg	660 lbs / 299 kg	660 lbs / 299 kg	600 lbs (with ballast)‡‡
TRANSPORT HEIGHT	8' 2", 8' 10" / 249 cm, 269 cm	8' 9", 9' 5" / 267 cm, 287 cm	8' 2", 8' 10" / 249 cm, 269 cm	8' 9", 9' 5" / 267 cm, 287 cm	8' 2" / 249 cm	8' 2" / 249 cm	8' 8" / 264 cm
TRANSPORT WIDTH	7' 2" / 218 cm	7' 2" / 218 cm	6' 2" / 188 cm	6' 2" / 188 cm	36" / 91 cm	36" / 91 cm	4' 1" / 125 cm
TRANSPORT LENGTH	10' 1" / 307 cm	10' 6" / 320 cm	5' 4" / 163 cm	5' 4" / 163 cm	43" / 109 cm	43" / 109 cm	3' 4" / 102 cm
HAMMER HEIGHT MAX	9' 6" - 11' 3" / 290 cm - 363 cm	9' 8" - 14' 5" / 295 cm - 439 cm	9' 6" - 11' 11" / 290 cm - 363 cm	9' 8" - 13' 8" / 295 cm - 417 cm	9' 6" - 11' 3" / 290 cm - 363 cm	9' 6" - 11' 3" / 290 cm - 363 cm	9' 4" / 285 cm
HAMMER HEIGHT MIN	4' 2" / 127 cm	4' 2" / 127 cm	4' 2" / 127 cm	4' 2" / 127 cm	4' 2" / 127 cm	4' 2" / 127 cm	4' / 122 cm
STROKE	64" / 163 cm	64" / 163 cm	5' 6" / 168 cm	5' 6" / 168 cm	5' 4" / 163 cm	5' 4" / 163 cm	5' 4" / 163 cm
DRIVE OPTIONS	540 RPM PTO or 13 HP Honda	540 RPM PTO or 13 HP Honda	540 RPM PTO	540 RPM PTO	***SKID STEER HYD. †SELF CONTAINED HYD.	***TRACTOR HYD. ††SELF CONTAINED HYD.	***TRACTOR HYD. ††SELF CONTAINED HYD.
MIN HYDRAULIC REQUIREMENT	—	—	—	—	10 gpm @ 1500 psi 38 lpm @ 103 bar	10 gpm @ 1500 psi 38 lpm @ 103 bar	7 gpm @ 1500 psi 27 lpm @ 103 bar
TILT ADJUSTMENT -FRONT/BACK	30° (+/- 15° from vert.)	30° (+/-15° from vert.)	30° (+/-15° from vert.)	30° (+/-15° from vert.)	26° (+/-13° from vert.)	26° (+/-13° from vert.)	34° (+/-17° from vert.)
TILT ADJUSTMENT -LEFT/RIGHT	50° (±25° FROM VERT.)	50° (±25° FROM VERT.)	50° (±25° FROM VERT.)	50° (±25° FROM VERT.)	40° (±20° FROM VERT.)	40° (±20° FROM VERT.)	32° (±16° FROM VERT.)
TIRES	15"	15"	—	—	—	—	—

* 2-Position adjustable mast on side mast pounder models

** 4-Position adjustable bolt on cast head on High & Heavy Hitter pounder, 3-Position adjustable bolt on cast head on High & Heavy Hitter Plus Models

‡ Total weight is 720 lbs without ballast

‡‡ Hammer weight is 320 lbs without ballast. User must add ballast for best performance

SKID STEER POST POUNDERS

Includes inline hydraulic oil filter on return line (self-contained units only)

*** Requires return line plumbed directly into skid steer/tractor hydraulic oil reservoir.

† Self-contained hydraulics has on board oil reservoir with pump & hydraulic motor driven by skid steer hydraulics.

†† Self-contained hydraulics has on board oil reservoir with PTO pump driven by tractor PTO.

PILOT AUGER BIT SPECIFICATIONS

	4" / 10 CM	6" / 15 CM
LENGTH	54" / 137 cm	54" / 137 cm
WEIGHT	40 lbs / 18 kg	57 lbs / 26 kg
CARBIDE TEETH #	5	7
FLIGHTING THICKNESS	$\frac{3}{8}$ " / 9.5 mm	$\frac{3}{8}$ " / 9.5 mm





AGI is a leading provider of equipment solutions for agriculture bulk commodities including seed, fertilizer, grain, and feed systems with a growing platform in providing equipment and solutions for food processing facilities. AGI has manufacturing facilities in Canada, the United States, the United Kingdom, Brazil, India and Italy and distributes its products globally.



Box 1750, Swift Current, Saskatchewan, Canada S9H 5R4
877.667.7421

AGGROWTH.COM aggrowthintl