

SUB TILLER 4TM ***3-Point and Pull Type***

**"SS"
AutoReset
Massive
Shanks**




Rugged, Versatile Conservation Tillage Equipment

- ▶ Fracture Hardpan
- ▶ Penetrate Soil 14" (36 cm) - 18" (46 cm) Deep
- ▶ Minimal Residue Disturbance
- ▶ Increase Root Growth & Penetration
- ▶ Maximize Moisture Absorption
- ▶ Improve Soil Structure and Tilth
- ▶ Five-Year Frame Warranty



FEATURES

BLU-JET

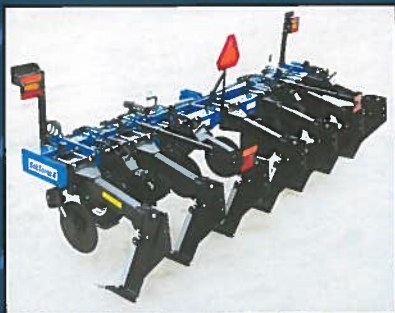


HD Double 7 x 7 Frame with 39" (99 cm) clearance handles high residue and high horsepower of DeepTill




Coulters on 10" (26 cm)


Optional StalkSizer slices stalks and improves tough residue flow

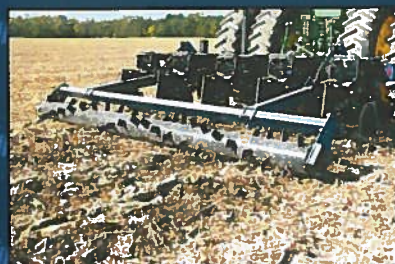

Optional Conservation Roller levels surface, flattens residue, and reduces erosion

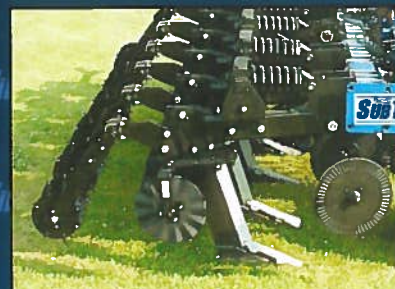

StripTill Option adapts SubTillers to one pass seedbed preparation and fertilizer placement

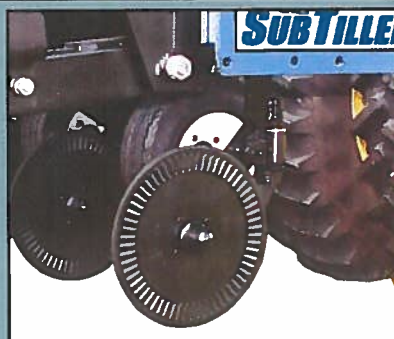

Super 1200 Swivel Coulters and 20" (51 cm) blades slice through heavy BT residue



Heavy Duty ShearBolt Shanks
High strength, 1-1/4" x 6" (3.2 cm x 15.24 cm) high carbon shank assures long, trouble free life



3-Point or Pull Type SubTiller 4

Base Unit	Product Specifications		
Base Frame Size	7'9" (2.36 m)	11'3" (3.43 m)	13'10" (4.22 m) + Extensions
Shanks & Spacing	2S30 3S30	4S30 5S30	6S30 7S30 8S30 9S30
Shank Spacings	30"-40" (76-102 cm)	30"-40" (76-102 cm)	20"-40" 30"-40" (51-102 cm)
Working & Transport Width	Nominal Frame Size or Shanks x Spacing		
Frame and Clearance	Double 7 x 7 x 3/8" (17.8 cm x 17.8 cm x 9.5 mm) (Welded Tube, 39" (99 cm) Under-frame)		
Extensions (Add 1, 2 or 4 Shanks)	14", 20", 29", 32", 44", 50", 59", 64" (36 cm, 51 cm, 74 cm, 1.11 m, 1.50 m, 1.63 m)		
Hitches	Cat II/III	Cat III	Cat III
Coulters & Blades	Super 1200 w/30 degree Swivel & 20" (51 cm) Fluted Blades (17" (43 cm) Rocks)		
HD Shanks	1-1/4" x 6" (3.2 cm x 15.24 cm) High Carbon x 44" (1.12 m) Long		
Shank Protection	ShearBolt (3/4" (1.9 cm) or AutoReset "SS" (>3200 lb. (14200 N) Trip)		
Vertical Wear Shin	Heat Treated, Reversible 1-7/16" x 22-1/2" (37 mm x 57 cm)		
Points: Fall	Full Loosening CADI, 14"-18" (36 cm - 46 cm) Depth		
Summer	InterRow Rip and StripTill CADI Points, 10"-18" (26 cm - 46 cm) Depth		
Gauge Wheels	Swing Adjust w/20.5x8-10 Tires (One or Two Pair)		
Tractor w/weights	30-50 ptohp (22-37 PTO kW)/Shank; 25-40 dbhp (18-29 DB kW)/Shank		
Soil Probe	Standard All Models		
Optional Equipment			
Trail Lite Kit	Optional up to 5S30 Standard 13'10" (4.22 m) Frames & Larger		
Conservation Roller	3S30 8' (2.44 m) to 7S30 17-1/2' (5.2 m)		
StalkSizer Kit	Additional Coulters 10" or 15" (26 cm or 38 cm) 5S30 to 7S30 Models		
StripTill Row Units	Disc Hillers & Torsion Mount Baskets		
Pull Type Hitch Kit (Jack, Chain, Clevis & Pintle)		Dual 6 x 4 A-Frame & Adjustable Top Link, HD Hydraulic Lift Wheels Dual 11L x 15 12 ply Tires (Except Single 4S30)	

BLU-JET®

SUBTILLER 4™

Folding

**A Proven
YIELD
BOOSTER!**




Large Acreage, High Horsepower Huge Production Folding SubTiller Models

- ▶ PullType Grain: 7S30, 9S30, 11S30
- ▶ PullType Row Crop: 8S30, 10S30, 12S30
- ▶ 3-Point Row Crop: 6S30, 7S30, 8S30
- ▶ 3-Point Wide Row: 6S36-40, 8S36-40

FEATURES



"SS" AutoReset Massive Springs automatically reset-even in hard ground

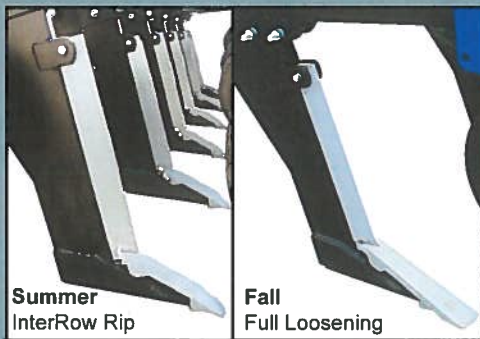


Summer
InterRow Rip

Fall
Full Loosening

Reversible Shins and Quick Change CADI Points provide high acreage and high wear

BLU-JET™

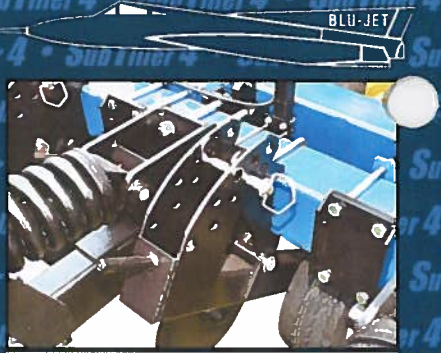

Exclusive Swing Adjust Gauge Wheels offer operator ease for quick depth adjustment



Folding SubTiller 4 (7 Shank 30)

Base Unit*	Product Specifications	
Base Frame Size&Wing	5 Shank Center Section	6 Shank Center Section
Shanks & Spacing	7S30, 9S30, 11S30	8S30, 1030, 12S30 (76 cm)
Shank Spacing	30" (76 cm) All Models	
Working Width	Shank x Spacing	
Transport Width	12'11", 12'11", (3.94 M) 14'3" (4.34 M)	15'6" (4.72 M)
Frame and Clearance	Double 7 x 7 x 3/8" (17.8 cm x 17.8 cm x 9.5 mm) (Welded Tube, 39" (99 cm) Under-frame	
Hitch	Dual 8" x 4" (20.3 cm x 10.2 cm) Tubular, Cat IV Wheatland, Jack & Chain	
Hydraulic Lift Wheels	Dual 11Lx15, 12ply High Lift(4)	11Lx15, 12ply High Lift Straddle
Lift Cylinders	4-1/2" & 4-3/4" x 16" Rephasing	2-3-1/2" x 12, 1-3-1/4" x 12" Rephasing, 1-3-1/2" x 12"
Coulters & Blades	Super 1200 w/30 degree Swivel & 20" (51 cm) Fluted Blades (17" (43 cm) Rocks)	
HD Shanks	1-1/4" x 6" (3.2 cm x 15.24 cm) High Carbon x 44" (1.12 M) Long	
Shank Protection	ShearBolt (3/4" (1.9 cm) or AutoReset "SS" (>3200 lb. (14200 N) Trip)	
Vertical Wear Shin	Heat Treated, Reversible 1-7/16" x 22-1/2" (37 mm x 57 cm)	
Points:Fall	Full Loosening CADI, 14"-18" (36 cm - 46 cm) Depth	
Summer	InterRow Rip and StripTill CADI Points, 10"-18" (26 cm - 46 cm) Depth	
Gauge Wheels	Swing Adjust w/20.5x8-10 Tires (One or Two Pair)	
Tractor w/weights	30-50 ptohp (22-37 PTO kW)/Shank; 25-40 dbhp (18-29 DB kW)/Shank	
Soil Probe	Standard All Models	
Trail Lite Kit	Standard All Models	
Optional Equipment		
StripTill Row Units	Disc Hillers & Torsion Mount Baskets	
*3-Point Folding Models	Consult Sales Manual	



High Lift, High Flotation Duals offer 18" (46 cm) operating depths and 10" (26 cm)+ transport clearance



HD Hinges and Hydraulics accommodate wide 11S30/12S30 operation and narrow transport



Exclusive BoltOn Extensions permits owners to add 1, 2 or 4 additional shanks

Distributed By:

Find Out More...Call the BLU-JET Hotline (800-658-3127) Today

Thurston Manufacturing Company • 1708 H Ave • Box 218 • Thurston, Nebraska, 68062-0218
Phone: 402-385-3041 • Fax: 402-385-3043

E-mail: box218@thurstonmfgco.com • www.thurstonmfgco.com

HARCO AG EQUIPMENT

5808 HWY 9 HARRISTON, ON NOG 1Z0

PH: 519-338-2923

FAX: 519-338-2756

sales@harcoag.ca