

SCHULTE

FX-209 Rotary Cutter



Most Versatile 9' Push / Pull Mower on the Market



- Reversing gearbox for push/pull -

1. Push or pull capability
2. Rigid single domed 7 guage deck construction
3. Two rotor base unit common to all configuration
4. Pull type, three point, semi mount and semi mount swing hitching options
5. 540 and 1000 RPM drive options
6. 9ft / 3m overall width
7. Heavy duty gear boxes and G8 drive lines
8. Pull type unit has the ability to accept open clevis, solid tongue, adjustable clevis or precision hitch options
9. Four tire options: solid laminate, severe duty, severe duty foam filled or forklift tires
10. 1/4" x 4" deck protection ring to guard against blade to deck damage

WORLD CLASS...BUILT TO LAST

FX-209 Specifications

SPECIFICATIONS

Overall Width	116.5" (2.96 m) Skids Inboard 120.5" (3.06 m) Skids Outboard
Overall Length	162.5" (4.1 m) Trailing Unit, 127" (3.3 m), 3 Point / Semi Mount Swing / Semi Mount
Transport Clearance	11.5" (29.2 cm)
Cutting Height	2" - 13" (5.1 cm - 33 cm)
Cutting Width	109.25" (2.78 m)
Cutting Capacity	3" (7.6 cm)
Approximate Weight	2400 lbs (1088 kg) Trailing, 2300 lbs (1043 kg) 3 Point, 2100 lbs (952 kg) Semi Mount 2860 lbs (1297 kg) Semi Mount Swing
Hitch Type	Cat. II & III 3 Point / Semi Mount Swing (13" left or right swing), Semi Mount / Trailing Pull
Deck Thickness	7 GA (3/16", 4.6 mm)
Side Skirt	1/4" x 13.75" (6.35 mm x 337 mm)
Gear Box Rating	Outboard 210 HP (157 kW)
Blade Tip Speed	540 RPM - 17086 FPM 1000 RPM - 17355 FPM
Blade Overlap	4.75" (121 mm)
Tractor PTO Speed	540 or 1000 RPM
Minimum Tractor HP	50 HP (37.3 kW)
Deflectors	Double Chain Front and Rear
Deck Protection Rings	1/4" X 4"



- Open Clevis Hitch -



- Adjustable Clevis Hitch -



- Solid Tongue Hitch -



- Precision Hitch -



- Semi Mount Swing Hitch -



- Trailing Hitch -



- Three Point Hitch -

FX-209 OPTIONS

Hitch	Trailing / 3 Point / Semi Swing Mount / Semi Mount
Trailing Attachment	Standard Clevis / Adjustable Clevis / Solid Tongue / Precision Hitch
Rear Wheel Beam	Hydraulic or Non Hydraulic
Tires	Laminate / Severe Duty / Severe Duty Foam Filled / Forklift
Cutting Elements	Pans with Schulte Super Suction Blades
Safety Belting	1/2 Length Front and Rear

SCHULTE



Schulte Industries Ltd.

P.O. Box 70, Englefeld, Saskatchewan, Canada S0K 1N0

Tel: (306) 287-3715 Fax: (306) 287-3355

E-Mail: info@schulte.ca


Visit our Web site at: www.schulte.ca

Schulte is a registered trademark of Alamo Group Inc.

Schulte Industries Ltd. reserves the right to change the design, specification of its products without notice. Illustrations may include optional equipment and accessories, and may not include all standard equipment.



Sold By:

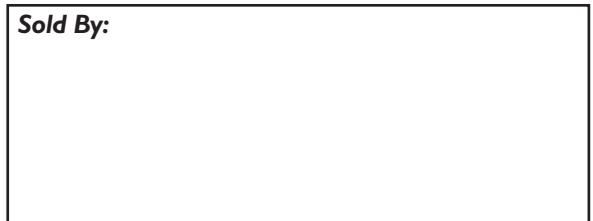

PRINTED IN CANADA

2017 02