


# ATHENS

## MODEL 55 MOUNTED DISK HARROW

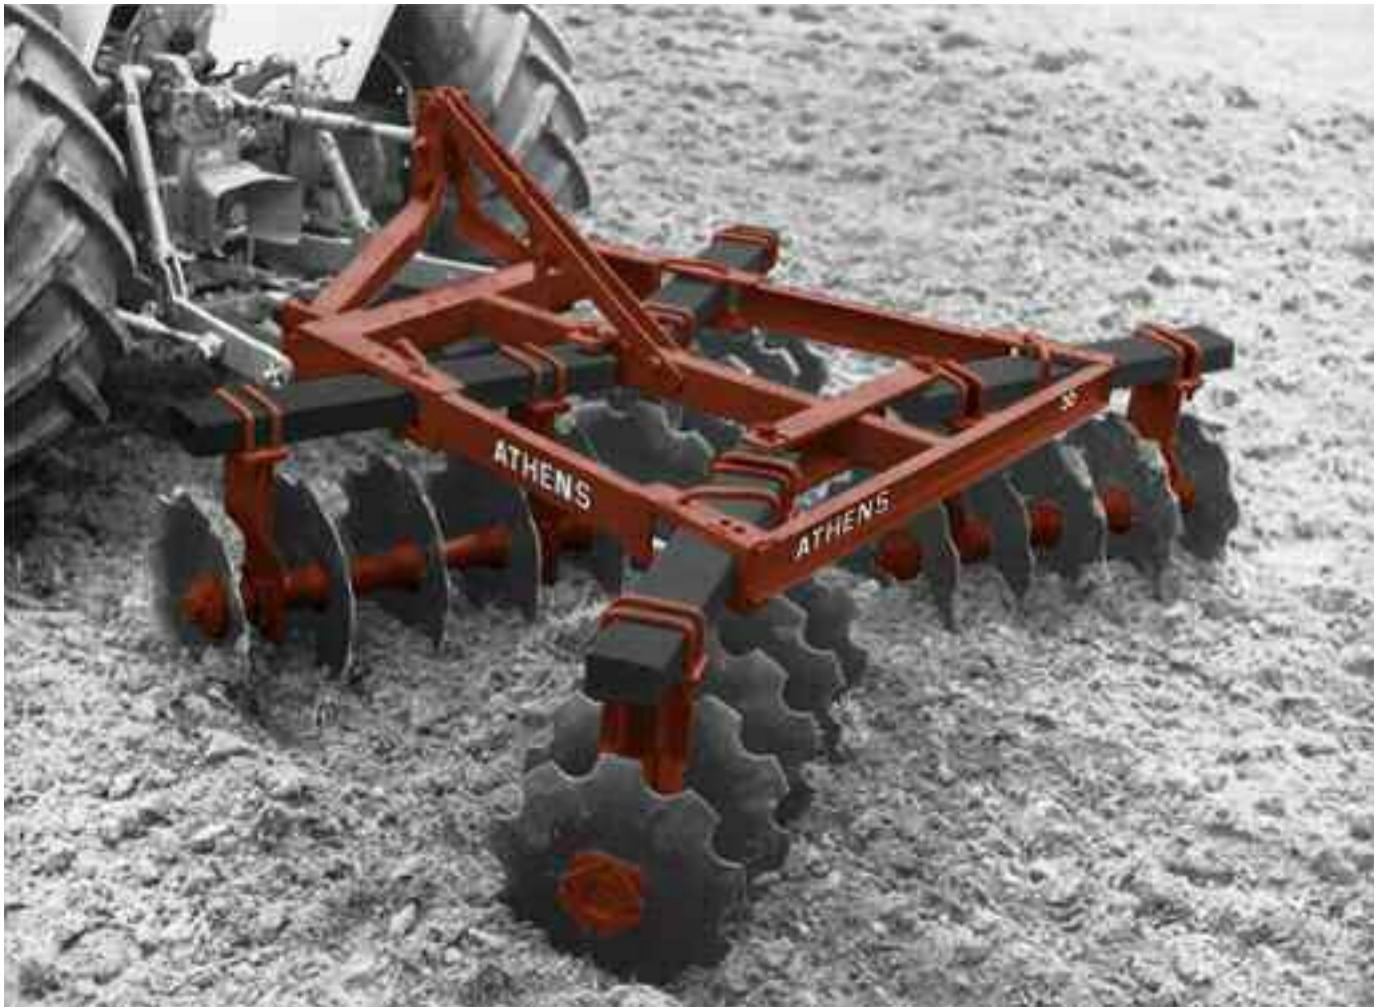

When it comes to rugged dependability and unsurpassed field performance, the Athens "55" is tops in its class!

This brawny, fully-mounted tandem has the weight (average 55# per disk) and strength to chop through stalks and stubble with ease...Plus quick and easy adjustments to provide excellent incorporation and seedbed finishing.



**ATHENS PLOW COMPANY, INC.**  
P.O. BOX 609  
ATHENS, TENNESSEE 37371-0609  
[WWW.ATHENSPLOWCOMPANY.COM](http://WWW.ATHENSPLOWCOMPANY.COM)

# 55 MOUNTED DISK HARROWS



## SPECIFICATIONS

Width of Cut	No. of Disks *	Approx. Weight
6' 6"	16	1104
7' 0"	18/20*	1188
7' 11"	20	1242
8' 2"	22/24*	1321
9' 4"	24/26/28*	1456

\* Number of disks vary with the combination of spacing 7½", 9", or 9" front and 7½" rear.

### STANDARD EQUIPMENT:

- Category II Hitch
- 1 ½" Cold Rolled Square Steel Axle
- Disk Gang Wrench
- Tapered Outside Rear Disk Gangs
- Adjustable Angle of Cut
- Flangette Bearing Hangers
- Relube Ball Bearings

### OPTIONAL EQUIPMENT:

- Category I or II Hitch
- 20" or 22" Disk Blades Cut Out or Smooth
- Disk Spacing—7½", 9" or 9" Front and 7½" Rear

### EXTRA EQUIPMENT:

- Heavy Duty Scraper Blades
- Balk Buster
- Cover Disk

## FEATURES

**RUGGED 3" x 5" GANG FRAME TUBES.** Provides rigid support for bearing hangers and gang components.

**HEAVY-DUTY BEARING HANGERS.** Rigid bearing hangers hold bearings in PERFECT alignment and assure gang rigidity for free turning disks. Hangers are secured to gang frames with heavy duty 5/8" U bolts.

### RELUBE BALL BEARINGS.

The bearings are shroud protected, heavy-duty, flangette type and have triple lip seals.

### FACTORY ASSEMBLED GANGS.

Gangs are tightened to 750 foot pounds, and locked securely with slotted nuts and cotter pins.

### ADJUSTING ANGLE OF CUT.

Adjusting is fast and easy from 13° to 21° in 4° increments to provide deeper penetration and more aggressive cutting and mixing action. Gangs adjust individually without tools by removing only one pin per gang. Disk gangs can be shim-leveled individually side-to-side.

### CHOICE OF DISKS.

You may chose from 20" or 22" disk blades in either smooth or cut out. All are high quality alloy steel for long life.

### SPACER AND BEARING SPOOLS.

Made from high strength cast iron to exacting specifications. The large flanged ends support more disk area and are arbor machined to assure a snug fit and precise bearing alignment.

### FRAME DESIGN.

Compact, close-coupled design allows easy lifting, straight pulling, and excellent maneuverability in small fields and around close obstacles.

### EXTRA EQUIPMENT FEATURES SCRAPERS.

Heavy-duty scraper arms and knife-type blades provide maximum cleaning and clearance of trash.

### COVER DISKS.

Easily bolts on to outside rear gangs to remove ridges and furrows left by the front gang.

### BALK BUSTER.

Bolts on to main frame between the front gangs to cut out the ridge normally left between the front gangs. Made of ¾" x 2" alloy steel.

### UNITIZED FRAME.

Constructed from 4" channel and 4" x 4" steel tubing. Reinforced and truss braced to resist twisting and bending loads.

ATHENS PLOW CO., INC. guarantees each piece of equipment against defective materials and workmanship for a period of one year from the date of delivery to the purchaser unless otherwise specified. ATHENS PLOW CO., INC. reserves the right to make changes and/or improvements in design and construction of parts or machines without notice or obligation.

**ATHENS PLOW COMPANY, INC.**  
P.O. BOX 609  
ATHENS, TENNESSEE 37371-0609  
WWW.ATHENSPLOWCOMPANY.COM