

ATHENS

MODEL BBD5

Blueberry Disc 5'



"WE PLOW THE EARTH"

The Model BBD5 is primarily designed for re-establishing the row middles of the blueberry bushes, rebuilding the beds, and is also ideal for weed cultivation. The 5' working width makes it the perfect choice for blueberry bush rows on 9' centers.

www.athensplowcompany.com

STANDARD EQUIPMENT

- 1 1/4" Cold Rolled Square Gang Axle
- Relube Quadraseal Ball Bearings
- Rigid Bearing Hangers with Wear Plates
- Spacing, 9"
- Tapered Disc Gang, 22" - 16" C/O or SM
- Adjustable Angle of Cut: 15° or 18°
- Cat. II Free Link or Quick Coupler
- Balk Buster with 9" Sweep
- Gang Wrench

OPTIONAL EQUIPMENT

- Scrapers

FEATURES

Quadraseal Ball Bearings

Strong relube QUADRASEAL Ball Bearings on the Model BBD5 mean long life and less downtime.

The Rigid Bearing Hanger

features a Wear Plate that bolts onto the front-side of the bearing hanger adding extra protection to the front and bottom of the bearing housing.

The Main Frame is constructed of 1/4" thick steel tubing which is trussed braced to resist twisting and bending.

Gang Frames are constructed from 3" x 5" heavy wall structural steel tubing.

Angle of Cut

Adjustments from 15° to 18° are made without tools by removing only one pin per disc gang.

Vertical Flexibility

The Spring Leveling Rod Assembly allows the disc gangs to adjust and flex with the contour of the land between the rows.

MODEL BBD5 SPECIFICATIONS

WIDTH OF CUT	NUMBER OF DISCS	NUMBER OF BEARINGS	*APPROX. HP	APPROX. WEIGHT (lbs)
5' 0"	8	4	45	985
6' 6"	10	8	40-80	1048

*Approximate Horse Power (HP) is only a guide. Extremely hard, soft, or boggy conditions will change this figure.




DISC BLADES

The disc gangs are tapered from the inside-out starting with 22" diameter discs tapering down to 16" diameter discs. Available in Cutout or Smooth.

Smooth blades are best utilized in normal field conditions. They are more economical, wear longer, weigh more, and wear more evenly, thus staying sharper longer.

Cutout blades have an aggressive edge that trap and cut residue better than smooth blades.

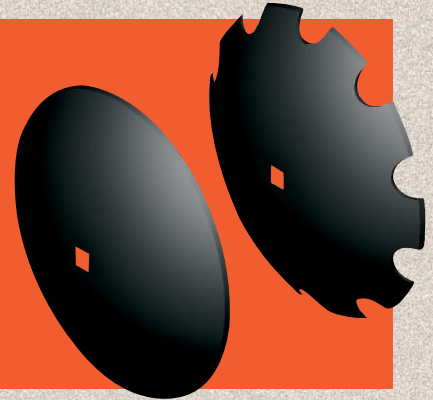

Athens Plow Co., Inc. guarantees each piece of equipment against defective materials and workmanship for a period of one year from the date of delivery to the purchaser unless otherwise specified. Athens Plow Co., Inc. reserves the right to make changes and/or improvements in design and construction of parts or machines without notice or obligation.