


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED

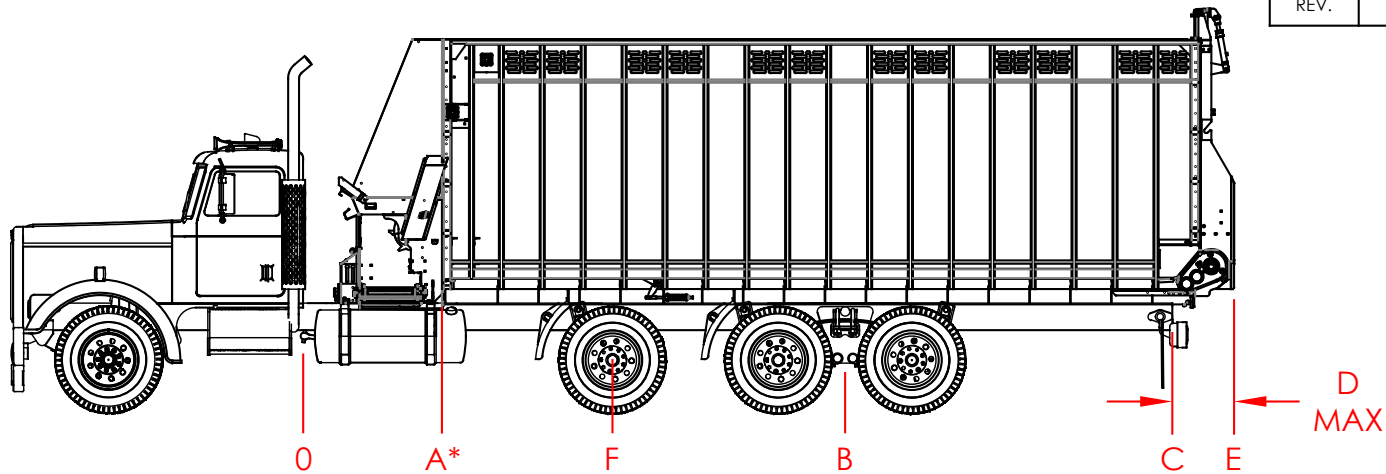

**HYDRAULIC SPECIFICATIONS-TRUCK WET KIT PROVIDED BY CUSTOMER**

30 GPM @ 1,500 TRUCK ENGINE RPM  
 3,000 PSI PEAK PRESSURE W/RELIEF VALVE INSTALLED & SET AT 3,000 PSI  
 45-50 GALLON RESERVOIR FILLED W/40 GALLONS OF HYDRAULIC OIL  
 3/4" HOSES WITH -12 FEMALE JIC SWIVEL ENDS REQUIRED FOR HOOKUP TO PRIORITY FLOW CONTROL (PROVIDED BY MEYER)  
 SELECTOR VALVE REQUIRED FOR FRONT/REAR SELECTION (NOT PROVIDED)  
**AN OIL COOLER IS REQUIRED TO BE INSTALLED WITH THE WET KIT OR SYSTEM DAMAGE WILL OCCUR.**

COOLER SPECIFICATIONS: HEAT DISSIPATION 75K-100K BTU/HR, COOLING FAN CONTINUOUS ON, 60-70 PSI BYPASS.

Select truck with axle, frame and horsepower configurations that match box capacities. Always follow Federal, State and local laws for lighting, weight and operation. Be sure box is located on the truck to provide safe weight distribution on the truck.

SIZE	A	B	C	D	E	F
8222	48"	204"	308"	24"	332"	N/A
8224	48"	216"	340"	24"	364"	N/A
8226	48"	224"	356"	24"	380"	143"

\*RESERVOIR FILL CAPS SHOULD BE LOCATED 8" BEHIND DIMENSION A

**SCALE EQUIPPED TRUCKS**



Truck/Box combinations equipped with optional scale packages require additional truck frame strength due to concentrations of load. All scale equipped units require a double framed truck. Noncompliant frame specifications will void Meyer warranty for related damage.

**TAIL LIGHT CONVERTER**

DEPENDING ON MAKE AND MODEL OF TRUCK IT MAY BE NECESSARY TO INSTALL A LIGHT CONVERTER, MEYER #56-0028. CONVERTER ALLOWS SIGNAL LIGHTS AND BRAKE LIGHTS TO OPERATE ACCORDING TO DOT LIGHTING REGULATIONS.

**LIGHTING SPECIFICATIONS**

**HIGHWAY LIGHT PACKAGE RECOMMENDED FOR ON ROAD TRANSPORT**  
 CUSTOMER TO SUPPLY A 7-PIN MALE & FEMALE PLUG OFF OF THE REAR OF THE CAB FOR LIGHT HOOK UP TO IMPLEMENT, LOCATED CENTRALLY BEHIND THE CAB. ORDER PART #56-0005-2 & 56-0014-1 FROM MEYER MANUFACTURING CORPORATION.

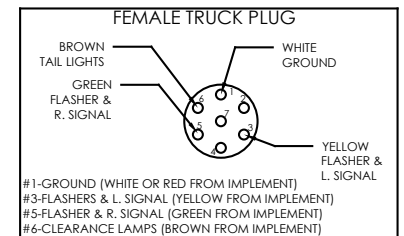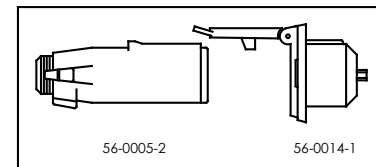

NAME		DATE		<b>MEYER MFG CORP.</b>		
DRAWN BY		PLF 04/29/20				
CHECKED				MATERIAL:		
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± 1/32" ANGULAR: BEND ± 0.5° TWO PLACE DECIMAL ± 0.02" THREE PLACE DECIMAL ± 0.005"				TITLE:		
				8200-RT TRUCK MOUNT SPECIFICATIONS		
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MEYER MFG CORP. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MEYER MFG CORP. IS PROHIBITED.				SIZE	DWG. NO.	REV.
				A	8200-RT TRUCK MOUNT SPECIFICATIONS	-
SCALE: 1:1		WT:		SHEET 1 OF 1		