



# SMR-800/600 Windrowers - Landscape Rakes

The rototilling action of the SMR-800's 8' drum breaks lumps, roots and other debris while reclaiming rocks by forming them in uniform rows. Great for land levelling, surface prep, soil conditioning, seed bed creation, driveway and walking path reclamation.

The 4" or 2.5" replaceable teeth give you greater ground penetration and are made of wear resistant 450 BHN heat treated steel.

The SMR-800 Multi-Rake is chain driven to keep the hydraulic motor out of harm's way. The #80 drive chain and bidirectional idler are located in a sealed chain case and run in an oil bath.

Option for standard rotating mount or floating mount. Also the drum can pivot up to 20° left or right, manually or with optional hydraulics.

Solid mounted 23" forklift grade tires for increased maneuvering and rugged durability.


Hydraulic motor options are available to suit skid steer hydraulic flow.



Chain case with tensioner and heavy #80 chain which is run in an oil bath and accessible with an easy access cover plate.



Adjustable, reversible side plates can be mounted on front or back of the unit

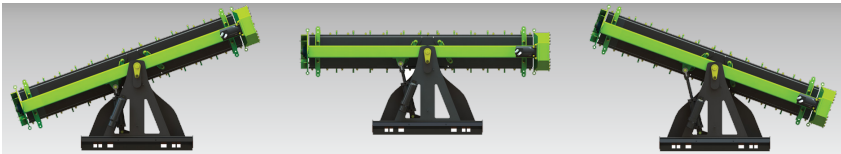

Drum angle movement 20° left or right



Replaceable teeth  
4" & 2 1/2" 450 BHN steel



Before Multi Rake use



After Multi Rake use



**World Class Built to Last**

[schulite.ca](http://schulite.ca)



All of the features of the SMR-800 but in a compact package. The rototilling action of the SMR-600's 6' drum breaks lumps, roots and other debris while reclaiming rocks by forming them in uniform rows. Great for land levelling, surface prep, soil conditioning, seed bed creation, driveway and walking path reclamation.

The 4" or 2.5" replaceable teeth give you greater ground penetration and are made of wear resistant 450 BHN heat treated steel.

Option for standard rotating mount or floating mount. Also the drum can pivot up to 20° left or right, manually or with optional hydraulics.


The SMR-600 Multi-Rake features solid mounted, 16.5/6.5 x 8, air filled tires for increased maneuvering and rugged durability.

Hydraulic motor options are available to suit skid steer hydraulic flow.

The SMR-600 is chain driven to keep the hydraulic motor out of harm's way.



Great for land use soil preparation

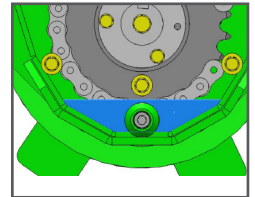

Gearbox oil level

The #80 drive chain is located in a sealed chain case and run in an oil bath.

### SPECIFICATIONS

Weight  
Tractor Horsepower  
Drum Width  
Maximum Ground Speed  
Recommended Ground Speed  
Drum Speed  
Tires  
Transport Width  
Transport Length  
Hydraulic Flow Option  
Hitch Type

**SMR-800**  
1900lb (862kg)  
-  
89" (2.26m)  
-  
-  
220-250rpm  
23" forklift (58cm)  
102" (2.59m)  
Standard: 79", Floating: 83"  
18-35 GPM (68-132 LPM)  
Skid Steer Quick Attach

**SMR-600**  
1600lb (725kg)  
-  
73" (1.85m)  
-  
-  
220-250rpm  
16.5/6.5 x 8 air filled  
88" (2.23m)  
Standard: 79", Floating: 83"  
18-35 GPM (68-132 LPM)  
Skid Steer Quick Attach



Replaceable teeth  
4" & 2 1/2" 450 BHN steel



Adjustable, reversible  
side plates



Chain case with tensioner  
and heavy #80 chain with  
easy access opening plate.



**Schulte Industries Ltd.**  
PO Box 70, Englefeld, SK Canada S0K 1N0  
Ph (306) 287-3715 Fx (306) 287-3355  
Email [info@schulte.ca](mailto:info@schulte.ca) Web [www.schulte.ca](http://www.schulte.ca)



ISO 9001

Sold By:

Printed in Canada

20106/15



Schulte is a registered trademark of Alamo Group Inc. Schulte Industries Ltd. reserves the right to change the design and specifications of its products without notice. Illustrations may include optional equipment and accessories, and may not include all standard equipment.