

SCHULTE®



RWP-1935 Spartan Rock Windrower/Picker

**Clean up your fields efficiently with one pass, one operator, one tractor.
Rock raking and picking in one operation with proven Schulte technology**

- 1 Easy, on-the-fly **adjustable working widths** of 16' - 19' (4.8m - 5.8m) for a variety of applications
- 2 Adjustable working depths down to 4.25" (11cm) help dislodge partially exposed stones
- 3 Strong, durable, proven hard surfaced teeth and batt reels ensure rocks from 2" to 27" are picked with ease
- 4 Large, 3.5 cu yd (2.68 cu m) bucket with a dumping height of over 8 1/2' (2.6m) for truck boxes or high piles
- 5 Separate hydraulic adjustment of windrower and reel speeds for custom windrowing and picking
- 6 Spring loaded 450 BNH batts and 1 1/2" (3.8cm) spaced T-Iron grate ensure minimal rock jamming
- 7 A tandem axle walking wheel system provides exceptional flotation and ground following



World Class *Built to Last*

schulte.ca

Specifications

SPECIFICATIONS

	RWP-1935
Working Width	192" – 229" (4,877 – 5816mm)
Overall Width	218" – 252" (5537 – 6654mm)
Overall Length	310" (7890mm)
Transport Width	118" (2988mm)
Transport Height	122" (3100mm)
Weight	15015lbs (6825kgs)
Hitch Weight	3520lbs (1600kgs)
Hopper Capacity	3.5 cu.yd (2.68 cu m)
Dumping Height	8' 7" (2616mm)
Tire Size Rock Picker	16.5L x 16.1 x 10 ply
Tire Size Windrowers	27 X 10.5-15 Skid Steer Tire
Minimum Tractor Size	125 HP
Tractor Hydraulic Requirements	16 GPM with two remotes
Recommended Reel Speed	40 RPM
Rock size capacity	2"-27" (5cm-69cm)


Options

-PTO Driven Windrower Drive Hydraulics

540-1-3/8" 6 Spline, 1000-1-3/8" 21 Spline, 1000-1-3/4" 20 Spline



Weight: 15015lbs (6825kgs)
Height: 122" (3100mm) Length 310" (7890mm)

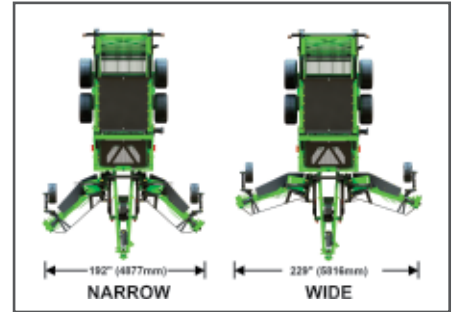

Variable width 192" – 229" (4877- 5816mm)
Width adjustment can be done on-the-fly




Rocks are easily removed by the two side windrowers with a variable working width of up to 19' (5.8m)



Windrowers with durable castor tires ensure rocks are easily moved away leaving a clean surface



The area behind the rock picker is left clean, with stones sized from 2"-27" (5cm - 69cm) removed



The dual windrowers have hydraulic motors with chain drive



All hydraulic motors have a built in cushion valves for longer life



Windrower hydraulic pump and cooling system ties into tractor PTO



Tandem walking axles with 16.5L X 16.1 X 10 ply flotation tires



Heavy duty batt springs, 450 BNH steel reel and grate with replaceable teeth



Rear and bottom grates ensure soil is easily sifted through the hopper



Dumping height 8' 7" (2616mm) allows for larger piles when dumping



Transport width is only 118" (under three metres)

SCHULTE

Schulte Industries Ltd.

PO Box 70, Englefeld, SK Canada S0K 1N0

Ph (306) 287-3715 Fx (306) 287-3355

Email info@schulte.ca Web www.schulte.ca



ISO 9001

Sold By:

Schulte is a registered trademark of Alamo Group Inc.

Schulte Industries Ltd. reserves the right to change the design and specifications of its products without notice. Illustrations may include optional equipment and accessories, and may not include all standard equipment.

Printed in Canada

22109/22

