

BUY KODIAK

40"

4'

5'

6'

Standard Duty Cutter LIFT TYPE

Every KODIAK Cutter Deck is Primed Before Applying a Quality High Gloss Paint for a Lasting Finish.

7" HD Side Channels

Replaceable Skid Shoes



Designed to last and built to perform for years of service.

Constructed with durable, channel sidewalls, replaceable skid shoes, KODIAK's new Flex Hitch, and solid welds, these cutters have the features that make KODIAK the best value for your money!

WARNING

KODIAK recommends that all customers purchase front and rear safety chain shielding in all applications to prevent injury or death.

SPECIFICATIONS

Top Link	Floating
Type Hitch	CAT I
Cutting Capacity	1 1/2" Material
Deck Thickness	11 GA Steel
Side Bands	HD 7" Channel
PTO Drive Shaft	Series 4
Slip Clutch	Optional
Stump Jumper	Pan Stump Jumper
Gear Boxes	40 HP
Wheels	Laminated
Hub	Regreaseable
Front Chain Guard	Optional
Rear Chain Guard	Optional
Weight 40"	390 lbs.
Weight 4'	436 lbs.
Weight 5'	510 lbs.
Weight 6'	645 lbs.
Pull Type	Optional

Specifications are subject to change without notice.

KODIAK  **423.336.2390**

Medium Duty Cutter

LIFT TYPE

5'

6'



Every KODIAK Cutter Deck is Primed Before Applying a Quality High Gloss Paint for a Lasting Finish.

SPECIFICATIONS	
Top Link	Floating
Type Hitch	CAT I
Cutting Capacity	2" Material
Deck Thickness	11 GA Steel
Side Bands	HD 7" Channel
PTO Drive Shaft	Series 4
Slip Clutch	Optional
Stump Jumper	5/8" Solid Stump Jumper
Gear Boxes	90 HP
Wheels	Laminated
Hub	Regreaseable
Front Chain Guard	Optional
Rear Chain Guard	Optional
Weight 5'	615 lbs.
Weight 6'	755 lbs.
Pull Type	Optional
Skid Shoes	Replaceable
Quick Hitch	Compatible

Specifications are subject to change without notice.

Engineered for Performance and Built for Years of Dependable Operation.

Starting with 11 gauge steel and years of design, this KODIAK Medium Duty Cutter provides powerful performance and a smooth cut. Quick hitch compatible with many other great options make this cutter a dependable choice. Also available in Pull Type.

WARNING

KODIAK recommends that all customers purchase front and rear safety chain shielding in all applications to prevent injury or death.

BUY KODIAK

5'

6'

7'

Heavy Duty Cutter LIFT TYPE



Heavy Duty Cutting Power for TOUGH Applications. It Gets the Job Done!

KODIAK's Heavy Duty Cutter is engineered to take on the toughest cutting jobs while providing optional configurations that make it useful in a variety of applications. Built for years of service, KODIAK's solid construction and performance make this implement among the best.

WARNING

KODIAK recommends that all customers purchase front and rear safety chain shielding in all applications to prevent injury or death.

7 Gauge Top Deck

8" HD Side Channels

SPECIFICATIONS

Top Link	Floating
Type Hitch	CAT I or CAT II
Cutting Capacity	3" Material
Deck Thickness	3/16" or 7 GA Steel
Side Bands	HD 8" Channel
PTO Drive Shaft	Series 6 w/Slip Clutch
Slip Clutch	Optional
Stump Jumper 5',6'	5/8" Solid Stump Jumper
Stump Jumper 7'	3/4" Solid Stump Jumper
Gear Boxes	90 HP
Wheels	Laminated Dual Tailwheels
Hub	Bearings
Front Chain Guard	Optional
Rear Chain Guard	Optional
Weight 5'	875 lbs.
Weight 6'	1205 lbs.
Weight 7'	1375 lbs.
Pull Type	Optional

Specifications are subject to change without notice.

KODIAK  **423.336.2390**

Heavy Duty Cutter

LIFT TYPE

BUY KODIAK

8'



Every KODIAK Cutter Deck is Primed Before Applying a Quality High Gloss Paint for a Lasting Finish.

SPECIFICATIONS	
Cutting Width	93"
Transport Width	98"
Type Hitch	CAT I or CAT II
Cutting Height	2" to 10"
Cutting Capacity	3" dia. material
Deck Thickness	10 GA Steel
Side Bands	HD 8" Channel
Recomm. Min. HP	42 HP
PTO Drive Shaft	Series 5 w/slip clutch
Center Drive Shaft	Shock Coupler Protected
Stump Jumper	5/8" thick, round
Gear Box	100 HP center box
Gear Boxes	2- 90 HP outboard
Wheels	Laminated Dual Tailwheels
Hub	Bearing
Front/Rear Chain Guard	Optional
Weight	1250 lbs.

Specifications are subject to change without notice.

The 8' Heavy Duty Cutter Gets Your Toughest Jobs Done Easily in Less Time.

KODIAK's Heavy Duty 8' Cutter is made for powerful cutting action in larger material and maintains a smooth cut. Take on the tough jobs with a 100 HP/90HP outboard gear box. Our heavy duty components are made to last!

WARNING

KODIAK recommends that all customers purchase front and rear safety chain shielding in all applications to prevent injury or death.

BUY KODIAK

10'

Heavy Duty Cutter LIFT TYPE



5200 Series: Extra Heavy Duty Construction with Massive Cutting Power.

Cut the time it takes for your toughest jobs by nearly half what it took in the past! KODIAK's 10' Heavy Duty Cutter delivers the cutting power and performance to take on large jobs and constructed to be easy and dependable.

WARNING

KODIAK recommends that all customers purchase front and rear safety chain shielding in all applications to prevent injury or death.

SPECIFICATIONS

Cutting Width	116"
Transport Width	122"
Type Hitch	CAT I or CAT II
Cutting Height	2" to 10"
Cutting Capacity	3" dia. material
Deck Thickness	3/16" or 7 GA Steel
Side Bands	HD 8" Channel
Recomm. Min. HP	52 HP
PTO Drive Shaft	Series 5 w/slip clutch
Center Drive Shaft	Shock Coupler Protected
Stump Jumper	5/8" thick, round
Gear Box	100 HP center box
Gear Boxes	2- 90 HP outboard
Wheels	Laminated
Hub	Ball Bearing
Front/Rear Chain Guard	Optional
Weight	1480 lbs.
Quick Hitch	Compatible
Skid Shoes	Replaceable

Specifications are subject to change without notice.

KODIAK  **423.336.2390**

Heavy Duty Cutter

PULL TYPE

BUY KODIAK

8' 10'



Side To Side Adjustable Wheel Spacing.



8 ft.	SPECIFICATIONS	10 ft.
93"	Cutting Width	116"
98"	Transport Width	122"
Center Pull Self Leveling	Type Hitch	Center Pull Self Leveling
2" to 12"	Cutting Height	2" to 12"
3" dia. material	Cutting Capacity	3" dia. material
10 GA Steel	Deck Thickness	3/16" or 7 GA Steel
HD 8" Channel	Side Bands	HD 8" Channel
Fold up - removable	Tongue Jack	Fold up - removable
36 HP	Recomm. Min. HP	42 HP
3x8 with hose	Hydraulic Cylinder	3x8 with hose
Constant Velocity w/slip	PTO	Constant Velocity w/slip
Shock Coupler Protected	Center Drive Shaft	Shock Coupler Protected
5/8" thick, round	Stump Jumper	5/8" thick, round
100 HP center box	Gear Box	100 HP center box
2- 90 HP outboard	Gear Boxes	2- 90 HP outboard
21" Laminated	Tail Wheels	21" Laminated
Ball Bearing	Spindle Hubs	Ball Bearing
Optional	Front/Rear Chain Guard	Optional
1410 lbs.	Weight	1790 lbs.
Replaceable	Skid Shoes	Replaceable

Specifications are subject to change without notice.

5200 Series: Pull-Type Cutters

KODIAK's Heavy Duty Pull Cutters are made for a wide range of cutting heights up to 12". Now you can have the most flexibility for tough jobs backed with the power of a 100 HP/90 HP outboard gear box. Built with solid construction to last for years of dependable service.

WARNING

KODIAK recommends that all customers purchase front and rear safety chain shielding in all applications to prevent injury or death.

BUY KODIAK

5'

6'

M-Heavy Duty Cutter ROUNDBACK



Versatile, Professional Performance that Makes Your Cutting Job Easy.

KODIAK's Medium-Heavy Roundback Cutter is designed to cut with a smooth finish and distribute material evenly. With up to 10" cutting height, this versatile cutter has many customizing options to fit your needs. Make your cutting jobs easy and professional year after year with this economical and durable cutter.

WARNING

KODIAK recommends that all customers purchase front and rear safety chain shielding in all applications to prevent injury or death.

SPECIFICATIONS

Type Hitch	CAT I
Cutting Height	2" to 10"
Cutting Capacity	2 1/2"
Deck Thickness	10 GA Steel
Side Bands	3/16" Channel
PTO Drive Shaft	Series 5 w/slip & 540 RPM
Slip Clutch	Optional
Stump Jumper	5/8" thick, round
Gear Boxes	90 HP
Wheels	Laminated
Hub	Tapered Roller Bearing
Front/Rear Chain Guard	Optional
Weight- 5' slip clutch	655 lbs.
Weight- 6' slip clutch	815 lbs.
Quick Hitch	Compatible
Skid Shoes	Replaceable


Specifications are subject to change without notice.

KODIAK  **423.336.2390**

Super Duty Cutter ROUNDBACK

6'

7'

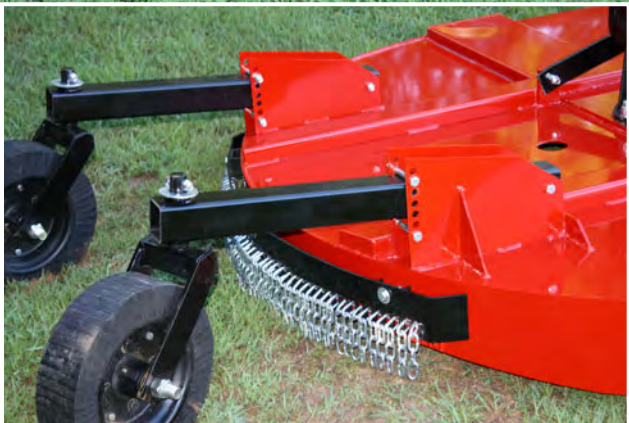

SPECIFICATIONS	
Type Hitch	CAT I or CAT II
Cutting Height	2" to 10"
Cutting Capacity	4"
Deck Thickness	3/16"
Side Bands	1/4" Channel
PTO Drive Shaft	Series 6 w/slip & 540 RPM
Slip Clutch	Standard
Stump Jumper - 6'	5/8" thick, round
Stump Jumper - 7'	3/4" thick, oblong
Gear Boxes	180 HP
Wheels	Dual Laminated
Hub	Tapered Roller Bearing
Front/Rear Chain Guard	Optional
Weight- 6'	1255 lbs.
Weight- 7'	1420 lbs.
Quick Hitch	Compatible
Skid Shoes	Replaceable

Specifications are subject to change without notice.

Built for Your Toughest Job.

Whether the job is small or a commercial application, KODIAK's Super Duty Roundback Cutter will take it on with ease. With up to 10" cutting height and a 180HP gear box, even 4" material cuts smooth and distributes evenly. This cutter delivers power, performance and longevity.

WARNING

KODIAK recommends that all customers purchase front and rear safety chain shielding in all applications to prevent injury or death.

Kodiak Implements

Finish Mower

A Perfect Finish

KODIAK's Finish Mower gives you a professional cut finish that's quick and easy. The rear discharge design facilitates even clipping distribution and allows cutting close to trees and landscaping. High blade speeds, easy and accessible maintenance points, height adjustments and affordable... this durable cutter is the choice for years of quality service.



4' 5' 6'

SIZE	4'	5'	6'
Recommended Tractor	18-50 HP	20-50 HP	22-50 HP
Overall Width	47.64 in.	59 in.	72.44 in.
No. of Blades	3	3	3
Belt Drive	v-belt b1372	v-belt b1575	v-belt b1880
Measurement	50x28x22 in.	60.5x32.5x22 in.	74x37x18.5 in.

Spreader

- easy shift lever control selects full right or left side spreading
- spreads grass seed, wheat, and fertilizer
- cone shaped anti-rust plastic hopper holds up to 6 bushel (approx.500#)
- hd gearbox and pto driveline
- tubular steel main frame



BUY KODIAK

OL' GRIZZ

Flexwing Cutter

Every KODIAK Cutter Deck is Primed Before Applying a Quality High Gloss Paint for a Lasting Finish.

15'

SPECIFICATIONS

Recommended Minimum HP	50 HP
Hitch	Swivel Pivot
Deck Thickness	7 Gauge or 3/16"
Body Depth	9.5"
Side Skirt Material	1/4" x 12"
Underneath Deck	Heavily Braced, All Sections
Center/Wing Gearbox Rating	190 HP
Splitter Gearbox Rating	235 HP
Gearcase Power Rating	540 RPM - 1000 Optional
Blades	1/2" x 4"
Blade Tip Speed	15,342 FRM
Blade Overlap	6 1/2"
Blade Carrier (5-year Warranty)	3/4" Round Disc
Cut Width	180"
Overall Width	188"
Overall Length w/ Wheel	186"
Weight	5220 lb.
Cut Height	2" - 15"
Cutting Capacity	Up To 4"
Wheel Type	5 Lug STD Laminated
Row-width Adjustable	Yes
Suspension (Shock Absorbers)	Triple Spring
Wing Flex	90° Up - 22° Down
Input PTO	ASAE CAT 8 Constant Velocity
Wing Drive PTO w/ Slip Clutch	ASAE CAT 6
Skid Shoes	Replaceable
Chain Guards - Front & Rear	Standard
Tow Chains	Standard

Specifications are subject to change without notice.

WARNING


For non-agricultural use, OSHA, ASAE, SAE and ANSI standards require the use of chain guards at all times. Kodiak strongly recommends the use of such guards for agricultural uses, as well as to reduce the risk of property damage, serious bodily injury or even death from objects thrown out by or from contact with the cutting blades.

Laminated Tires
(Optional Airplane Tires)

Wing
Hydraulic
Cylinders




GREASABLE WING HINGES
(8 fittings per wing)

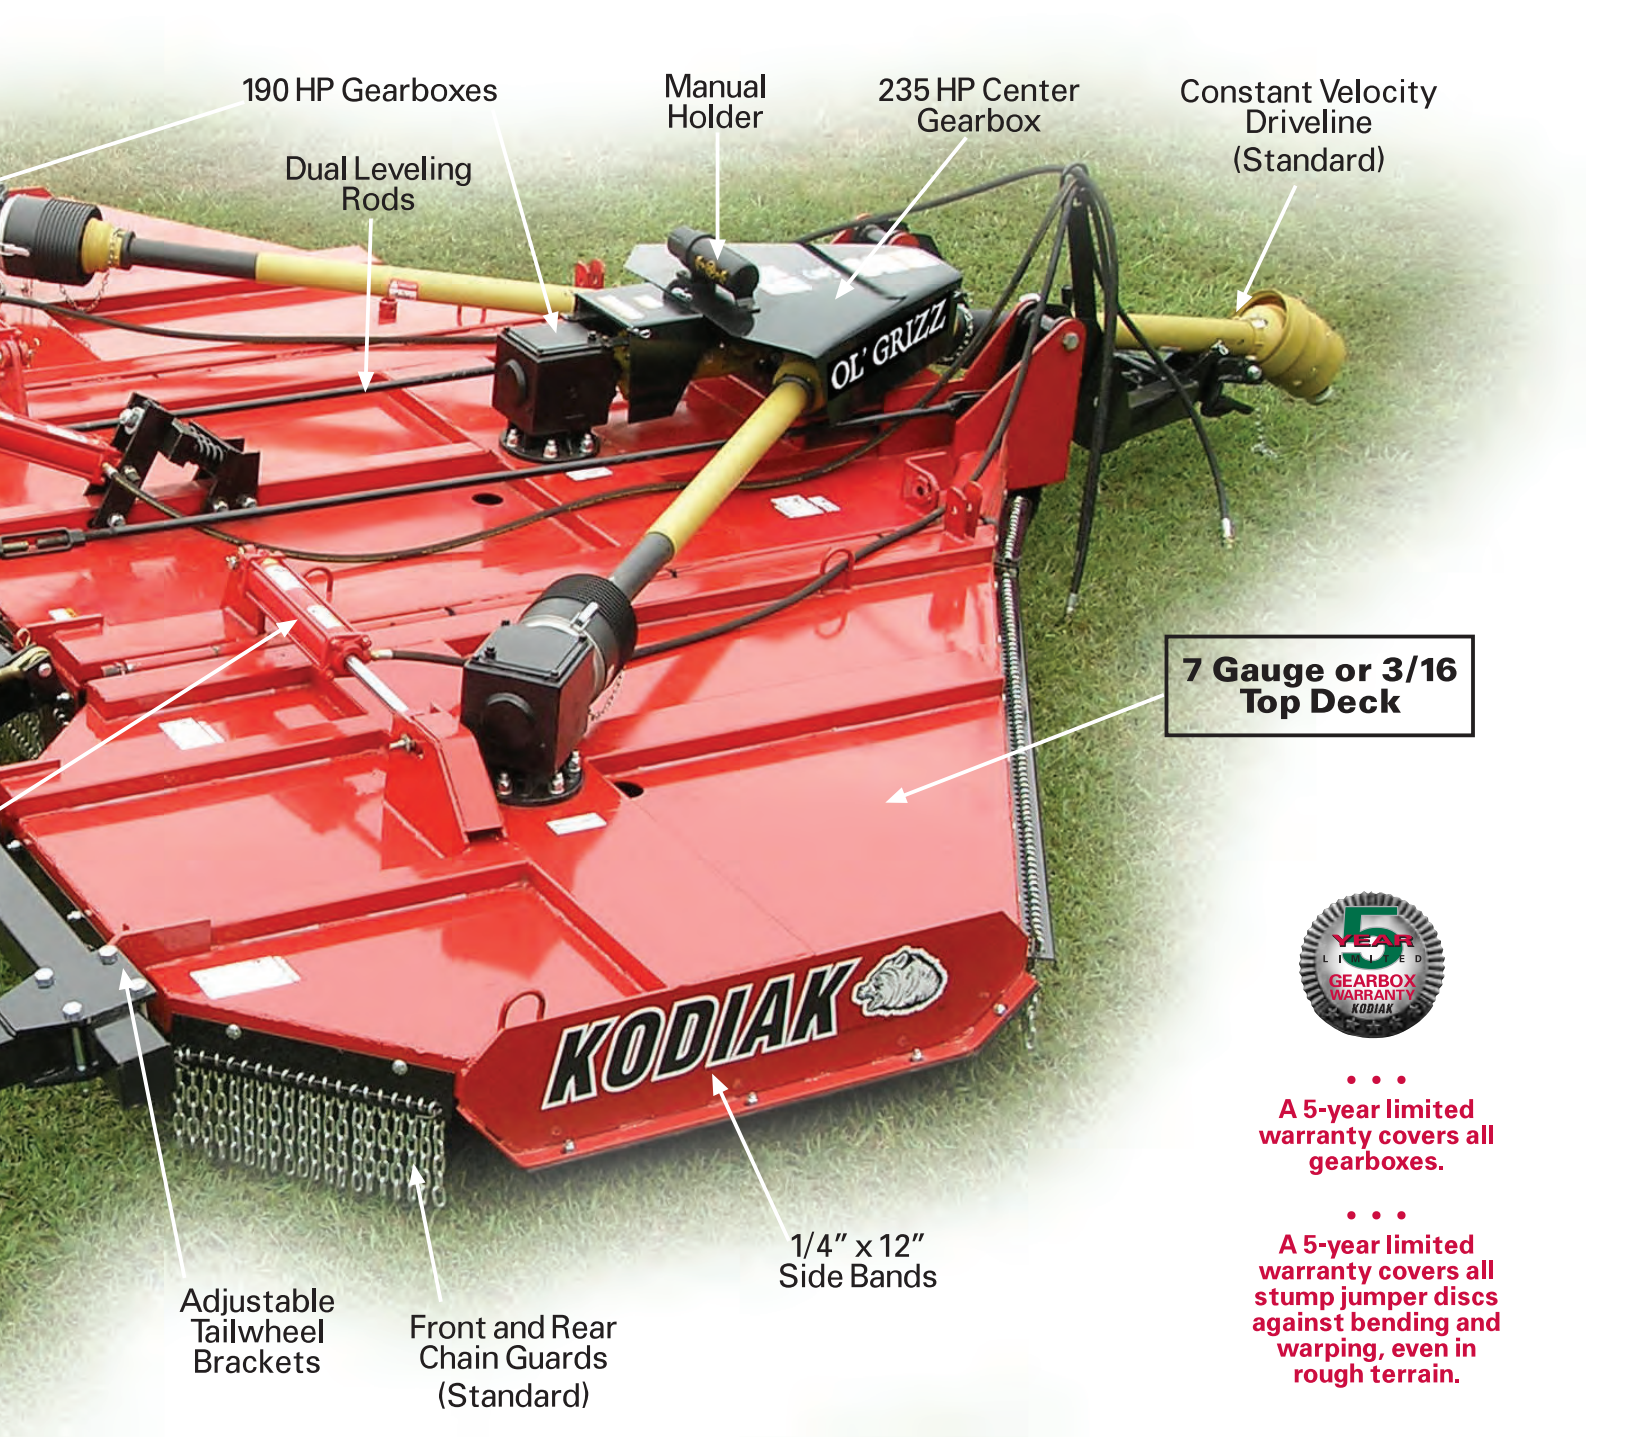

• • •
A 5-year limited warranty covers all gearboxes.

• • •
A 5-year limited warranty covers all stump jumper discs against bending and warping, even in rough terrain.

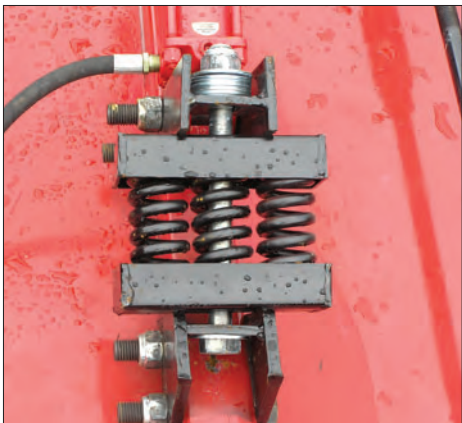

TRIPLE SPRING SHOCK ASSEMBLY
 (Tailwheel section)



SOLID STEEL STUMP JUMPER
 Round • 3/4" thick



FLAT SWIVEL HITCH
 Greatly reduces drawbar wear