


Ideal for clearing grass, weeds & light brush.



	RCR1248	RCR1260	RCR1272
Horsepower	20-50 HP		
Hitch	Cat. 1 & Cat. 1 Limited		
Working Width (cm)	48" (122)	60" (152)	72" (183)
Overall Width	53-5/8"	64-1/4"	76-1/2"
Overall Length	89-1/8"	103-3/8"	114-1/2"
Weight - lb (kg)	400 (181)	478 (217)	564 (256)
Cutting Height	1-1/4" - 10"		
Cutting Capacity	1" Diameter		
Deck Thickness	12 Gauge		
Deck Height	7-1/4"		
Safety Guards	Front and Rear Rubber Guards		
Skids	1/4" x 2" Weld on		
Blades	1/2" x 3" Heat Treated Alloy Steel Free Swinging Blades		
Blade Tip Speed	13,256 fpm	16,536 fpm	15,033 fpm
Dishpan	Round 10 Ga. x 24" Diameter, Dish Shaped		
Gearbox	540 RPM, PTO Driven Gearbox, Cast Iron Housing		
Driveline	ASAE Cat. 3, Standard - 1/2" Shear Bolt Protection Optional - Bolt 2 Plate, Slip Clutch		
Tailwheel	15" Laminated Tire w/Cast Iron Hub		

See dealer for complete warranty information.

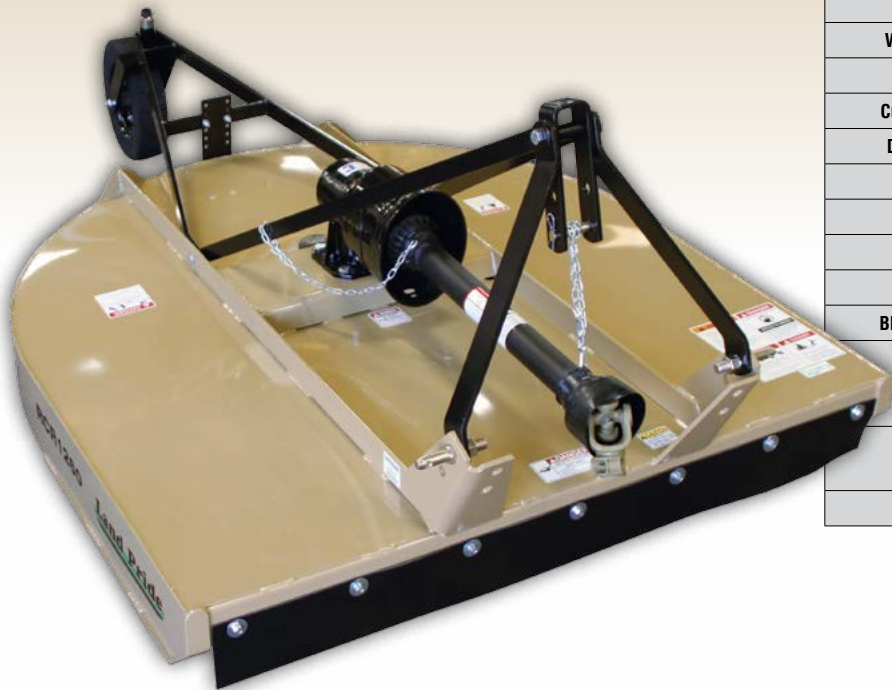

In the City or the Country
Economically priced rotary cutter for daily use in small lots and country sides, capable of cutting 1" diameter material.



- Floating 3-point permits deck to hug the terrain
- Fully welded deck to side skirt
- Dishpan with dual blades
- 360° Degree swivelling tailwheel
- Optional bolt on skid shoes for 60" & 72"