
EATHENS =

MODEL 47

LIFT TYPE DISK HARROW



THE 47 IS THE NEWEST OF THE ATHENS THREE POINT DISKS. PROVEN AS A FINISHING, INCORPORATING, MULCHING AND FRESHENING HARROW, THE 47 IS IDEAL FOR WEEKENDERS, FARMERS, ORCHARDISTS, AND VINEYARDISTS. IT'S TOTALLY ATHENS IN EVERY SENSE OF THE WORD.

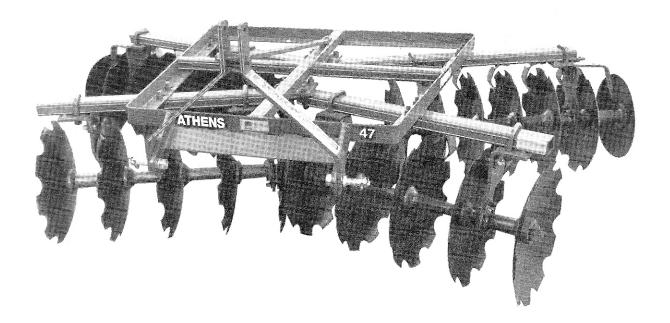

ATHENS PLOW COMPANY, INC.

P. O. BOX 609

ATHENS, TENNESSEE 37371-0609

47 LIFT TYPE DISK HARROW

SPECIFICATIONS

WIDTH OF CUT	NO. OF DISKS	NUMBER OF BRGS.	APPROX WEIGHT	DBHP
6'3" 6'5"	16 18, 20	8 8	692 735	25 25
7'6"	22, 24	8	812	30
7'9"	20	8	772	30
	6'3" 6'5" 7'6"	OF CUT DISKS 6'3" 16 6'5" 18, 20 7'6" 22, 24	OF CUT DISKS OF BRGS. 6'3" 16 8 6'5" 18, 20 8 7'6" 22, 24 8	OF CUT DISKS OF BRGS. WEIGHT 6'3" 16 8 692 6'5" 18, 20 8 735 7'6" 22, 24 8 812

Number of disks vary with the combination of spacing. 7", 9", or 9" front 7" rear.

STANDARD EQUIPMENT:

CATEGORY 1 HITCH
1" SQUARE C1045 STEEL AXLE
FACTORY ASSEMBLED DISK GANGS
TRIPLE-LIP SEALED BALL BEARINGS
ADJUSTABLE ANGLE OF CUT

OPTIONAL EQUIPMENT:

18" OR 20" DISK BLADES, CUTOUT OR SMOOTH DISK SPACING, 7", 9" OR 9" FRONT AND 7" REAR.

EXTRA EQUIPMENT:

DISK SCRAPERS

FEATURES

CATEGORY 1 HITCH WHICH IS BRACED AND SECURED TO THE WELDED FRAME.

FACTORY ASSEMBLED GANGS.


STURDY 2"x3" STEEL TUBING USED FOR THE GANG FRAMES. GANGS CAN BE ADJUSTED FOR CUTTING ANGLES FROM 15° TO 20°.

ATHENS PLOW CO., INC. guarantees each piece of equipment against defective materials and workmanship for a period of one year from the date of delivery to the purchaser unless otherwise specified.

ATHENS PLOW CO., INC. reserves the right to make changes and/or improvements in design and construction of parts or machines without notice or obligation.

HEAVY-DUTY BEARING HANGERS.

RIGID BEARING HANGERS HOLD BEARINGS IN **PERFECT** ALIGNMENT AND ASSURE GANG RIGIDITY FOR FREE TURNING DISKS.

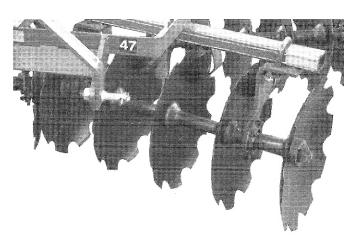

SELF-ALIGNING, FLANGETTE-MOUNTED, SEALED BALL BEARINGS, FEATURE TRIPLE-LIP SEALS THAT NEVER NEED LUBRICATION AND PROVIDE LONG LIFE, AND LOW MAINTENANCE.

FRAME DESIGN.

THE RUGGED FRAME OF THE ATHENS 47 IS CONSTRUCTED OF ANGLE AND STEEL TUBING THAT IS WELDED INTO A UNITIZED ASSEMBLY FOR STRENGTH AND DURABILITY.

CHOICE OF DISKS.

18" OR 20" CUTOUT OR SMOOTH DISK BLADES ARE SPACED 7", 9", OR 9" ON FRONT AND 7" ON REAR ARE OFFERED ON THE MODEL 47. CAST IRON SPACERS AND HALF SPACERS ARE ARBOR-MACHINED ON BOTH ENDS FOR A PRECISE FIT WITH THE DISKS AND BEARINGS.

ATHENS PLOW COMPANY, INC.

P. O. BOX 609 ATHENS, TENNESSEE 37371-0609